

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division
811 S. 1st Street
Artesia, NM 88210-2834

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.

NM-31947

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Nickey RF Federal #3

9. API Well No.

30-005-63044

10. Field and Pool, or Exploratory Area

Pecos Slope Abo

11. County or Parish, State

Chaves Co., NM

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

DEC 03 '96

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1470 C. D.

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

ARTESIA, OFFICE

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2310' FSL & 2310' FWL of Section 19-T7S-R26E (Unit K, NESW)

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice



TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Production casing & cement
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water
(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

TD 4330'. Reached TD at 7:30 PM 11-9-96. Ran 101 joints of 4-1/2" 10.5# 8rd J-55 LT&C (4313.83') of casing set at 4324'. Guide shoe set at 4324'. Float collar set at 4277'. Cemented with 50 sacks "C", 1/4#/sack celloseal and .3% SM (preflush) (yield 2.75, weight 11.4). Tailed in with 350 sacks Super Modified C, 8#/sack gilsonite, 3.28# salt, .31% FL52 and .32% FL25 (yield 1.69, weight 13.0). PD 12:00 PM 11-10-96. Bumped plug to 1800 psi for 3 minutes, OK. WOC. Released rig at 4:00 PM 11-10-96.

Waiting on completion unit.

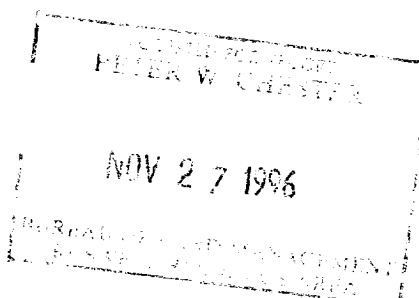

14. I hereby certify that the foregoing is true and correct

Signed

Rusty Kline

Title Operations Technician

Date Nov. 13, 1996

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date