

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

990' FNL & 990' FEL of Section 15-T6S-R25E (Unit A, NENE)

5. Lease Designation and Serial No.

NM-14755

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Powers OL Federal Com #13

9. API Well No.

30-005-63096

10. Field and Pool, or Exploratory Area

Pecos Slope Abo

11. County or Parish, State

Chaves Co., NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice


TYPE OF ACTION

- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other Perforate & frac  
☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

4-2-97 - TIH with 3-3/8" casing guns and perforated 3855-3869' w/29 .38" holes (2 SPF). TOOH with casing guns and rigged down wireline. Nipped down BOP. Nipped up 4-1/2" frac valve. Frac'd perforations 3780-3918' with 138,350 gallons 30# crosslink gel and 240000# 16-30 Brady sand. Shut well in for 2 hours. Opened well up. Nipped up BOP. TIH with 2-3/8" tubing and tagged sand at 3600'. Washed sand down to 4130' (PBDT). Circulated well clean. Pulled up and set seating nipple at 3722'. Nipped down BOP. Nipped up wellhead. Swabbing.  
4-3-97 - Continue to swab.  
4-4-97 - Continue to swab.  
4-5-97 - Flow testing well. Released well to production department.

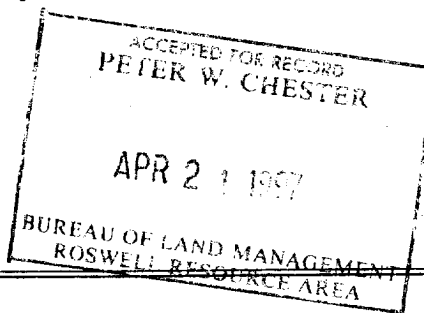

RECEIVED

APR 11 1997

ROSWELL, NM

14. I hereby certify that the foregoing is true and correct

Signed

*Rusty Klein*

Title Operations Technician

Date April 9, 1997

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date