

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

N.M. OFFICE  
Allesia, NM 88210 2834

RECEIVED

1997 JUL 28

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

5. Lease Designation and Serial No.

NM-28162

Indian Allottee or Tribe Name

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different surface.  
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

JUL 31 1997

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FNL & 1980' FWL of Section 3-T7S-R25E (Unit C, NENW)

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Thorpe MI Federal #16

9. API Well No.

30-005-63129

10. Field and Pool, or Exploratory Area

Pecos Slope Abo

11. County or Parish, State

Chaves Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION


☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other Production casing & cmt  
☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

TD 4060'. Reached TD at 2:30 AM 7-16-97. Ran 94 joints of 4-1/2" 10.5# J-55 (4063.03') of casing set at 4055'. Float shoe set at 4055'. Float collar set at 4010'. Bottom marker set at 3515'. Cemented with 50 sacks Class "C", 3% SM, and 1/4#/sack celloflake (yield 2.87, weight 11.4). Tailed in with 350 sacks Super C Modified, .3% FL-52, 4#/sack salt and 8#/sack gilsonite (yield 1.71, weight 13.0). PD 4:15 PM 7-16-97. Bumped plug to 1000 psi for 1 minute, OK. WOC. Released rig at 8:00 PM 7-16-97. NOTE: Displaced with KCL.

Waiting on completion unit.

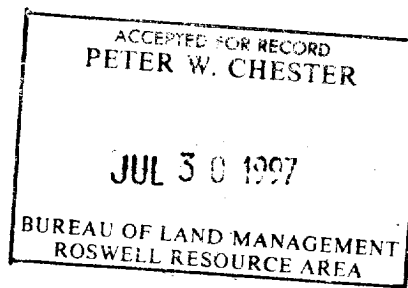

14. I hereby certify that the foregoing is true and correct

Signed

Title Operations Technician

Date July 25, 1997

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: