Form 3160-3 (A@gus 1999)

ROS WEE SHILL DESPRICE

N.M. Oil Cons. DIV-Dist.

OMB No.

DEPARTMENT OF THE IN 1530 W. Grand Avenue Lease Serial No. BUREAU OF LAND MANAC NMNM31099 Artesia NM 88210

APPLICATION FOR PERMIT	TO DRILL OR REENTER	6. If Indian, Allottee or Tribe Nam	e
1a. Type of Work: ☑ DRILL ☐ REENTER		7. If Unit or CA Agreement, Name	and No.
1b. Type of Well: ☐ Oil Well ☐ Gas Well ☐ Oth	ner Single Zone	8. Lease Name and Well No. HORN YG FEDERAL COM.	6
2. 1. mile of a parameter	ROBERT ASHER E-Mail: landdept@ypcnm.com	9. API Well No. 30 -005-63462	_
3a. Address 105 S. 4TH ARTESIA, NM 88210	3b. Phone No. (include area code) Ph: 505.768.4364 Fx: 505.748.4572	10. Field and Pool, or Exploratory UNKNOWN WC 1055 EM 6	1
4. Location of Well (Report location clearly and in accorda	nce with any State requirements 456	11. Sec., T., R., M., or Blk. and Su	rvey or Area
At surface SENE 1830FNL 660FEL At proposed prod. zone SENE 1830FNL 660FEL	W. 1 333 A	Sec 15 T8S R26E Mer NN	ИP
Distance in miles and direction from nearest town or post of APPROX. 18 MILES NORTHEAST FROM ROS	office*	12. County or Parish CHAVES	13. State NM
 Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 990 	16. No. of Acres in Lease 1	17. Spacing Unit dedicated to this 320.00	well
 Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 4600 	19. Proposed Depth 6560 MD	20. BLM/BIA Bond No. on file	
21. Elevations (Show whether DF, KB, RT, GL, etc. 3874 GL	22. Approximate date work will start 23. Estimated duration 30 DAYS		
	24. Attachments		
The following, completed in accordance with the requirements o	f Onshore Oil and Gas Order No. 1, shall be attached to t	this form:	
Well plat certified by a registered surveyor. A Drilling Plan. A Surface Use Plan (if the location is on National Forest Systems Supposed Supposed by the Supposed Suppose	Item 20 above). 5. Operator certification	ons unless covered by an existing bone formation and/or plans as may be requ	
25. Signature (Electronic Submission)	Name (Printed/Typed) PATRICIA PEREZ Ph: 505.748.4372	Dat 11	e 1/26/2001
Title			

REGULATORY AGEN Approved by (Signature)

Name (Printed/Typed)

/S/LARRY D. BRAY

MAR 2 9 2002

Title Assistant Field Manager,

Office

INCOMPLE MELD OFFICE

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

APPROVED FOR TYPING

Electronic Submission #9311 verified by the BLM Well Information System For YATES PETROLEUM CORPORATION, sent to the Roswell Committed to AFMSS for processing by Armando Lopez on 11/28/2001 (02AL0005AE) DISTRICT | 1625'N. Prench Dr., Hobbs, NM 88240
DISTRICT II 811 South First, Artesia, NM 88210
DISTRICT III 1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV 2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico

Energy, Minerals and Natural Resources Department

Form C-102
Revised March 17, 1999
Instruction on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OIL CONSERVATION DIVISION P.O. Box 2088 Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool N	lame
		Wildcat B	Basement
Property Code	Property	Property Name	
	HORN "YG" FED	ERAL COM.	6
OGRID No.	Operator	Elevation	
025575	YATES PETROLEUM	3874	

Surface Location

UL o	lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
	1	15	<i>8</i> S	26E		1830	NORTH	660	EAST	CHAVES

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	lot len	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres	Joint o	r Infill	Consolidation (Code One	der No.				
320									


NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

ON A NON BIRNDARD ONLY HAS BEEN ATTROVED BY THE DIVISION							
		NM - 31099	OPERATOR CERTIFICATION I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief. Signature				
		3870 3881 6-660'- 3868 3887 N.33*37'19.8" W.104*16'42.0"	Pat Perez Printed Name Regulatory Agent Title 11-20-01 Date SURVEYOR CERTIFICATION				
***		990' Horn "YG" fed. Com. #7	I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervison, and that the same is true and correct to the best of my betief. 11/07/2001 Date Surveyed Signature & Soul-A				
		NM-20346	Professional Surveyor Certificate No. Serschel Sores RLS 3640 ADRA 6 CENTERE SURVEYOR COMPANY				

Additional Operator Remarks:

NO REMARK PROVIDED




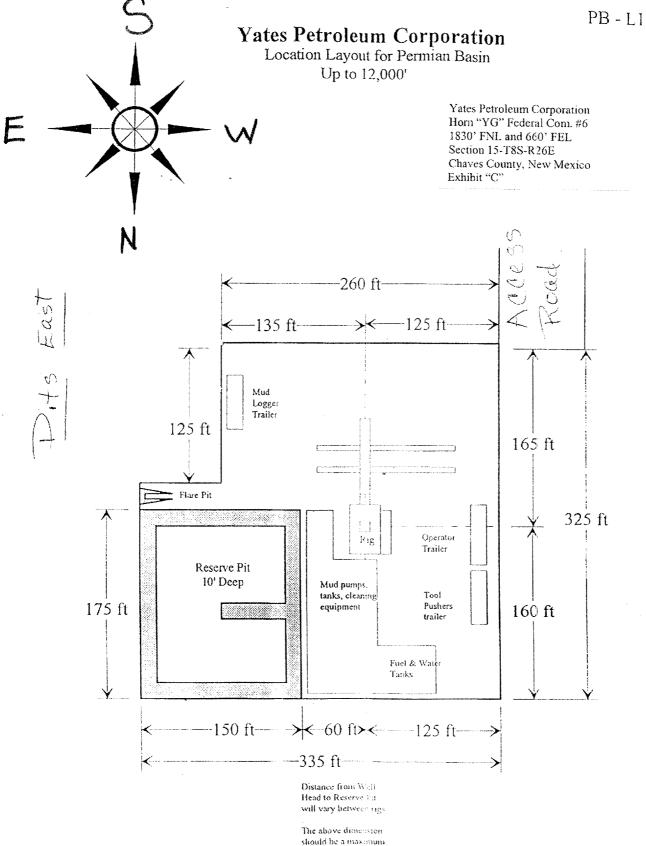





Yates Petroleum Corporation

Typical 2,000 psi Pressure System
Schematic
Double Ram Preventer Stack

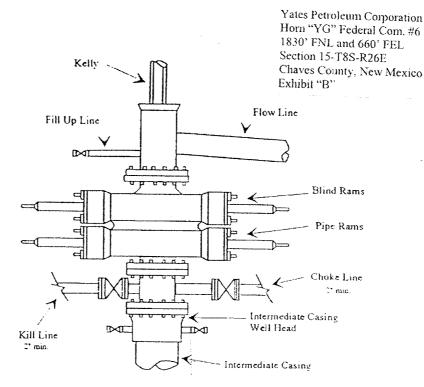

Typical 2,000 psi choke manifold assembly with at least these minimun features

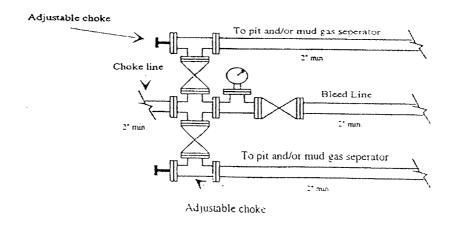

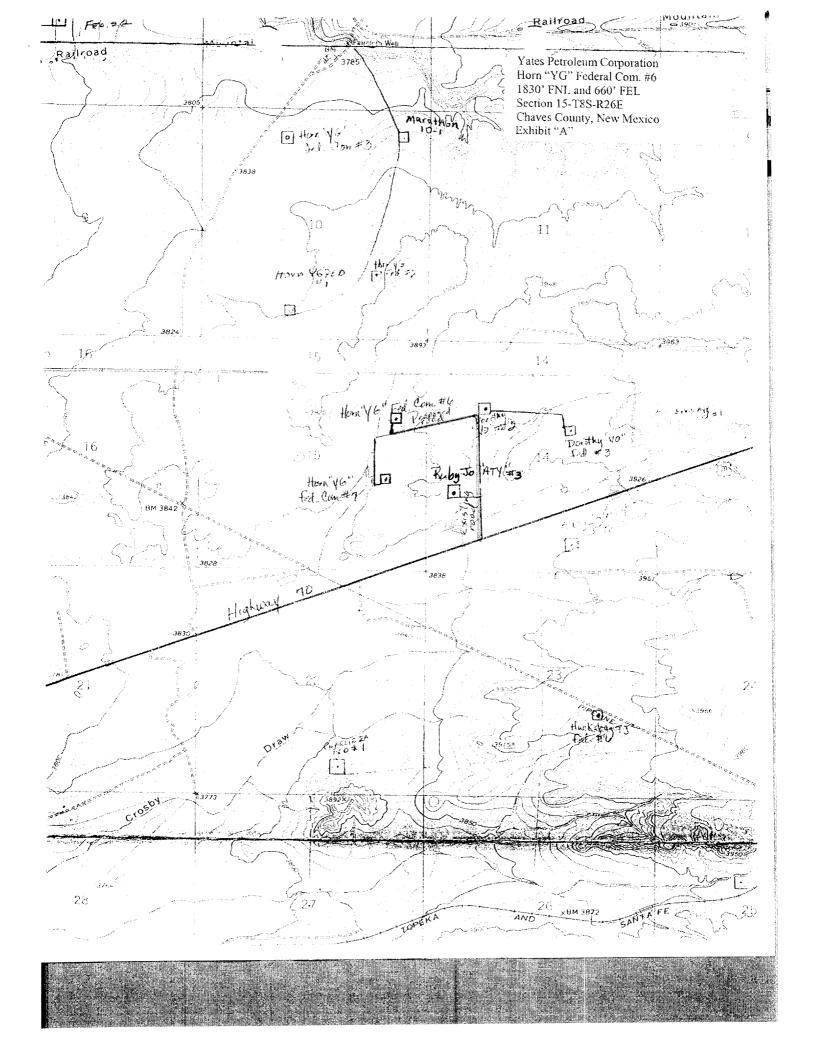

YATES PETROLEUM CORPORATION Horn "YG" Federal Com. #6

1830' FNL and 660' FEL Section 15-T8S-R26E Chaves County, New Mexico

1. The estimated tops of geologic markers are as follows:

San Andres	1035'	Cisco	5685'
Glorieta	2130'	Strawn	5805'
Yeso	2255'	Mississippian	6040'
Tubb	370 5 '	Siluro-Devonian	6160'
Abo	4435'	Basenent	6410'
Wolfcamp	5110'	TD	6560'

2. The estimated depths at which anticipated water, oil or gas formations are expected to be encountered:

Water:

(i : 1 •

250'-350'

Oil or Gas: All potential formations.

3. Pressure Control Equipment: BOPE will be installed on the 8 5/8" casing and rated for 2000# BOP systems will be consistent with API RP 53. Pressure tests will be conducted before drilling out from under all casing strings, which are set and cemented in place. Blowout Preventor controls will be installed prior to drilling the surface plug and will remain in use until the well is completed or abandoned. Preventors will be inspected and operated at least daily to ensure good mechanical working order, and this inspection recorded on the daily drilling report. See Exhibit B.

Auxiliary Equipment:

- A. Auxiliary Equipment: Kelly cock, pit level indicators, flow sensor equipment and a sub with full opening valve to fit the drill pipe and collars will be available on the rig floor in the open position at all times for use when kelly is not in use.
- 4. THE PROPOSED CASING AND CEMENTING PROGRAM:
 - A. Casing Program: (All New)

Hole Size	Casing Size	Wt./Ft	<u>Grade</u>	Coupling	<u>Interval</u>	<u>Length</u>
12 1/4"	8 5/8"	24#	J-55	ST&C	0-1000'	1000'
7 7/8"	5 1/2"	15.5#	J-55	ST&C	0-6560'	6560'

- 1. Minimum Casing Design Factors: Collapse 1.125, Burst 1.0, and Tensile Strength 1.8
- 2. A 2,000 psi BOP will be nippled up on the 8 5/8" casing and tested to 1000 psi. YPC requests a variance be granted in requiring the casing and BOPE to be tested to 2000 psi to testing the casing and BOPE to 1000 psi. The rig pumps will be used to test the casing and BOPE. Rig pumps used in this area cannot safely test above 1000 psi. We would have to go to the greater expense of hiring an independent service company to do the testing. Also, the bottom hole pressure in this field is proven to be near 1000 psi. A shut in surface pressure would be less than 1000 psi. We feel that a 1100 psi test will demonstrate that the BOPE is functioning properly, and in the unlikely event of a gas influx that the BOPE would be sufficient to control the well.

Horn "YG" Federal Com. #6 Page 2

والتهي

B. CEMENTING PROGRAM:

Surface Casing: Cement with 325 sx Lite "C" (YLD 2.0 WT 12.5). Tail in with

200 sx "C" + 2% CaCl2 (YLD 1.33 WT 15.6).

Production Casing: 550 sx PVL (YLD 1.34 WT 13). TOC 3900'.

5. MUD PROGRAM AND AUXILIARY EQUIPMENT:

Interval	<u>Type</u>	<u>Weight</u>	<u>Viscosity</u>	Fluid Loss
0-1000'	FW GEL/Paper/LCM	8.6-9.6	32-36	N/C
1000'-4400'	Brine	10.0-10.2	28	N/C
4400'-6560'	Starch/Salt Gel	9.3-10.2	32-40	<6CC

Sufficient mud material(s) to maintain mud properties, control lost circulation and contain a blow out will be available at the well site during drilling operations. Mud will be checked hourly by rig personnel.

6. EVALUATION PROGRAM:

Samples: 10' samples out from under surface casing.

Logging: Platform Express, CNL/LDT W/NGT to TD to surface casing, w/ GR/CNL TD

to surface, DLL/MSFL TD to surface casing, BHC Sonic TD to surface casing;

FMI TD - top of Wolfcamp; CMR over Strawn Sands.

Coring: Sidewall DST's: None

7. ABNORMAL CONDITIONS, BOTTOM HOLE PRESSURE, AND POTENTIAL HAZARDS:

Anticipated BHP:

From: 0 TO: 1000' Anticipated Max. BHP: 400 PSI From: 1000' TO: 6560' Anticipated Max. BHP: 3000 PSI

Abnormal Pressures Anticipated: None

Lost Circulation Zones Anticipated: None.

H2S Zones Anticipated: None Anticipated

Maximum Bottom Hole Temperature: 145 F

8. ANTICIPATED STARTING DATE:

Plans are to drill this well as soon as possible after receiving approval. It should take approximately 15 days to drill the well with completion taking another 15 days.

MULTI-PC T SURFACE USE AND OPERATIONS PLAN INTES PETROLEUM CORPORATION Horn "YG" Federal Com. #6 1830' FNL and 660' FEL Section 15-T8S-R26E

Section 15-18S-R26E Chaves County, New Mexico

This plan is submitted with Form 3160-3, Application for Permit to Drill, covering the above described well. The purpose of this plan is to describe the location of the proposed well, the proposed construction activities and operations plan, the magnitude of the surface disturbance involved and the procedures to be followed in rehabilitating the surface after completion of the operations, so that a complete appraisal can be made of the environmental effect associated with the operations.

1. EXISTING ROADS:

Exhibit A is a portion of the BLM map showing the well and roads in the vicinity of the proposed location. The proposed well site is located approximately 18 miles northeast of Roswell, New Mexico and the access route to the location is indicated in red and green on Exhibit A.

DIRECTIONS:

Go east of Roswell on Highway 70 to the Acme School House. Continue east of the school house on Hwy 70 for approx 3.6 miles. Just before mile marker 355 turn north on the access road to the Dorothy Federal #2. The access road will start here and go west following the Agave pipeline for approximately 0.5 of a mile. The road will turn right(north) going to the southwest corner of the location.

2. PLANNED ACCESS ROAD:

250

- A. The proposed new access will be approximately 0.50 of a mile in length from the point of origin to the southwest corner of the drilling pad. The road will go west approx. 0.5 miles.
- B. The new road will be 14 feet in width (driving surface) and will be adequately drained to control runoff and soil erosion.
- C. The new road will be bladed with drainage on both sides. No traffic turnout will be built.
- D. The route of the road is visible.
- E. Existing roads will be maintained in the same or better condition.

3. LOCATION OF EXISTING WELL:

- A. There is drilling activity within a one-mile radius of the well site.
- B. Exhibit D shows existing wells within a one-mile radius of the proposed well site.

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES:

- A. There are production facilities on this lease at the present time.
- B. In the event that the well is productive, the necessary production facilities will be installed on the drilling pad. If the well is productive oil, a gas or diesel self-contained unit will be used to provide the necessary power. No power will be required if the well is productive of gas.

Horn "YG" Federal Com. #6 Page 2

5. LOCATION AND TYPE OF WATER SUPPLY:

A. It is planned to drill the proposed well with a fresh water system. The water will be obtained from commercial sources, possibly in Roswell, and will be hauled to the location by truck over the existing and proposed roads shown in Exhibit A.

6. SOURCE OF CONSTRUCTION MATERIALS:

The dirt contractor will be responsible for finding a source of material for construction of road and pad and will obtain any permits which may be required.

7. METHODS OF HANDLING WASTE DISPOSAL:

A. Drill cuttings will be disposed of in the reserve pits.

B. Drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry.

C. Water produced during operations will be collected in tanks until hauled to an approved disposal system, or separate disposal application will be submitted.

D. Oil produced during operations will be stored in tanks until sold.

E. Current laws and regulations pertaining to the disposal of human waste will be complied with.

All trash, junk, and other waste materials will be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not approved.

8. ANCILLARY FACILITIES: NONE

9. WELLSITE LAYOUT:

A. Exhibit C shows the relative location and dimensions of the well pad, the reserve pits, the location of the drilling equipment, rig orientation and access road approach. Note: Pits to East Southeast.

B. The reserve pits will be plastic lined.

C. A 400' x 400' area has been staked and flagged.

10. PLANS FOR RESTORATION:

A. After finishing drilling and/or completion operations, all equipment and other material not needed for further operations will be removed. The location will be cleaned of all trash and junk to leave the well site in as aesthetically pleasing a condition as possible.

B. Unguarded pits, if any, containing fluids will be fenced until they have dried and

been leveled.

C. If the proposed well is non-productive, all rehabilitation and/or vegetation requirements of the Bureau of Land Management will be complied with and will be accomplished as expeditiously as possible. All pits will be filled level after they have evaporated and dried.

Roswell, New Mexico. Approximately 1300' of new road is on surface owned by Cooper Revocable Trust clo Carl Cooper. P.O. Box 2148, Roswell, New Mexico 88202-2148. Yates Petroleum Corporation has reached an agreement to SURFACE OWNERSHIP: The location is on Federal surface administered by the BLM,

compensate him for surface damage on lands owned by them.

12. OTHER INFORMATION:

Topography: Refer to the existing archaeological report for a description of the topography, flora, fauna, soil characteristics, dwellings, and historical and cultural Ä

The primary surface use is for grazing.

OPERATOR'S REPRESENTATIVE:

Pinson McWhorter, Operations Manager Through Drilling, Completions & Prod. Yates Petroleum Corporation Artesia, New Mexico 88210 05 South Fourth Street Phone (505) 748-1471 <u>ത</u> Patricia Perez, Regulatory Agent Yates Petroleum Corporation Artesia, New Mexico 88210 Phrough A.P.D. Approval: 105 South Fourth Street Phone (505) 748-1471 Ċ

14. CERTIFICATION:

Petroleum Corporation and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the the statements made in this plan are to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Yates eril site and access route, that I am familiar with the conditions which presently exist; that hereby certify that I, or persons under my direct supervision, have inspected the proposed provisions of 18 U.S.C. 1001 for the filing of a false statement.

Regulatory Agent

