# N.M. Oil Cons. DIV-Dist. ? . 1301 W. Grand Avenue



Form 3160 TO SULP OF THE PARTY	sia,	NM 88210	-			
Form 3160 37 JUL 2015 D				0		
(August 1992) RECENTESIA				OMB No. 1004-0136		
ONITED STATE		ND.		Expires November 30, 2000  5. Lease Serial No.		
DEPARTMENT OF THE I		)K		S. Lease Serial No. NM-27791		
1207CU				6. If Indian, Allottee or Trib		
APPLICATION FOR PERMIT TO D	RILL O	R REENTER		Not Applic		
				7. If Unit or CA Agreement		
1a. Type of Work: X DRILL REENTER				Not Applic	able	
b. Type of Well: Oil Well Gas Other		Single Zone	Multiple Zone	Zane "ABS" Fede		
2. Name of Operator		Zone		9. API Well No.		
Yates Petroleum Corporation 25575				30-005	-63493	
3A. Address 105 South Fourth Street	3b. Pho	ne No. (include area code	2)	10. Field and Pool, or Explo		
Artesia, New Mexico 88210		(505) 748-147	1	Undesignated F		
4. Location of Well (Report location clearly and in accordance with an	y State red	quirements.*)		11. Sec., T., R., M., or Blk, and Survey or Area		
At surface 660' FSL and 7	60' FEL	., Unit P				
_ 1	as abo	ve		Section 15, TS	<del></del>	
14. Distance in miles and direction from nearest town or post office*				12. County or Parish	13. State	
Approximately twenty (20) miles northeast of Ros 15. Distance from proposed*			17 C II	Chaves County	NM	
location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No.	of Acres in lease	17. Spacing Or	nit dedicated to this well		
18. Distance from proposed location*	10 Pro	240 posed Depth	20 BLM/BIA	320 acres - E/2 IA Bond No. on file		
to nearest well, drilling, completed, applied for, on this lease, ft	19. 110	6480'	20. BEWINDIA	NM-2811		
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Ap	22. Approximate date work will start*  23. Estimated duration				
3789' GL		ASAP 30 Days			S	
	24.	Attachments	well cu	ATROLLED WATE	KRV2IM	
The following, completed in accordance with the requirements of Onsho	re Oil and	Gas Order No. 1, shall be	e attached to this	form:		
Well plat certified by a registered surveyor.		4. Bond to cove	r the operations	s unless covered by an existing	bond on file (see	
2. A Drilling Plan.		Item 20 abov	re).			
3. A Surface Use Plan (if the location is on National Forest System Land	ds, the	5. Operator certi	fication.			
SUPO shall be filed with the appropriate Forest Service Office.  6. Such other site specific information and/or plans as may be required by the authorized office.						
25. Signature		Name (Printed/Typed)		Date		
Vot Voso		Pat Perez		1	3/12/02	
Title:			······································			
Regulatory Agent						
Approved by (Signature)  ASLARRY D. BHAY		Name (Printed/Typed)	-	Date	JL 1 0 2392	
Title Assistant Field Manager Office						
Application approval does not warrant or certify that the applicant holds	legal or e	quitable title to those righ	nts in the subject	lease which would entitle the a	applicant to conduct	
operations thereon.						
Conditions of approval, if any, are attached.					100000	
Title 18 U.S.C. Section 1001and Title 43 U.S.C. Section 1212, make it States any false, fictitious or fraudulent statements or representations as				ake to any department or agend	cy of the United	

\*(Instructions on reverse)

BUREAU U- UCO MOMI

2002 MAR 12 PM 1:56

BECEINED

DISTRICT I 1625 N. French Br., Hobbs, 101 88240 DISTRICT II 811 South Pirst, Artesia, NM 88210

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV 2040 South Pacheco, Santa Fe, NM 87505

DISTRICT III

DIRIG OF LICH MEYICO Energy, Minerals and Natural Resources Department

Revised March 17, 1999 Instruction on back Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

### OIL CONSERVATION DIVISION

P.O. Box 2088


Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number			Pool Code Pool Name						
					1	Undesig	nated Foor I	Ranch	
Property Code					Property Nam	Well Number			
ZANE "ABS" FEDERAL COM.									
OGRID No	o. Operator Name YATES PETROLEUM CORPORATION					Elevation 3789			
025575		<u> </u>	INIES TEMOLESM Sold Statute.						
					Surface Loca	ation			
	O- offen	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
UL or lot No.	Section 15	95	26E		660	SOUTH	760	EAST	CHAVES
		J	Bottom	Hole Los	cation If Diffe	rent From Sur	face		
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
		Ì						<u> </u>	<u> </u>
Dedicated Acre	Joint	or Infill C	onsolidation	Code Or	der No.				
320									

### NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

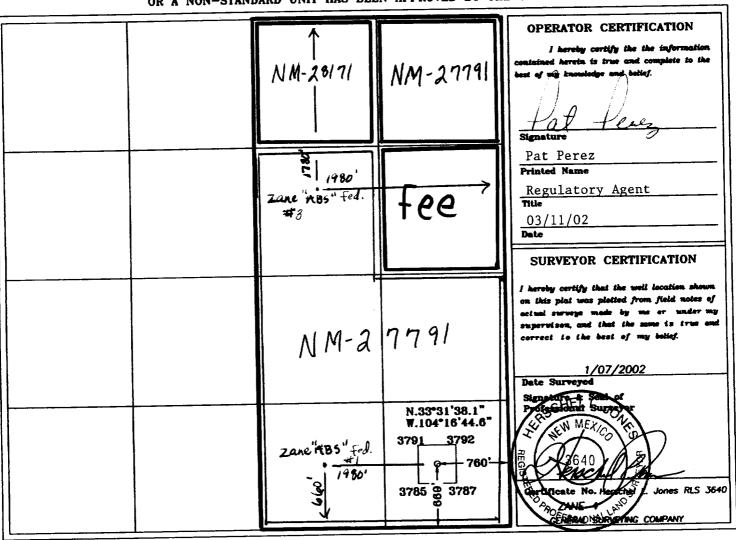

# YATES PETROLEUM CORPORA ON Zane "ABS" Federal Com. #4

660' FSL and 760' FEL Section 15-T9S-R26E Chaves County, New Mexico

1. The estimated tops of geologic markers are as follows:

San Andres	1035'
Glorieta	2115'
Yeso	2235'
Tubb	3655'
Abo	4430'
Wolfcamp	5195'
Cisco	5813'
Penn Clastics	5901'
Mississipian	6085'
Ordovician	6135'
Basement	6330'
TD	6480'

2. The estimated depths at which anticipated water, oil or gas formations are expected to be encountered:

Water:

er: 150'-200'

Oil or Gas: All potential zones.

3. Pressure Control Equipment: BOPE will be installed on the 8 5/8" casing and rated for 2000 BOP systems will be consistent with API RP 53. Pressure tests will be conducted before drilling out from under all casing strings which are set and cemented in place. Blowout Preventor controls will be installed prior to drilling the surface plug and will remain in use until the well is completed or abandoned. Preventors will be inspected and operated at least daily to ensure good mechanical working order, and this inspection recorded on the daily drilling report. See Exhibit B.

#### **Auxiliary Equipment:**

- A. Auxiliary Equipment: Kelly cock, pit level indicators, flow sensor equipment and a sub with full opening valve to fit the drill pipe and collars will be available on the rig floor in the open position at all times for use when kelly is not in use.
- 4. THE PROPOSED CASING AND CEMENTING PROGRAM:
  - A. Casing Program: (All New)

Hole Size	Casing Size	Wt./Ft	<u>Grade</u>	Coupling	Interval	<del></del>
12 1/4	8 5/8"	24#	J-55	ST&C	0-1100'	TWESS
7 7/8"	5 1/2"	15.5#	J-55	ST&C	0-6480'	

1. Minimum Casing Design Factors: Collapse 1.125, Burst 1.0, Tensile Strength 1.8

2. A 2,000 psi BOP will be nippled up on the 8 5/8" casing and tested to 1000 psi. YPC requests a variance be granted in requiring the casing and BOPE to be tested to 2000 PSI to testing the casing and BOPE to 1000 PSI. The rig pumps will be used to test the casing and BOPE. Rig pumps used in this area cannot safely test above 1000 PSI. We would have to go to the greater expense of hiring an independent service to do the testing. Also, the bottom hole pressure in this field is proven to be near 2200 psi. A shut in surface pressure would be less than 1000 psi. We feel that a 1100 psi test will demonstrate that the BOPE is functioning properly, and in the unlikely event of a gas influx that the BOPE would be sufficient to control the well.

## Zane "ABS" Federal Com. #4 Page 2

#### A. CEMENTING PROGRAM:

Surface Casing: 350 sx Lite "C" (YLD 2.0 WT 12.5). Tail in with 200 sx "C" WITH SS + 2% CaCL2 (YLD 1.33 WT 15.6).

Production Casing: 550 sx Pecos Valley Lite (YLD 1.34 WT 13.0). TOC 3800'.

#### MUD PROGRAM AND AUXILIARY EQUIPMENT:

Interval	<u>Type</u>	<u>Weight</u>	<u>Viscosity</u>	Fluid Loss
0-1100'	FW GEL, Paper, LCM	8.6 <b>-</b> 9.6	32-36	N/C
1100'-4340'	Brine	10.0-10.2	28	N/C
4340'-6480'	Starch/Salt Gel	9.3 -10.2	32-40	<6/cc

Sufficient mud material(s) to maintain mud properties, control lost circulation and contain a blow out will be available at the well site during drilling operations. Mud will be checked hourly by rig personnel.

#### 6. EVALUATION PROGRAM:

Samples: 10' samples out from under surface casing.

Logging: CNL/LDT, W/NGT TD-Surf csg; with CNL/GR up to Surf; DLL/MS

FL TD-Surf csg: Long Spaced Sonic TD-SURF CSG

Coring: None

DST's: As warranted.

### 7. ABNORMAL CONDITIONS, BOTTOM HOLE PRESSURE, AND POTENTIAL HAZARDS:

Anticipated BHP:

From: 0 TO: 1100' Anticipated Max. BHP: 400 PSI From: 1100' TO: 6480' Anticipated Max. BHP: 2700 PSI

Abnormal Pressures Anticipated: None

Lost Circulation Zones Anticipated: None.

H2S Zones Anticipated: None Anticipated

Maximum Bottom Hole Temperature: 145 F

#### 8. ANTICIPATED STARTING DATE:

Plans are to drill this well as soon as possible after receiving approval. It should take approximately 25 days to drill the well with completion taking another 20 days.

# MULT. OINT SURFACE USE AND OPER TIONS PLAN YATES PETROLEUM CORPORATION

Zane "ABS" Federal Com. #4 660' FSL and 760' FEL

Section 15-T9S-R26E Chaves County, New Mexico

This plan is submitted with Form 3160-3, Application for Permit to Drill, covering the above described well. The purpose of this plan is to describe the location of the proposed well, the proposed construction activities and operations plan, the magnitude of the surface disturbance involved and the procedures to be followed in rehabilitating the surface after completion of the operations, so that a complete appraisal can be made of the environmental effect associated with the operations.

#### EXISTING ROADS:

Exhibit A is a portion of the BLM map showing the well and roads in the vicinity of the proposed location. The proposed well site is located approximately 15 miles northeast of Roswell, New Mexico and the access route to the location is indicated in red and green on Exhibit A.

#### **DIRECTIONS:**

Drive NE of Roswell on Highway 70 approx. 14 miles to Magdalena and turn right. Drive on Magdalena approx. 5.4 miles & turn left (east) on lease road. Stay right where road forks & drive approx. 0.4 of a mile to lease road on the right. Turn on lease road & drive approx. 600' where the access road is staked on the left (west) side going to the SW corner of the location.

#### PLANNED ACCESS ROAD:

- A. The proposed new access will be approximately 800' in length from the point of origin to the southwest corner of the drilling pad. The road will lie in a north to south direction.
- B. The new road will be 14 feet in width (driving surface) and will be adequately drained to control runoff and soil erosion.
- C. Existing roads will be maintained in the same or better condition.

#### 3. LOCATION OF EXISTING WELL:

- A. There is drilling activity within a one-mile radius of the well site.
- B. Exhibit D shows existing wells within a one-mile radius of the proposed well site.

#### 4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES:

- A. There are production facilities on this lease at the present time.
- B. In the event that the well is productive, the necessary production facilities will be installed on the drilling pad. If the well is productive oil, a gas or diesel self-contained unit will be used to provide the necessary power. No power will be required if the well is productive of gas.

#### 5. LOCATION AND TYPE OF WATER SUPPLY:

A. It is planned to drill the proposed well with a fresh water system. The water will be obtained from commercial sources and will be hauled to the location by truck over the existing and proposed roads shown in Exhibit A.

#### 6. SOURCE OF CONSTRUCTION MATERIALS:

Dirt contractor will locate nearest pit and obtain any permits and materials needed for construction.

#### METHODS OF HANDLING WASTE DISPOSAL:

- A. Drill cuttings will be disposed of in the reserve pits.
- B. Drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry.
- C. Water produced during operations will be collected in tanks until hauled to an approved disposal system, or separate disposal application will be submitted.
- D. Oil produced during operations will be stored in tanks until sold.
- E. Current laws and regulations pertaining to the disposal of human waste will be complied with.
- F. All trash, junk, and other waste materials will be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not approved.

#### 8. ANCILLARY FACILITIES: NONE

### 9. WELLSITE LAYOUT:

- A. Exhibit C shows the relative location and dimensions of the well pad, the reserve pits, the location of the drilling equipment, rig orientation and access road approach.
- B. The reserve pits will be plastic lined.
- C. A 400' x 400' area has been staked and flagged.

#### 10. PLANS FOR RESTORATION:

- A. After finishing drilling and/or completion operations, all equipment and other material not needed for further operations will be removed. The location will be cleaned of all trash and junk to leave the well site in as aesthetically pleasing a condition as possible.
- B. Unguarded pits, if any, containing fluids will be fenced until they have dried and been leveled.
- C. If the proposed well is non-productive, all rehabilitation and/or vegetation requirements of the Bureau of Land Management will be complied with and will be accomplished as expeditiously as possible. All pits will be filled level after they have evaporated and dried.

### 11. SURFACE OWNERSHIP: Meredith Ranch, c/o Wes Runyun Roswell, New Mexico

#### 12. OTHER INFORMATION:

- A. Topography: Refer to the existing archaeological report for a description of the topography, flora, fauna, soil characteristics, dwellings, historical and cultural sites.
- B. The primary surface use is for grazing.

#### 13. OPERATOR'S REPRESENTATIVE:


- A. Through A.P.D. Approval:
  Pat Perez, Permit Agent
  Yates Petroleum Corporation
  105 South Fourth Street
  Artesia, New Mexico 88210
  Phone (505) 748-1471
- B. Through Drilling, Completions & Prod. Pinson McWhorter, Operations Manager Yates Petroleum Corporation 105 South Fourth Street Artesia, New Mexico 88210 Phone (505) 748-1471

#### 14. CERTIFICATION:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions which presently exist; that the statements made in this plan are to the best of my knowledge, true and correct; and , that the work associated with the operations proposed herein will be performed by Yates Petroleum Corporation and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

3/12/2002


Regulatory Agent

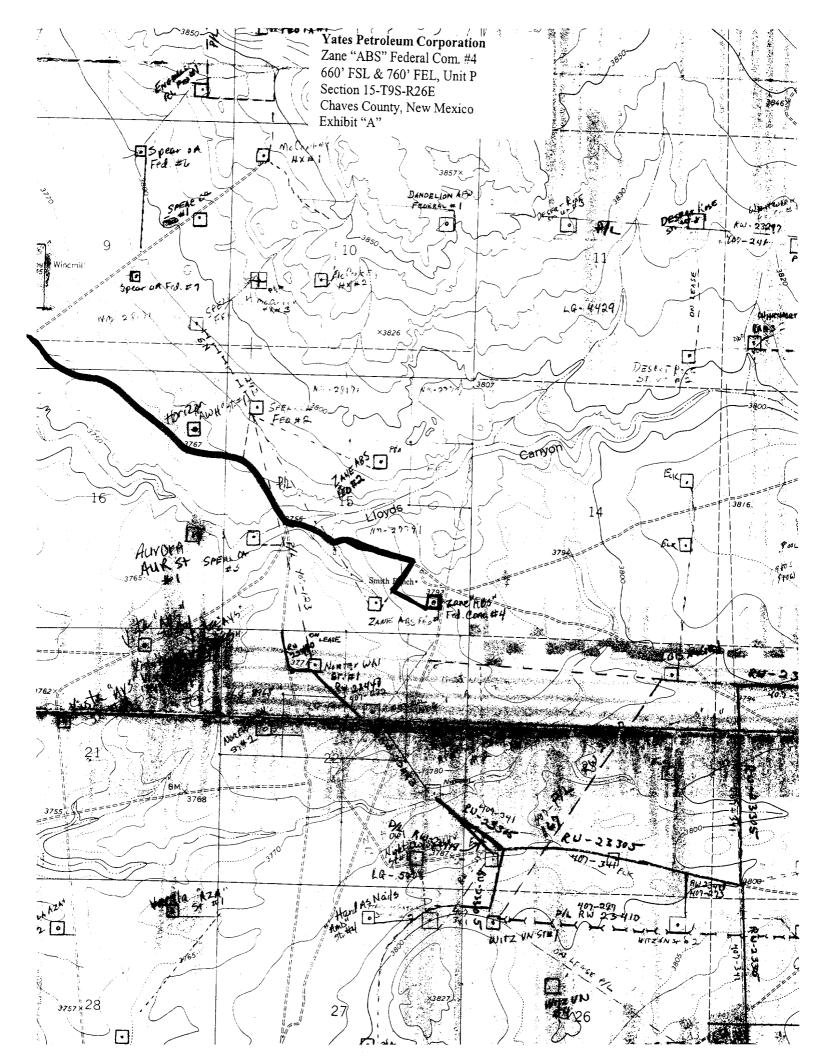




# Yates Petroleum Corporation


Typical 2,000 psi Pressure System Schematic Double Ram Preventer Stack

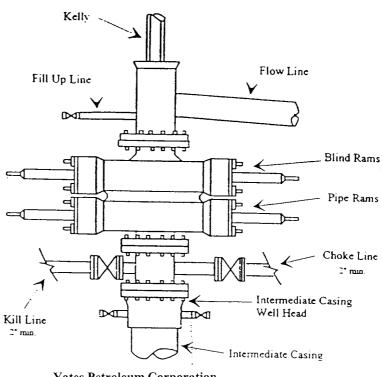

### Yates Petroleum Corporation Zane "ABS" Federal Com. #4 660' FSL & 760' FEL, Unit P Section 15-T9S-R26E Chaves County, New Mexico Exhibit "B"

Typical 2,000 psi choke manifold assembly with at least these minimun features

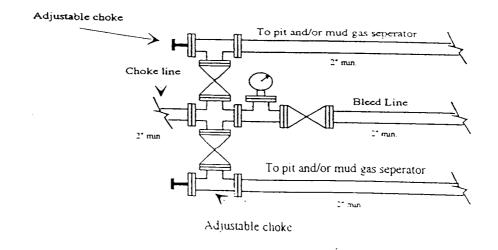

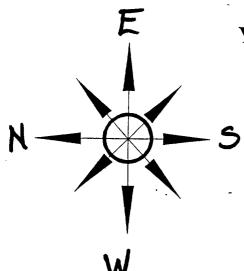

Yates Petroleum Corporation
Location Layout for Permian Basin

Up to 12,000'

Yates Petroleum Corporation

Zane "ABS" Federal Com. #4 660' FSL & 760' FEL, Unit P Section 15-T9S-R26E Chaves County, New Mexico Exhibit "C"

