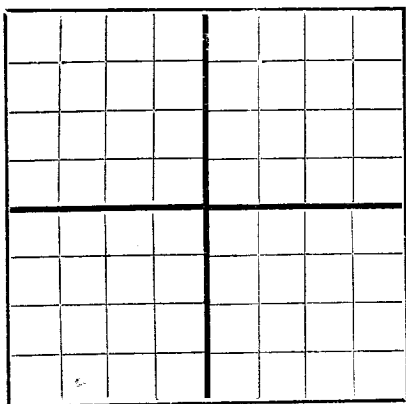
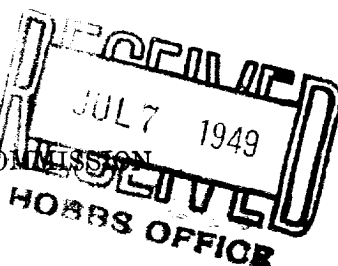


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Company or Operator W. Hawkins Address Box 514, Ft. Sumner, New Mexico
Lease Hawkins & Myrick Well No. SE 1/4 of Sec. 17, T. 2-N.
R. 25-E, N. M. P. M., Ricardo Structure Field, De Baca County.
Well is 660 feet north of the section line and 1980 feet east of the range line of Section 17, 2-N, R-25-E
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is N. E. Myrick Address Ricardo, N. Mexico
If Government land the permittee is _____ Address _____
The Lessee is W. H. Hawkins Address Box 514, Ft. Sumner, N.M.
Drilling commenced May 12, 1949 Drilling was completed June 29, 1949
Name of drilling contractor W. Hawkins Address Ft. Sumner, N. Mex.
Elevation above sea level at top of casing 4413 feet.
The information given is to be kept confidential until _____ 19____.

OIL SANDS OR ZONES

No. 1, from 1530' to 1535' No. 4, from _____ to _____
No. 2, from slight stain in line to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 240' to 260' feet. gravel
No. 2, from _____ to _____ feet. _____
No. 3, from 1620' to 1990' feet. sand
No. 4, from _____ to _____ feet. _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>10-3/4"</u>	<u>32</u>	<u>8</u>		<u>307</u>	<u>Texas</u>				
<u>8-5/8"</u>	<u>32</u>	<u>8</u>		<u>1370</u>	<u>Texas</u>				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>9-7/8"</u>	<u>8-5/8"</u>	<u>1370</u>	<u>25</u>	<u>Halliburton</u>	<u>9.6</u>	
<u>10-3/4"</u>	<u>15 1/2</u>	<u>307</u>	<u>150</u>	<u>Halliburton</u>	<u>9.9</u>	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 6174 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing _____, 19____.
The production of the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

R. L. Davis Driller W. A. Adams Driller
_____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 6th day of July, 1949
_____, Notary Public

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
• ft	240 ft		Red beds and sand shells
240	260		Water gravel
260	875		Red Beds and shale
875	1080		Sandy shale and shells
1080	1210		Anhydrite and sandy shale
1210	1530		sand and shale
1530	1535		slight stain in lime
1535	1620		sand and anhydrite
1620	2290		Sand
2290	2675		Sand, anhydrite and gyp
2675	3100		Sandy shale and shells and gyp
3100	4540		Anhydrite, gyp, shale and sand
4540	5730		Sandy shale
5730	5825		Lime and sand
5825	5934		Shale
5934	5947		Cherty lime
5947	6066		Sandy lime and shale
6066	6174	T.D.	Granite wash