

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Lease No. New Mexico 055570

RECEIVED

NOV 30 1959

U. S. GEOLOGICAL SURVEY
NEW MEXICO

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	X
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

November 27, 1959

Well No. 1 is located 1980 ft. from $\begin{Bmatrix} N \\ S \end{Bmatrix}$ line and 1980 ft. from $\begin{Bmatrix} E \\ W \end{Bmatrix}$ line of sec. 6NE/4, SW/4 Sec. 6 3N 2E MEM
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)

RECEIVED

Wildcat De Baca New Mexico
(Field) (County or Subdivision) (State or Territory)

JUL 31 1967

The elevation of the derrick floor above sea level is 4582 ft.

O. C. C.
ARTESIA, OFFICE

DETAILS OF WORK

(State names of and expected depths to objective sands; show size, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Spudded an 8 3/4" hole at 12:15 A.M. 11-27-59. Set 7" O.D., 17#/ft. surface casing at 242' & cemented w/75 ex. of neat Portland cement containing 3% calcium chloride. Cement circulated to the surface. Drilled a 6 1/2" hole to 1536' without discovering any commercial hydrocarbon deposits. Ran logs. Obtained authority to plug and abandon the well. Set cement plugs as follows:

12 sacks	1490' - 1530'
10 sacks	1350' - 1360'
10 sacks	750' - 760'
8 sacks	260' - 220'
4 sacks	20' - 0'

A 4" x 7' steel marker was placed in the top of the 7" surface casing with 3' imbedded in cement and 4' extending above ground level. The steel marker had welded thereon the operator's name and the well location. The location was cleaned and the rig moved.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company General Crude Oil Company

Address 107 Oil & Gas Building

Abilene, Texas


By J. A. Hunter

Title Area Production Superintendent

Form 9-330

R-24-E

U. S. LAND OFFICE Santa Fe, N. Mex.
SERIAL NUMBER New Mexico 055570
LEASE OR PERMIT TO PROSPECT

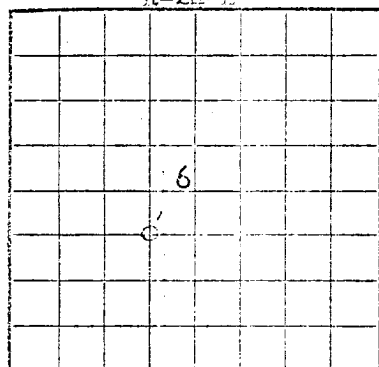

T-3-N

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

MAR 4 1960

U. S. GEOLOGICAL SURVEY
BOSTON, NEW MEXICO

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company General Crude Oil Company Address 107 Oil & Gas Building, Abilene, Texas

Lessor or Tract Federal Lease New Mex. 055570 Field Wilicat State New Mexico

Well No. 1 Sec. 6 T. 3N. R. 24E Meridian NPM County DeBaca

Location 1980 ft. [N] of S. Line and 1980 ft. [E] of E. Line of 6-3-24 Elevation 4582
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed

J. P. Hunter

Date March 2, 1960

Title Area Prod. Supt.

The summary on this page is for the condition of the well at above date.

Commenced drilling November 5, 1959 Finished drilling November 13, 1959

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

RECEIVED

No. 1, from None to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

ARTESIAN EFFLUENT

No. 1, from None to No. 3, from to

No. 2, from to No. 4, from to

CASH RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From-	To-	
7"	17	8 Rd.	Unknown	242	Guides	None	1536	1490	Surface Pipe

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
7"	242	75 sx. cmt plus 3% H. B. Pump & Plug	9.2#/Gal.	Cmt. Circ. to Surface	
	1490-1430	12 sacks	Expelled Col.	"	1536-1490 - 2 bbls. of mud
	1430-1300	10 sacks	"	"	1430-1350 - 3 bbls. of mud
	1300-700	10 sacks	"	"	1300-750 - 21 bbls. of mud
	700-225	8 sacks	"	"	700-225 - 10 bbls. of mud