

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY
NM OIL & GAS COMMISSION
(Other instructions on reverse side)
Artesia, NM 88210Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-20864

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

L. H. PIPKIN

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

WILDCAT

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec 26-T3S-R22E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

4287 GK

12. COUNTY OR PARISH

De Baca

13. STATE

NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

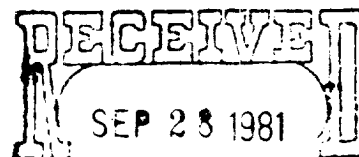
ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Rigged up well service unit, ran Cement Bond Log and CCL. Perforated 4 1/2" casing 3057-3086 with 11 shots. Acidized perforations with 1500 gals MSR 100-7 1/2% using ball sealers. Swabbed back load water. Treated perfs with 40,000 gals foam frac fluid and 70,000# of 20-40 sand. Rate is BPM. Treatment completed on 8-16-81

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

[Signature]

TITLE

Engineer

DATE

9-28-81

(This space for Federal or State office use)

APPROVED BY

SEP 30 1981

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side