

COMPANY Rault Petroleum		PROPERTY NAME Ridge State	WELL NO. 1
DATE	LOCATION (ULSTR)	FOOTAGE	
	G-24-1-20	1980 N / 1650'	
API NO.		POOL Wildcat	

- ① Displace hole w/ mud to 2550'
- ② Spot a 25 SX plug @ 2550'
- ③ Perforate @ 1150' RIH w/ tbg to 1160' & circulate cement to surface TAG leaving 100' across 8 5/8" shoe inside csg
- ④ Spot a 10 SX surface plug

⑤ Place mud between plugs

⑥ Clean & level location


* Contractor will need to check condition of road & location before submitting bid.

CASING RECORD

8 5/8" @ 1130'

4 1/2" @ 870' air over 50 Poz

Est TOC 1161'

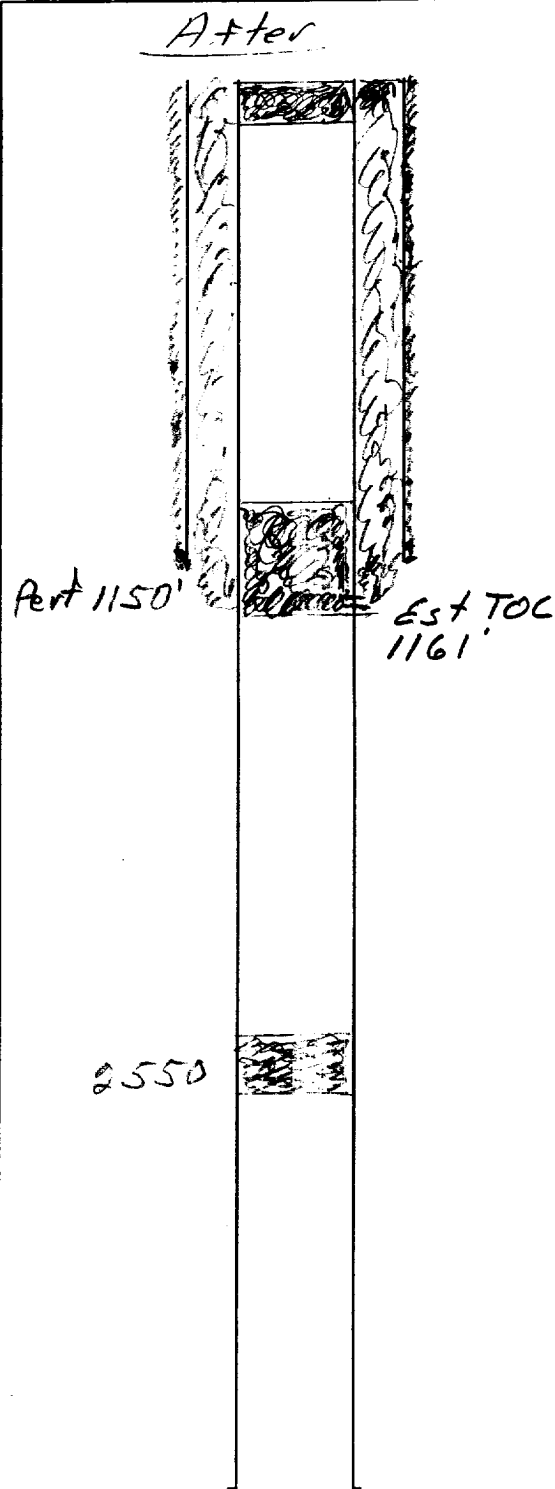

* 10 SX surface Plug.

* Perf. 4 1/2" csg @ 1150'. Circ. cement to surface leaving 100' cement across 8 5/8" csg shoe. TAG

* 25 SX cement Plug @ 2550'.