

Approved subject to the stipulation that any formations encountered in this well which carry potable water will be isolated by either the surface casing or oil string and sufficient volumes of cement.

Form 9-331a (Feb. 1961) WILLIAM H. FRIMMELER, Roswell Dist. Engineer

Budget Bureau No. 42-R358.4
Approval expires 12-31-60.

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office _____
Lease No. **NM 028951-A**
Unit _____

X			

SUNDRY NOTICES AND REPORTS ON WELLS

RECEIVED

1962

NOTICE OF INTENTION TO DRILL	X	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

November 2, 1962

Well No. 1 is located 660 ft. from N line and 660 ft. from W line of sec. 24

NW/4 NW/4 24
(1/4 Sec. and Sec. No.)

1 N
(Twp.)

27 E
(Range)

(Meridian)

Undesignated
(Field)

De Baca
(County or Subdivision)

New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is 4300 ft. Est.

DETAILS OF WORK

State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudlogging jobs, cementing points, and all other important proposed work)

This well will be drilled to sufficient depth to test the Glorieta formation (approximately 2750 feet). We will set sufficient surface pipe to protect surface water (approximately 110 feet 8 5/8" 36 lbs. pipe) and mud in same.

Should it be necessary to set oil string, we will set 5 1/2" 14 lbs. pipe and properly cement same.

RECEIVED
NOV 05 1962

U. S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company J. F. McAdams

Address P. O. Box 1716

Hobbs, New Mexico

By J. F. McAdams

Title Owner

NEW MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE DEDICATION PLAT

FORM C-128
Revised 5/1/57

SEE INSTRUCTIONS FOR COMPLETING THIS FORM ON THE REVERSE SIDE


SECTION A

Operator J. F. MCADAMS		Lease FEDERAL		Well No. 1
Unit Letter D	Section 24	Township 1 NORTH	Range 27 EAST	County DEBACA
Actual Footage Location of Well: 660 feet from the NORTH line and 660 feet from the WEST line				
Ground Level Elev.	Producing Formation	Pool <i>Wildcat</i>	Dedicated Acreage: Acres	

1. Is the Operator the only owner in the dedicated acreage outlined on the plat below? YES _____ NO _____. ("Owner" means the person who has the right to drill into and to produce from any pool and to appropriate the production either for himself or for himself and another. (65-3-29 (e) NMSA 1935 Comp.)
2. If the answer to question one is "no," have the interests of all the owners been consolidated by communitization agreement or otherwise? YES _____ NO _____. If answer is "yes," Type of Consolidation _____
3. If the answer to question two is "no," list all the owners and their respective interests below:

Owner	Land Description

SECTION B

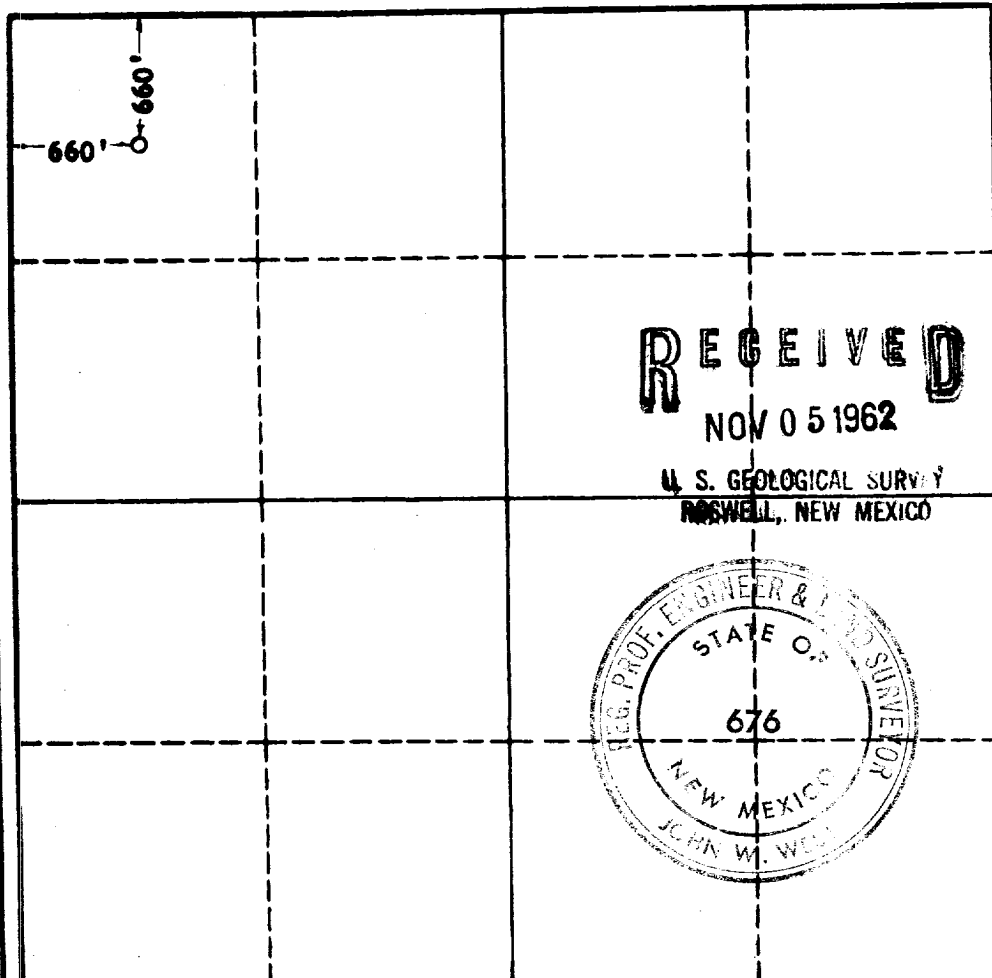

CERTIFICATION

I hereby certify that the information in SECTION A above is true and complete to the best of my knowledge and belief.

J. F. McAdams
Name

Position

Company

Address

I hereby certify that the well location shown on the plat in SECTION B was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed
11-1-1962

Registered Professional Engineer
and/or Land Surveyor, **JOHN W. WEST**

John W. West
Certificate No.

N.M. - P.E. & L.S. NO. 676

0 330 660 990 1320 1650 1980 2310 2640 2970 3300 3630 3960 4290 4620 4950 5280 5610 5940 6270 6600