


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

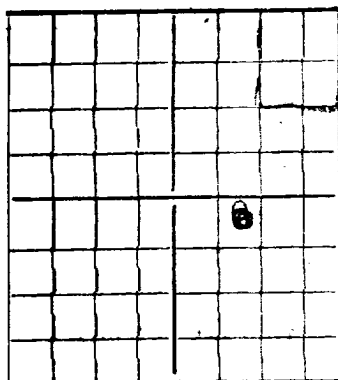

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Harry W. Long
Company or Operator

Box 1044 Lordsburg N. Mex.
Address

Well No. 1 NW 1/4 of SE 4 of Sec. 14, T. 22S

Lease
R. 20W, N. M. P. M., Lordsburg Field, Hidalgo County.
Well is 330 feet south of the North line and 660 feet west of the East line of the above 40-Acres.

If State land the oil and gas lease is No. B-7580 Assignment No. B-7580-2

If patented land the owner is _____, Address _____

If Government land the permittee is _____, Address _____

The Lessee is made by the State of New Mexico, Address Santa Fe

Drilling commenced Oct. 21st, 1941 Drilling was completed not yet 19

Name of drilling contractor my self, Address Box 1044 Lordsburg N. Mex.

Elevation above sea level at top of casing 4250 feet.

The information given is to be kept confidential until _____ 19

OIL SANDS OR ZONES

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 188 ft. to 200 feet. 188 ft.
No. 2, from 458 ft. to 550 feet. 188 ft.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7" OD	28 lbs.	11		780 ft.	Baker				
5.3/16	20	11		1074 ft.	Baker				

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from beginning feet to date feet, and from feet to feet

PRODUCTION

Put to producing , 19 Well not yet finished

The production of the first 24 hours was barrels of fluid of which % was oil; %
emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

James L. Scoggin , Driller , Driller
..... , Driller , Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

day of Oct. 20th. , 19 43

[Signature]
U. S. COMMISSIONER Notary Public.

My Commission expires July 16, 1946

Lordsburg N. Mex. Oct. 19th. 43.

Place

Date

Name Wayne W. Long

Position OWNER

Representing

Company or Operator

Address Box 1044 Lordsburg N. Mex.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
1	20	20	Sand and Brown mud
20	40	20	" " " "
40	60	20	" " " "
60	80	20	Sand and Brown Shale
80	100	20	Gravel, Sand, Clay, showing little Water
100	120	20	Sand and Brown Shale
120	140	20	Sand and Brown Shale, Struck Water
140	160	20	Water, Gravel, Gray Clay.
160	180	20	Gravel and Blue Shale
180	200	20	Blue Shale
200	220	20	Brown Shale
220	240	20	Blue Shale
240	260	20	Blue Shale
260	280	20	Brown Shale
280	300	20	Brown and Gray Shale
300	320	20	Brown Shale
320	340	20	Shale and Fine Hard Sand
340	360	20	Hard Sand, little Oil
360	380	20	Hard Sand little Oil
380	400	20	Conglomerate, Sand, Gravel, Oil
400	420	20	Gray Shale
420	440	20	Red Shale, showing of Oil
440	460	20	Sand and Shale
460	480	20	Shale and Gravel
480	500	20	Sand and Shale
500	520	20	Sand and Gravel
520	540	20	Red Shale
540	560	20	Shale and Gravel
560	580	20	Lime and Gravel
580	600	20	Hard Gray Shale present bottom.