

UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
SUNDY NOTICES AND REPORTS ON WELLS

Form approved.  
Budget Bureau No. 1004-0135  
Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL NO.

NM 37148

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Yardstick "AAV" Federal

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Wildcat - A. J. Ho

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Unit G, Sec. 27-T4S-R19E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

4807' GR

12. COUNTY OR PARISH

Lincoln

13. STATE

NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON\*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL


ALTERING CASING

ABANDONMENT\*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Spudded 17-1/2" hole 1:15 PM 1-5-85. Lost returns 290'. Drilling with no returns. Ran 11 joints 13-3/8" 54.5# J-55 ST&C casing set 462'. 1-Type M notched guide shoe set 462'. Insert float set 420'. Cemented w/300 sx Pacesetter Lite, 15#/sx Hiseal, 1#/sx celloseal, 2#/sx Permacheck and 3% CaCl2. Tailed in w/150 sx Class C 2% CaCl2. Compressive strength of cement - 1250 psi in 12 hrs. PD 8:30 PM 1-6-85. Bumped plug to 800 psi, released pressure and float held okay. Cement did not circulate. WOC 8 hrs. Ran Temperature Survey, found top of cement 300'. Ran 1". Tagged cement 285'. Spotted 100 sx Class C 4% CaCl2. PD 6:30 AM 1-7-85. WOC 1 hr. Ran 1". Tagged cement 165'. Spotted 125 sx C1 C 4% CaCl2. PD 8:15 AM 1-7-85. Cement circulated 5 sacks. WOC. Drilled out 9:00 PM 1-7-85. WOC 24 hrs and 30 minutes. NU and tested to 1500 psi for 30 minutes, OK. Reduced hole to 12-1/4". Drilled plug and resumed drilling.

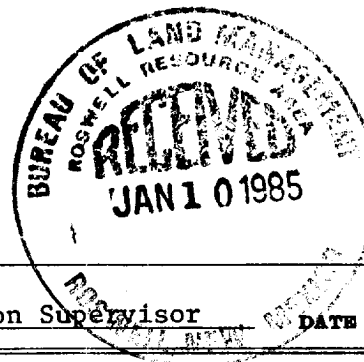

18. I hereby certify that the foregoing is true and correct

SIGNED Peter W. Chester

TITLE Production Supervisor

DATE 1-8-85

(This space for Federal or State office use)  
ACCEPTED FOR RECORD

APPROVED BY PETER W. CHESTER  
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

JAN 15 1985

\*See Instructions on Reverse Side