

~~Confidential~~

UNITED STATES
DEPARTMENT OF THE INTERIOR

SUBM.
(Other
verse)

Oil Conservation Commission

Revised
Bureau No. 1004-0135
August 31, 1985
ACTION AND SERIAL NO.

BUREAU OF LAND MANAGEMENT

CONFIDENTIAL INFORMATION

Artesia, NM 88210
Artesia, NM 88210

NM-38313

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER

RECEIVED

2. NAME OF OPERATOR

AUG 02 1991

Cibola Energy Corporation

3. ADDRESS OF OPERATOR

O. C. D.
ARTESIA, OFFICE

P.O. Box 1688 Albuquerque, NM 87103

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface

1063 FSL, 823 FEL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)
5611.8 GR

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Ysletano Canyon Fed.

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Wildcat

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 7 T14S R11E

12. COUNTY OR PARISH 13. STATE

Otero

NM

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREATMENT

ALTERING CASING

SHOOTING OR ACIDIZING

ABANDONMENT*

(Other) Run and Cement Casing

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

10/27/89 Ran 4500' of 5 1/2" casing with guide shoe, float collar one joint off bottom, 12 centralizers. Circulated mud for one hour prior to cementing. Pumped 100 sx of Pozzolan preflush mixed at 11 ppg. Cemented with 300 sx of Class C cement with 10% salt, .5% FLA, 0.2% Retarder and 1/4 #/sk cellophane flakes.

10/28/89 SI well, Rig down and move rig off location.

18. I hereby certify that the foregoing is true and correct

SIGNED

Peter W. Chester

TITLE

Engineer

DATE


1/09/90

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

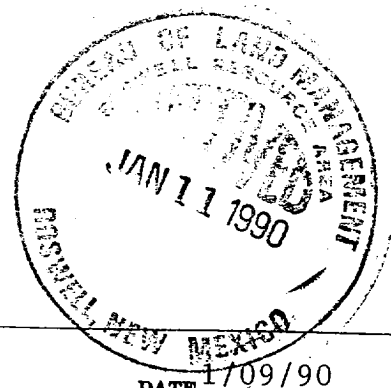

ACCEPTED FOR RECORD
PETER W. CHESTER

DATE

JAN 18 1990

BUREAU OF LAND MANAGEMENT
ROSWELL RESOURCE AREA

*See Instructions on Reverse Side