


Closed Loop Mud Drilling System

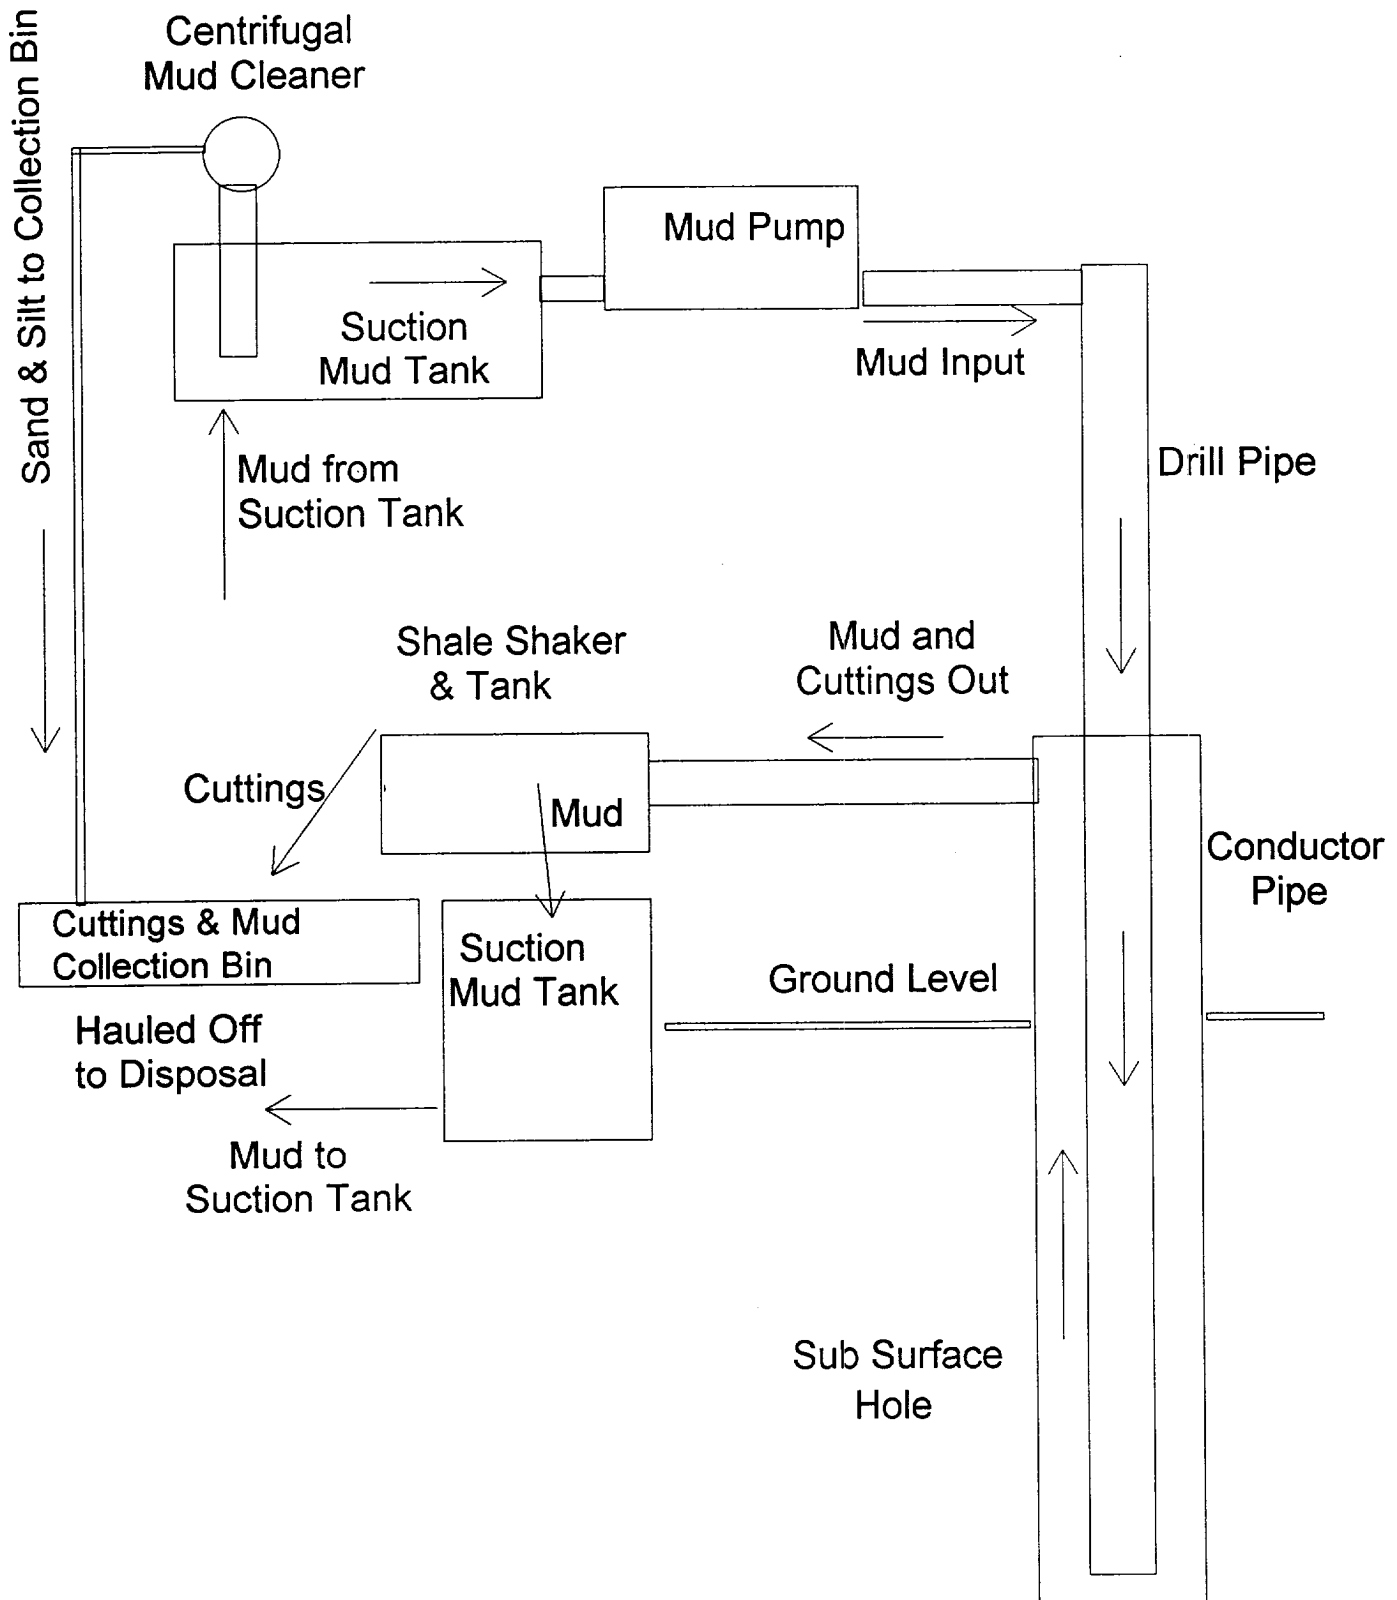

ATTACHMENT "2"

MODIFY EXHIBIT "A", DRILLING PROGRAM, OF THE ORIGINAL APD AS FOLLOWS:

III. Estimated depths at which water, oil, gas or other mineral-bearing formations are expected to be encountered:

<u>SUBSTANCE</u>	<u>DEPTH</u>
Fresh water	700'
Oil	Abo below 3100'
Gas	None Anticipated

IV. A. Proposed Casing Program:

<u>HOLE SIZE</u>	<u>CASING SIZE</u>	<u>GRADE</u>	<u>WEIGHT/FOOT</u>	<u>DEPTH</u>
17.5"	13 3/8"	New 8RD X-42	54.5#	40'
12.25"	9 5/8"	New 8RD LT&C J-55	32.0#	1,600'
7 7/8"	5 1/2"	New 8RD LT&C J-55	15.5#	5,500'

IV. B. Proposed Cement Program

13 3/8" Casing 54.5#/ft Set @ 40'

Cement w/ 100 sks Class "C" (100% excess). Circulate to surface.

9 5/8" Casing 32.0#/ft Set @ 1,600'

Cement w/ 250 sks (50:50) POZMIX (Base Class C) (25% Excess). Fill from 1,000' to 0'
PLUS

Cement w/ 200 sks Class "C" (25% excess). Fill from 1,600' to 1,000'

5 1/2" Casing 15.5#/ft Set @ 5500'

Cement w/ 200 sks (50:50) POZMIX (Base Class C) (25% Excess). Fill from 4,400' to 3,000'
PLUS

Cement w/ 200 sks Class "C" (25% excess). Fill from 5,500' to 4,400'