


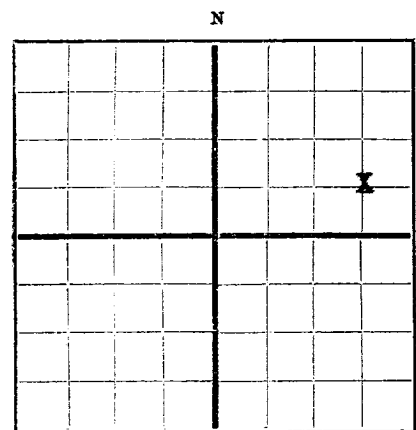

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Sun Oil Company
Company or Operator
P. O. Box 2792, Odessa, Texas
Address
Victorio Land & Cattle Co. No. 2 in NW/4 of Sec. 27 T. 10 S
Lease
R. 1 W, N. M. P. M., Wildcat Field, Sierra County.
Well is 1980 feet south of the North line and 660 feet west of the East line of Section 27
If State land the oil and gas lease is No. - Assignment No. -
If patented land the owner is - Address -
If Government land the permittee is - Address -
The Lessee is Sun Oil Company Address P.O. Box 2880, Dallas, Texas
Drilling commenced 2-3 19 52 Drilling was completed 5-4 19 52
Name of drilling contractor Gardner Bros. Address Dallas, Texas
Elevation above sea level at top of casing 4770 feet.
The information given is to be kept confidential until - 19 -

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13 3/8"	48#	8-R	Nat'l	156.05	Guide	-	-	-	-

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2	13 3/8	156.04	150	Halliburton	-	-

PLUGS AND ADAPTERS

Heaving plug—Material Cement Length 100' Depth Set 223'-123'
Cement 20' 20'-0'
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
None						

Results of shooting or chemical treatment. -

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 6352 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing, 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Z. B. Smith, Driller F. W. Moore, Driller
J. K. Langford, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 13th day of May, 19 52
Notary Public
Odessa, Texas
Place
Name O. S. Allbaugh
Position Superintendent
Representing Sun Oil Company
5-13-52
Date

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	175'		Sand & Caliche
175	364		Sand
364	870		Shale and Sand
870	1045		Shale
1045	1306		Shale and Sand
1306	1383		Sand
1383	1396		Limestone
1396	1520		Sand
1520	2435		Lime
2435	2503		Anhydrite and Dolomite
2503	2559		Sand and Lime
2559	2588		Anhydrite and Sand
2588	2750		Lime
2750	2865		Sand and Anhydrite
2865	2910		Lime
2910	2935		Sand
2935	3075		sand and Dolomite
3075	3092		Anhydrite
3092	3125		Sand
3125	3148		Lime
3148	3250		Sand and Dolomite
3250	3292		Lime
3292	3326		Anhydrite and Lime
3326	4251		Sand
4251	4274		Sand and Shale
4274	4289		Sand and Lime
4289	4339		Sand
4339	4786		Lime
4786	4804		Shale
4804	4907		Lime and Shale
4907	5483		Lime
5483	5490		Chert and Lime
5490	5548		Lime
5548	5552		Shale, Lime and Chert
5552	5757		Lime and Shale
5757	5804		Shale
5804	5948		Shale and Lime
5948	5979		Lime
5979	5998		Shale and Lime
5998	6012		Shale and Sand
6012	6048		Sand
6048	6086		Sand and Dolomite
6086	6095		Dolomite
6095	6102		Lime and Calcite
6102	6139		Quartzite
6139	6200		Dolomite and Lime
6331	6349		Lime and Sand
6349	6352		Granite

6200 - 6331 → 5dy. ls. grading to sil. & dol. ls.