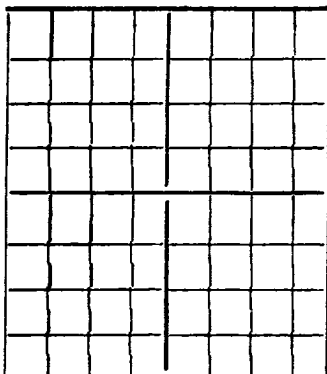


N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

PHILLIPS &amp; RAMSAY

Box 638, Artesia, New Mexico

Company or Operator

Address

State

Well No. 3

in

SW/4 NE/4 of Sec. 9

T. 17

Lease

R. 28, N. M. P. M., Red Lake Field, Eddy County.

Well is 1650 feet south of the North line and 1650 feet west of the East line of Sec. 9-17-28.

If State land the oil and gas lease is No. B-2179 Assignment No. 2 &amp; 4.

If patented land the owner is, Address

If Government land the permittee is, Address

The Lessee is Phillips &amp; Ramsay, Address Box 638, Artesia, New Mexico

Drilling commenced March 1 19 44 Drilling was completed April 14 19 44.

Name of drilling contractor, Address

Elevation above sea level at top of casing 3,521 feet.

The information given is to be kept confidential until May 15th 19 44.

## OIL SANDS OR ZONES

No. 1, from 1,780 to 1,798 - Gas No. 4, from to

No. 2, from 2,277 to 2,310 - Oil Show, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Solidified	120			

Results of shooting or chemical treatment no results.

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from top feet to bottom feet, and from feet to feet

## PRODUCTION

Put to producing No production, 19.

The production of the first 24 hours was None barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

T. B. Hammond, Driller, Driller

Jim Hammond, Driller, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Artesia, New Mexico Box 638 6/6/44

Subscribed and sworn to before me this 6th

day of June, 1944

W. B. Byers

Notary Public.

Name PHILLIPS &amp; RAMSAY

By Gordon Phillips Operator

Representing PHILLIPS &amp; RAMSAY

Company or Operator

New Mexico

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	34	34	Red Beds
34	57	23	Grey Lime
57	175	118	Red Beds
175	181	6	Anhy
181	320	139	Anhy & Shl
320	335	15	Lime
335	385	50	Anhy
385	394	9	Sand - Water
394	632	238	Anhy & Br Shl 6
632	654	22	Lm brown - bailed/bbls nat. good gas
654	676	22	Lm & Anhy
676	789	113	Lm & brown shale
789	820	31	Lime
820	920	100	Lm & brown shale
920	1107	187	Lm & Anhy
1107	1117	10	Anhy & brown shale
1117	1131	14	Red sand - water
1131	1180	49	Lime & Anhy
1180	1192	12	Brown Shale
1192	1278	86	Lime - Grey
1278	1342	64	Lime & Anhy
1342	1376	34	Gas Sand - 1,800,000
1376	1392	16	Anhy
1392	1406	14	OIL SAND
1406	1571	165	Anhy
1571	1692	121	Lime Grey
1692	1705	13	GAS SAND
1705	1748	43	Lime
1748	1794	46	Anhy & Sand - show of gas
1794	1830	36	Lime
1830	1857	27	Lime - White
1857	1913	56	Lime Grey
1913	1960	47	Lime White
1960	2204	244	Lime Grey
2204	2214	10	Lime Brown
2214	2265	51	Lime Grey
2265	2305	40	Lime Grey - showing oil
2305	2540	235	Lime Grey
2540	2552	12	Lime Brown
2552	2819	267	Lime Grey
2819	2832	13	Lime brown sdy
2832	2881	49	Lime Grey
2881	2891	10	Lime Black
2891	3007	116	Lime Grey
3007	3040	33	Lime White TD