


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

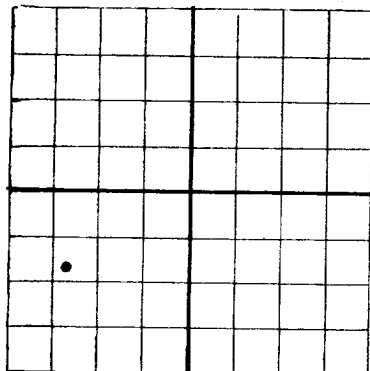

AREA 640 ACRES
LOCATE WELL CORRECTLY

Red Lake Oil Company

Artesia, New Mexico

Company or Operator

Address

State

Well No.

10

in NW SW

of Sec.

21

T. 17

Lease

R. 28

N. M. P. M.,

Red Lake

Field,

Rddy

County.

Well is 3830 feet south of the North line and 4390 feet west of the East line of Sec. 21

If State land the oil and gas lease is No. B-1969

Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced January 7

19 45

Drilling was completed

March 5

19 45

Name of drilling contractor Self

Address

Elevation above sea level at top of casing 3617 feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from 1927

to

1965

No. 4, from

to

No. 2, from 2014

to

2025

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 1927 355

to

1965 360

feet.

No. 2, from 450

to

455

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8"	24			470	Tex.				Water
6 5/8"	18			1736	Tex.				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHICH SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10	8 1/2	470	50	Haliburton		
8	6 5/8	1736	50	Haliburton		

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
4 1/2		Nitro Glys.	100	2/28/45	1965	2048
4 1/2		Nitro Glys.	40	2/24/45	2025	2048

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 2048 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing March 15 19 45

The production of the first 24 hours was 100 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

March K.R. Swanbert

Driller

Driller

T. B. Hammond

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 23

day of March 19 45

Juanita Denton
Notary Public

My Commission expires

My Commission Expires August 28, 1945

Artesia, New Mex. Date March 22, 1945

Name J C Williams

Position Agent

Representing Red Lake Oil Company

Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	10	10	Dirt
10	45	35	Gyp
45	250	205	Red Bed
250	355	5	Anhydrite
355	360	5	Sater
360	470	110	Anhydrite
470	525	55	Red Bed
525	1220	695	Anhydrite
1220	1250	30	Red Sand
1250	1660	410	Anhydrite
1660	1685	25	Lime
1685	1700	15	break
1700	1927	227	Lime
1927	1965	38	Sandy Lime
1965	1974	9	Broken Lime
1974	1987	13	Gray Lime
1987	2014	27	Lime ; Top Reef
2014	2025	11	Sand
2025	2048	23	Lime