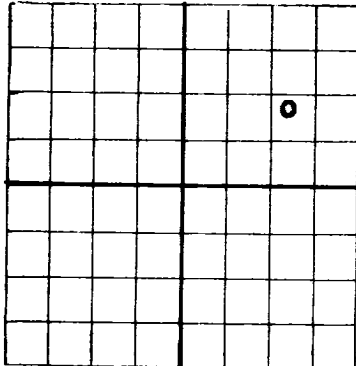


N

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

**McNUTT & PLOYHAR****Artesia, New Mexico**

Company or Operator

Address

State

Well No. 1

in SE 1/4 NE 1/4

of Sec. 30

T. 17S

Lease

R. 28E

N. M. P. M.

Red Lakes

Field,

Eddy

County.

Well is 1650 feet south of the north line and 990 feet west of the East line of Section 30;

If State land the oil and gas lease is No. B-8814 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is McNutt Oil &amp; Refining Co. Address El Paso, Texas

Drilling commenced May 12 1941 Drilling was completed May 20 1941

Name of drilling contractor W. D. Cunningham Address Artesia, N. M.

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 543 to 550 No. 4, from to

No. 2, from 557 to 565 No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 275 to 285 feet.

No. 2, from 295 to 300 feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-1/4	28#	10	Used	377	Reg.				
7"	17#	10	"	540	"				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8-1/4	377		Halliburton		Landed - 40 sz mud
8"	7	540	25	West-Texas Cmtg		

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	1000 gal	8-20-41	543-65	

Results of shooting or chemical treatment

None

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from TD feet to feet, and from feet to feet

## PRODUCTION

Put to producing 19

The production of the first 24 hours was (None) barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

T. R. White, Driller Leo Allman, Driller

H. H. MacArthur, Driller A. D. Cunningham, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 15th

Artesia, New Mexico 9-15-41

day of September 1941

Name Earl Ployhar

Position Partner

Representing McNutt &amp; Ployhar

Notary Public

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	40		Red Sand
40	75		Red Rock
75	105		Gray Rock
105	115		Gray Rock
115	140		Red Rock
140	235		Anhydrite
235	275		Red Rock
275	285		Water Sand
285	295		Anhydrite
295	300		Water Sand
300	315		Anhydrite
315	325		Red Rock
325	335		Anhydrite
335	350		Red Rock
350	365		Anhydrite
365	377		Red Rock & Anhydrite
377	400		Red Rock & Anhydrite
400	460		Anhydrite
460	540		Anhydrite & Lime Shells
540	543		Lime
543	550		Sandy Lime - OIL SHOW
550	557		Anhydrite
557	565		Sandy Lime - OIL SHOW
565	578		Anhydrite
	T.D.		