

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE

FORM APPROVED

C/ST

(See other ...
structions on
reverse side)

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

1a. TYPE OF WELL: OIL WELL ☒ GAS WELL ☐ DRY ☐ Other ☐
b. TYPE OF COMPLETION: NEW WELL ☒ WORK OVER ☐ DEEP-EN ☐ PLUG BACK ☐ DIFF. RESVR ☐

2. NAME OF OPERATOR

DEVON ENERGY CORPORATION (NEVADA)

3. ADDRESS AND TELEPHONE NO.

20 N. BROADWAY, SUITE 1500, OKC, OK 73102-8260 (405) 235-3611

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*

At surface 230' FSL & 2140' FWL; Unit "N"

At top prod. interval reported below (SAME)

At total depth (SAME)

ACCEPTED FOR RECORD

AUG 10 1997

14. PERMIT NO.

DATE ISSUED
5/6/9712. COUNTY OR PARISH
Eddy County13. STATE
NM15. DATE SPUDDED
7/2/9716. DATE T.D. REACHED
7/6/9717. DATE COMPL. (Ready to prod.)
7/18/9718. ELEVATIONS (DF, RKB, RT, GR, ETC.)*
KB 3549'; GL 3540'; DF 3548'

19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD
2499'21. PLUG, BACK T.D., MD & TVD
2449'22. IF MULTIPLE COMPL., HOW MANY?
NA23. INTERVALS
DRILLED BY
→ROTARY TOOLS
X

CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)*
San Andres - 1511-2210'25. WAS DIRECTIONAL SURVEY
MADE
No26. TYPE ELECTRIC AND OTHER LOGS RUN
LDT/CNL/DLL/MSFL/GR; CBL27. WAS WELL CORED
No

28. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8" J-55	24#	1075'	12-1/4"	surf; 100 sxs lite & 300 sxs "C"	NA
5-1/2" J-55	15.5#	2499'	7-7/8"	surf; 225 sxs lite C & 250 sxs "C"	NA

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	1969'	(OET)

31. PERFORATION RECORD (Interval, size and number)

1511'-1528' USAN ANDRES (2-40" EHD holes)
1784'-1874' ALPHA (5-40" EHD holes)
1939'-1976' "A" (5-40" EHD holes)
2022'-2102' "B" (9-40" EHD holes)
2118'-2152' "C" (4-40" EHD holes)
2168'-2210' "D" (5-40" EHD holes)

32. ACID SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
1511-2210'	2500 gals of 15% NeFe acid
1511-2210'	180,000 gals linear gel water + 6000# 100 mesh sand + 86,000# 20/40 and 157,000# 16/30 Brady sand.

33.* PRODUCTION

DATE FIRST PRODUCTION 7/22/97		PRODUCTIONS METHOD I(Flowing, gas lift, pumping—size and type of pump) Pumping (2-1/2" x 2" x 12' RWTC Pump)					WELL STATUS (Producing or shut-in) Producing	
DATE OF TEST 8/2/97	HOURS TESTED 24	CHOKO SIZE	PROD'N FOR TEST PERIOD —————→	OIL-BBL. 99	GAS-MCF. 99	WATER-BBL. 266	GAS-OIL RATIO 1000/1	
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE —————→	OIL-BBL. 99	GAS-MCF. 99	WATER-BBL. 266	OIL GRAVITY-API (CORR.) 38 "		

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)

Vented (To be connected)

TEST WITNESSED BY

Danny Hokett

35. LIST OF ATTACHMENTS

Logs, Deviation Surveys

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED Cristal ThorntonTITLE ENGINEERING TECHNICIANDATE August 7, 1997

*(See Instructions and Spaces for Additional Data on Reverse Side)

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):				38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	TOP	
					MEAS. DEPTH	TRUE VERT. DEPTH
Premier Sand	1416'	1452'	sandstone dolomite	Bowers	638'	+2902
San Andres	1452'	2499'		Queen	810'	+2730
				Grayburg	1183'	+2357
				Premier	1416'	+2124
				San Andres	1452	+2088
		DEPTH	ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.. (continued from the front)			
		NA				

L & M DRILLING, INC.

OIL WELL DRILLING CONTRACTORS
PO BOX 1370 ARTESIA, NEW MEXICO 88211-1370
(505) 746-4405 746-3518 748-2205

July 14, 1997


Devon Energy Corporation
20 North Broadway, Suite 1500
Oklahoma City, OK 73102-8260

RE: Eagle 33N Federal #10
230' FSL & 2140' FWL
Sec. 33, T17S, R27E
Eddy County, New Mexico

Gentlemen:

The following is a Deviation Survey for the above captioned well.

DEPTH	DEVIATION
176'	1/4°
358'	1/2°
498'	1/2°
643'	3/4°
793'	1 1/2°
981'	2°
1050'	2°
1457'	1°
1956'	1°
2422'	1°
2478'	1°
2500'	1°

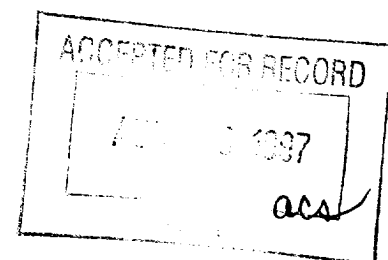

Very truly yours,

Eddie C. LaRue
Vice President

STATE OF NEW MEXICO
COUNTY OF EDDY

The foregoing was acknowledged before me
this 14th day of July, 1997.

Notary Public