

Submit 3 copies  
to Appropriate  
District Office

State of New Mexico  
Energy, Minerals and Natural Resources Department

Form C-103  
Revised 1-1-89

DISTRICT I  
P.O. Box 1980, Hobbs, NM 88240  
DISTRICT II  
P.O. Drawer DD, Artesia, NM 88210  
DISTRICT III  
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION  
P.O. Box 2088  
Santa Fe, New Mexico 87504 -2088


WELL API NO. 30-015-30560
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. B-8617
7. Lease Name or Unit Agreement Name Spurck 15 State Com
8. Well No. 1
9. Pool name or Wildcat Empire, Penn

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A  
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"  
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: OIL Well <input type="checkbox"/> GAS Well <input checked="" type="checkbox"/> OTHER	2. Name of Operator Yates Drilling Company
3. Address of Operator 105 South 4th Street, Artesia, NM 88210	4. Well Location Unit Letter D : 660 Feet From The North Line and 660 Feet From The West Line Section 15 Township 17S Range 28E NMPM Eddy County

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> OTHER: <input type="checkbox"/>	SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> COMMENCE DRILLING OPNS. <input checked="" type="checkbox"/> CASING TEST AND CEMENT JOB <input checked="" type="checkbox"/> OTHER: <input type="checkbox"/>

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.  
Spudded a 26" hole with rat hole machine at 10:30 am, 3-4-00. Set 40' of 20" conductor pipe. (Note: Notified Betty Rollins with NMOC, Artesia of spud).  
Resumed drilling a 14 3/4" hole with rotary tools at 2:30 pm, 3-9-00.  
TD 400' at 5:30 pm, 3-10-00. Ran 9 jts. 11 3/4", 42# H-40 casing set at 400'. Texas Pattern Notched guide shoe set at 400'. Insert float set at 358.15'.  
Cemented with 100 sxs. H + 10% A-10B + 1% CaCl + 25# Cello + 10# Gilsonite (yld 1.52, wt 14.6). Tailed in with 350 sxs. Class C + 2% CaCl (yld 1.34, wt 14.8). Plugged down 12:00 am 3-11-00. Bumped plug to 500 psi, float held OK. Circulated 75 sxs. WOC 23 hrs.  
Reduced hole to 11" and resumed drilling at 6:00 pm, 3-11-00.

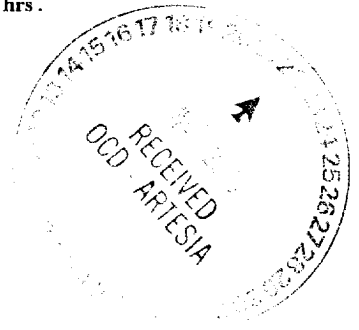

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE <i>Karen J. Leishman</i>	TITLE Engineering Technician	DATE 3-20-00
TYPE OR PRINT NAME Karen J. Leishman	TELEPHONE NO. 505-748-4500	

(This space for State Use)

APPROVED BY <i>Jim W. Lewis</i>	TITLE District Supervisor	DATE MAR 24 2000
---------------------------------	---------------------------	------------------

CONDITIONS OF APPROVAL, IF ANY: