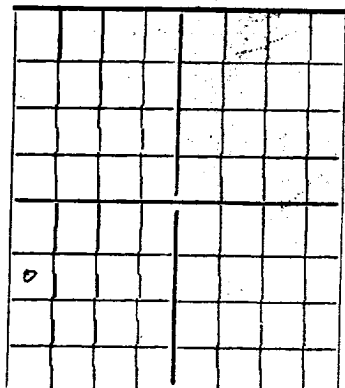


N:

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Danciger Oil & Refining Company **W. T. Waggoner Building, Fort Worth, Texas**
Company or Operator Address
Mancil E. Turner Well No. **26-B** in **SW/4W/3W** of Sec. **20**, T. **17S**
Lease
R. **31E**, N. M. P. M., **Free** Field, **Edley** County.
Well is **1650** feet **north** of the **South** line and **330** feet **east** of the **East** line of **Section 20**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is **Mancil E. Turner** Address **Artesia, New Mexico**
The Lessee is **Danciger Oil & Refining Company** Address **Fort Worth, Texas**
Drilling commenced **October 15** 19 **47** Drilling was completed **December 6** 19 **47**
Name of drilling contractor **Kersey & Company** Address **Artesia, New Mexico**
Elevation above sea level at top of casing **3615** feet. **G.L.**
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from **1937** to **1940** No. 4, from to
No. 2, from **1965** to **1969** No. 5, from to
No. 3, from **1971** to **1978** No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
7"	20 1/2	8 Rd.	Pitts.	635.9'	Larkin		None	
5 1/2"	14 1/2	8 "	"	1932'	Texas			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
	7"	635.9'	50	Halliburton		
	5 1/2"	1932'	100	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	4"	Nitro-glycerine	100 qts.	12/17/47	1937-1978	2010

Results of shooting or chemical treatment **Well swabbed 20 bbls. per day before shooting and flowed at that rate after shot.**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

1 **2010**
Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **January 2** 19 **48**
The production of the first 24 hours was **30** barrels of fluid of which **100** % was oil; % emulsion; % water; and % sediment. Gravity, Be **37.6**
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

Kersey & Company

EMPLOYEES

, Driller, Driller
, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Fort Worth, Texas, January 16, 1948
Place DateSubscribed and sworn to before me this **16th**day of **January**, 19 **48****Grace O'Connor**
Notary Public.Name **Robert**
Position **Secretary**Representing **Danciger Oil & Refining Company**
Company or OperatorMy Commission expires **June 1, 1949**Address **Fort Worth, Texas****GRACE O'CONNOR**, Notary Public
In and for Tarrant County, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	15		Sand
15	40		Gyp & red bed
40	50		Red rock
50	85		Red bed
85	265		Red rock
265	425		Anhydrite
425	430		Red bed
430	465		Red bed & gyp
465	475		Red bed
475	485		Anhydrite
485	495		Red bed
495	525		Anhydrite
525	545		Gyp, red rock & salt
545	560		Red bed & salt
560	565		Red rock
565	630		Red rock & salt
630	635		Red rock
635	1200		Salt
1200	1425		Anhydrite
1425	1450		Anhydrite & brks. shale
1450	1475		Anhydrite
1475	1500		Brkn. shale & anhydrite
1500	1835		Anhydrite
1835	1875		Anhydrite & lime
1875	1917		Anhydrite & brown lime
1917	1925		Anhydrite
1925	1928		Brown sand
1928	1937		Gray lime
1937	1940		Brown sand
1940	1953		Anhydrite
1953	1971		Gray lime
1971	1978		Brown lime, sandy
1978	1987		Gray lime
1987	2000		Anhydrite
2000	2010		Anhydrite & lime
2010	T.D.		