

O+4-USGS

1-File

1 -Admin. Unit--Midland

1 -Engineer (S)

1 -Foreman (EF)

Form 9-331
Dec. 1973Form Approved.
Budget Bureau No. 42-R1424

**UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY**

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-0 for such proposals.)

1. Oil well ☒ GAS well ☐ other ☐

2. NAME OF OPERATOR

Getty Oil Company

3. ADDRESS OF OPERATOR

P. O. Box 730, Hobbs, New Mexico

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: Unit Ltr. E, 1874' FNL & 766' FWL

AT TOP PROD. INTERVAL: 2 3/8 FNL & 911' FWL

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐FRACTURE TREAT ☐SHOOT OR ACIDIZE ☒REPAIR WELL ☐PULL OR ALTER CASING ☐MULTIPLE COMPLETE ☐CHANGE ZONES ☐ABANDON* ☐

(other) Convert to 7-Rivers Injection

SUBSEQUENT REPORT OF:

RECEIVED


MAY 7 1981

U.S. GEOLOGICAL SURVEY
HOBBS, N.M.

NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Rig up pulling unit and install B.O.P.
2. Pull tubing and rods.
3. Run in hole and clean out to T.D.
4. P.O.H. and run back in with tubing and packer.
5. Set packer and acidize.
6. Swab load.
7. P.O.H. and run back in with AD-1 packer and 2 3/8 I.P.C. tubing and set at +2000'.
8. Convert to injection.

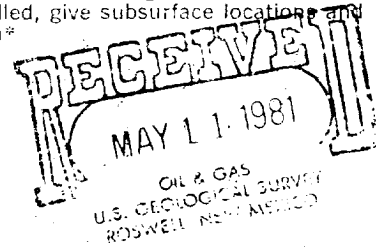

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Area Superintendent DATE

Dale R. Crockett

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

Subject to NMOC approval.

*See Instructions on Reverse Side

