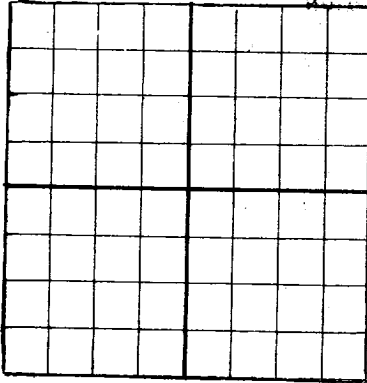


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Date Resler

Company of Operator

Box 464, Artesia, New Mexico

Address

Jones State

Well No.

4

T. 18S

of Sec.

14

T. 18S

R. 27E N. M. P. M. Artesia Field, Edy County.

Well is 1650 feet south of the North line and 330 feet west of the East line of Sec. 14-18-27

If State land the oil and gas lease is No. B-10715 Assignment No. 3

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced 19 Drilling was completed 19

Name of drilling contractor Address

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 595 to 610 No. 4, from 1724 to 1802
 No. 2, from 755 to 765 No. 5, from 1802 to 1814
 No. 3, from 825 to 838 No. 6, from 1814 to 1831

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 170 to 175 feet.

No. 2, from 248 to 260 feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2"	10"	258'	50	Halliburton	50 sacks mud	3 sacks aqueous
8"	7"	1727'	50	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
4 1/2"	Solidified	100qts.	May 5	1831-1800	back to 1853'	

Results of shooting or chemical treatment No water present—100% oil. Initial production 245 barrels.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 1853 feet, and from feet to feet

PRODUCTION

Put to producing May 10 1945

The production of the first 24 hours was 245 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Will Bucknu Driller J. O. Stewart Driller

A. H. Rowrey Driller R. O. Jacobs Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 22

day of May 1945

Notary Public

My Commission expires 4/3/48

Artesia, New Mexico

Date 5-22-45

Name Stanley Jones

Position Agent

Representing Dale Resler

Address Box 464, Artesia, N. Mex.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	10	10	Gyp & Caliche
10	45	35	Red Rock & Gyp
45	75	30	Red Rock & Gyp
75	135	60	Lime & Anhyd.
135	194	61	Anhyd. & Gyp
194	200	6	Red Bed
200	248	48	Red Rock & Anhyd.
248	260	12	Sand
260	270	10	Red Rock
270	310	40	Anhyd.
310	325	15	Lime
325	350	25	Anhyd. & Red Rock
350	375	25	Anhyd. & Red Rock
375	420	45	Anhyd.
420	470	50	Anhyd.
470	520	50	Lime & Anhyd.
520	595	75	Anhyd.
595	610	15	Brown Lime (show of oil)
610	650	40	Grey lime
650	715	65	Anhyd. & Lime
715	755	40	Grey lime
755	765	10	Brown Lime (show of oil)
765	810	45	Anhyd. & Lime
810	825	15	Lime & Anhyd.
825	838	13	Brown Lime (show of oil)
838	845	7	Lime & Anhyd.
845	890	45	Lime & Anhyd.
890	898	8	Anhyd. & Red Sand
898	912	14	Red sand
912	945	33	Anhyd. & Lime
945	995	50	Anhyd. & Lime
995	1010	15	Anhyd.
1010	1050	40	Anhyd.
1050	1080	30	Anhyd.
1080	1110	30	Anhyd.
1110	1150	40	Anhyd.
1150	1155	5	Anhyd.
1155	1175	20	Red sand
1175	1190	15	Anhyd.
1190	1235	45	Anhyd.
1235	1280	45	Anhyd.
1280	1310	30	Anhyd.
1310	1320	10	Anhyd.
1320	1345	25	Anhyd.
1345	1358	13	Red sand
1358	1390	32	Anhyd.
1390	1425	35	Anhyd.
1425	1450	25	Gray sand
1450	1470	20	Broken sand & anhyd.
1470	1510	40	Sand & Anhyd.
1510	1555	45	Sand & Anhyd.
1555	1585	30	Broken anhyd.
1585	1610	25	Sand & Anhyd, lime
1610	1620	10	Lime
1620	1645	25	Lime
1645	1665	20	Lime
1665	1687	22	Lime
1687	1720	33	Lime
1720	1740	20	Lime
1740	1755	15	Lime
1755	1780	25	Lime
1780	1794	14	Lime
1794	1802	8	Sandy lime (show of oil)
1802	1814	12	Sandy gray (oil & gas)
1814	1831	17	Sand & lime (450' or oil in hole)
1831	1850	19	Lime
1850	1853	3	Lime-
1853	-	-	-