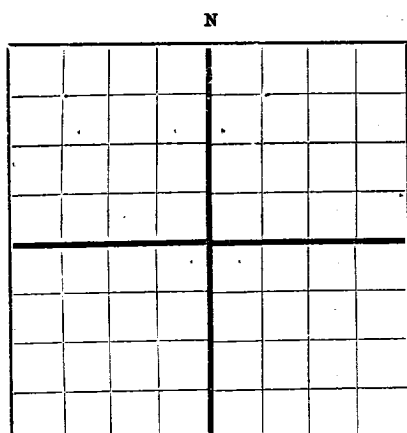


RECEIVED
OCT 11 1949AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoOil Cons. Comm.
Artesia Office

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Reeler Oil Company, Carpenter Building, Artesia, New Mexico
Company or Operator Address
Shuler Well No. 2 in 27/4 of Sec. 5, T. 18N
Lease
R. 27E, N. M. P. M., Lone Hills Field, 27E County.
Well is 4290 feet south of the North line and 2970 feet west of the East line of Section 5.
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Shuler Address.
If Government land the permittee is Address.
The Lessee is Address.
Drilling commenced June 22nd 19 49 Drilling was completed July 23rd 19 49
Name of drilling contractor S. P. Yates Drilling Co. Address Artesia, New Mexico
Elevation above sea level at top of casing 3547 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from none to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
5 1/2	24	8rd		2970	T. P.				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
7"	5 1/2	2970'	50 Sack	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Dowell Acid	2000 Gal	8/2/49	2910-3100	

Results of shooting or chemical treatment none

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 2726 feet to 3100 feet, and from feet to feet

PRODUCTION

Put to producing August 10, 1949
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

A. O. Jacobs, Driller
W. J. Olney, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 11th day of October, 19 49
Notary Public

My Commission expires June 25, 1952

Artesia, New Mexico October 11, 1949
Name: [Signature]
Position: Geologist
Representing: Reeler Oil Company
Address: Carpenter Building, Artesia, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
2642	53		60% grey cemented sand 40% white f. x. dolo.
2642	53		XX
2642	53		XXXXXX
2653	63		XX
			40% grey cemented sand 40% white f. x. dolo 20% pk. dolo.
2663	79		40% grey cemented sand 10% pink dolo 50% white f. x. dolo.
2679	85		10% grey cemented sand 10% pink dolo 80% white f. x. dolo.
2685	90		60% grey sand wf. f. q. g. 20% buff dolo 20% pk. dolo.
2690	92		40% grey sand 60% buff dolo.
2702	26		white f. x. dolo.
2728	27		buff f. x. dolo.
2727	40		white f. x. dolo.
2740	50		buff f. x. dolo 5% has oil stained porosity
2750	75		white f. x. dolo.
2775	85		buff f. x. dolo trace grey shale
2785	28		buff f. x. dolo.
2828	34		90% buff f. x. dolo 10% grey shale
2834	45		80% buff f. x. dolo 20% grey sand
2845	49		grey sand
2849	52		grey slightly sandy dolo.
2852	70		buff f. x. dolo.
2870	90		" " " "
2900	35		" " " "
2941	51		buff slightly oolitic dolo- No porosity
2951	59		buff slightly oolitic dolo. Trace has porosity and stain.
2959	69		buff to white flaky slightly oolitic dolo.
2969	76		buff f. x. dolo.
2976	87		buff f. x. dolo 20% oolitic clusters- faint stain.
2987	94		buff oolitic dolo. some black staining in porosity. Driller reported 1 bailer blk. H ₂ O in 5 hrs.
2994	97		light buff f. x. dolo.
3007	15		light buff f. x. oolitic dolo. 10% in clusters- trace stain & Porosity
3015	20		light buff slightly oolitic dolo. Trace appears to be slightly porous
3020	32		buff f. x. dolo.
3032	42		buff coarsely xyn granular oolitic dolo -some porosity and slight oil stain.
3042	47		buff f. x. dolo.
3047	72		buff f. x. dolo.
3072	84		buff f. x. dolomite
3084	88		buff f. x. dolomite
3088	95		buff f. x. dolomite
3095	99		tan coarsely xyn dolo.
3100	96		buff f. x. dolo.
			Steel line measurement 3106 equals 3101