


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

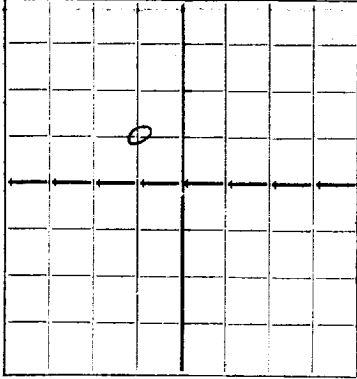

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Stanolind Oil and Gas Company Hobbs, New Mexico
Company or Operator Address
State "N" Well No. 1 in SE/4 SW/4 of Sec. 2, T. 20S
Lease
R. 31E, N. M. P. M., Wildcat Field, Eddy County.
Well is 1980 feet south of the North line and 1980 feet East of the West line of Sec. 2, T-20-S, R-31-E
If State land the oil and gas lease is No. (Wildcat) Assignment No. _____
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is _____ Address _____
Drilling commenced September 15 1944 Drilling was completed November 3 1944
Name of drilling contractor Yates Drilling Company Address Artesia, New Mexico
Elevation above sea level at top of casing 3476 feet.
The information given is to be kept confidential until Not confidential 19____

OIL SANDS OR ZONES

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from 2479 to 2489 feet. 2000' in 4 hours
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10 3/4"	45#	8V	S.H.	333	None			Cave String*
8 5/8"	32#	8V	S.H.	1100	Larkin			Salt String
7"	20#	8R	New	1560	None			Cave String*

MUDDING AND CEMENTING RECORD

*To be pulled.

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10 3/4"	10 3/4"	SSO	None	Landed		
10	8 5/8" OD	1095	50	Halliburton		
8	7" OD	1560	None	Landed		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from surface feet to 2489 feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing No oil produced. 19____
The production of the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. hole filled with 2000' sulphur water. To be abandoned.

EMPLOYEES

R. H. Chapman Driller M. H. Hargus Driller
Joe Morris Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 6th day of November, 1944
Bob M. Russell Jr. Notary Public
My Commission expires 5-5-47
Hobbs, New Mexico November 6, 1944
Name Leopold Hendrickson
Position Field Superintendent
Representing Stanolind Oil and Gas Company
Address Box "J", Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	330		Surface sands and caliche
330	500		Red beds and sand
500	969		Red beds and anhydrite
969	1035		Anhydrite and red rock
1035	1050		Anhydrite and lime
1050	1110		Anhydrite and red rock
1110	1185		Lime and Anhydrite
1185	1285		Anhydrite and salt
1285	1561		Salt and anhydrite
1561	1875		Salt
1875	1955		Salt and anhydrite
1955	2035		Salt
2035	2082		Salt and red rock
2082	2115		Anhydrite
2115	2245		Lime and anhydrite
2245	2270		Sand and lime
2270	2360		Lime, sand, and shale
2360	2390		Lime - trace of heavy black residue
2390	2400		Sand and lime
2400	2425		Lime
2425	2460		Lime and sand - trace of heavy black residue
2460	2480		Lime
2480	2484		Hole filled with 8000' sulphur water. Ran SIM and found T.D. at 2484.
2484	2489		Lime - Total Depth.