

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED
DEC 01 1993

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FSL & ~~180'~~ FEL (Unit I) of Section 6-T24S-R31E

330' 375

5. Lease Designation and Serial No.

NM-82904

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Adeline ALN Federal #9

9. API Well No.

30-015-27250

10. Field and Pool, or Exploratory Area

Wildcat Delaware

11. County or Parish, State

Eddy Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☒ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Spudded 26" hole 11:45 AM 9-15-93. Set 40' of 20" conductor pipe. Redi-mix to surface. Notified BLM, Carlsbad, NM, of spud. Resumed drilling 3:00 PM 9-24-93. Ran 11 joints 13-3/8" 54.5# J-55 casing set 500'. Guide shoe set 500', insert float set 455'. Cemented w/250 sx PSL "C" w/2% CaCl2 (yield 1.76, wt 12.9). Tailed in w/250 sx Class "C" w/2% CaCl2 + 1/4#/sx Celloseal (yield 1.32, wt 14.8). PD 12:50 AM 9-25-93. Bumped plug to 500 psi, float did not hold. Circulated 145 sacks cement. WOC. Drilled out 1:30 AM 9-26-93. WOC 24 hours and 40 minutes. NU and tested to 500 psi for 15 minutes. Reduced hole to 11" and resumed drilling.

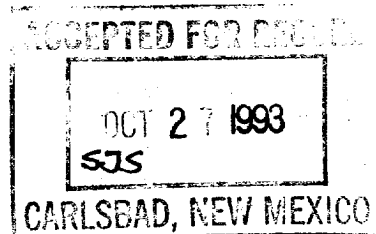

14. I hereby certify that the foregoing is true and correct

Signed Antonio Doadatti

Title Production Supervisor

Date 10-5-93

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title _____

Date _____