

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

30-015-23563

## APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

## 1a. TYPE OF WORK

DRILL ☒DEEPEN ☐PLUG BACK ☐

## b. TYPE OF WELL

OIL  
WELL ☒GAS  
WELL ☐OTHER ☐SINGLE  
ZONE ☐MULTIPLE  
ZONE ☐

## 2. NAME OF OPERATOR

Hanson Oil Corporation

## 3. ADDRESS OF OPERATOR

P. O. Box 1515, Roswell, New Mexico 88201

RECEIVED

## 4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)\*

At surface

2310' FSL &amp; 990' FWL, Sec. 25, T.26S, R.31E

DEC 3 1980

At proposed prod. zone

2310' FSL &amp; 990' FWL

## 14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*

18 miles from northeast of Orla, Texas

O. C. D.  
ARTESIA, OFFICE

## 15. DISTANCE FROM PROPOSED\*

LOCATION TO NEAREST  
PROPERTY OR LEASE LINE, FT.  
(Also to nearest drlg. unit line, if any)

990'

## 16. NO. OF ACRES IN LEASE

640

17. NO. OF ACRES ASSIGNED  
TO THIS WELL

40

18. DISTANCE FROM PROPOSED LOCATION\*  
TO NEAREST WELL, DRILLING, COMPLETED,  
OR APPLIED FOR, ON THIS LEASE, FT.

950'

## 19. PROPOSED DEPTH

4300'

## 20. ROTARY OR CABLE TOOLS

Rotary

## 21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3119.3' G.L.

## 22. APPROX. DATE WORK WILL START\*

Rig Availability

## 23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12-1/4"	8-5/8"	24#	450'	150 sx
7-7/8"	4-1/2"	9.5#	4300'	175 sx

It is proposed to drill the above captioned well from surface to 4300' with a rotary rig. If commercial oil or gas is found, the above casing program will be followed. Blowout preventors will be used during drilling and completion operations.

RECEIVED

OCT 29 1980

U.S. GEOLOGICAL SURVEY  
ARTESIA, NEW MEXICOPosted 10/29/80  
RTI + M. B. B. 12-5-80

24. ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

25

SIGNED

TITLE Vice-Pres., Drilling &amp; Prod. DATE 10-22-80

(This space for Federal or State office use)

PERMIT NO.

(Off. Sgd.) GEORGE H. STEWART

APPROVAL DATE

ACTING DISTRICT ENGINEER

DATE

NOV 20 1980

CONDITIONS OF APPROVAL, IF ANY:

**MEXICO OIL CONSERVATION COMMISSION  
WELL LOCATION AND ACREAGE DEDICATION PLAT**

Form C-102  
Supersedes C-128  
Effective 1-1-65

All distances must be from the outer boundaries of the Section


Operator <b>Hanson Oil Corp.</b>			Lease <b>Hanson Fed.</b>		Well No. <b>16</b>
Unit Letter <b>L</b>	Section <b>25</b>	Township <b>26 South</b>	Range <b>31 East</b>	County <b>Eddy</b>	
Actual Footage Location of Well: <b>990</b> feet from the <b>west</b> line and <b>2310</b> feet from the <b>south</b> line					
Ground Elev. Elev. <b>3119.3</b>	Producing Formation <b>Delaware</b>		Pool <b>Mason Delaware North</b>	Dedicated Acreage: <b>40</b> Acres	

1. Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation \_\_\_\_\_

If answer is "no," list the owners and tract descriptions which have actually been consolidated (Use reverse side of this form if necessary.) \_\_\_\_\_

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

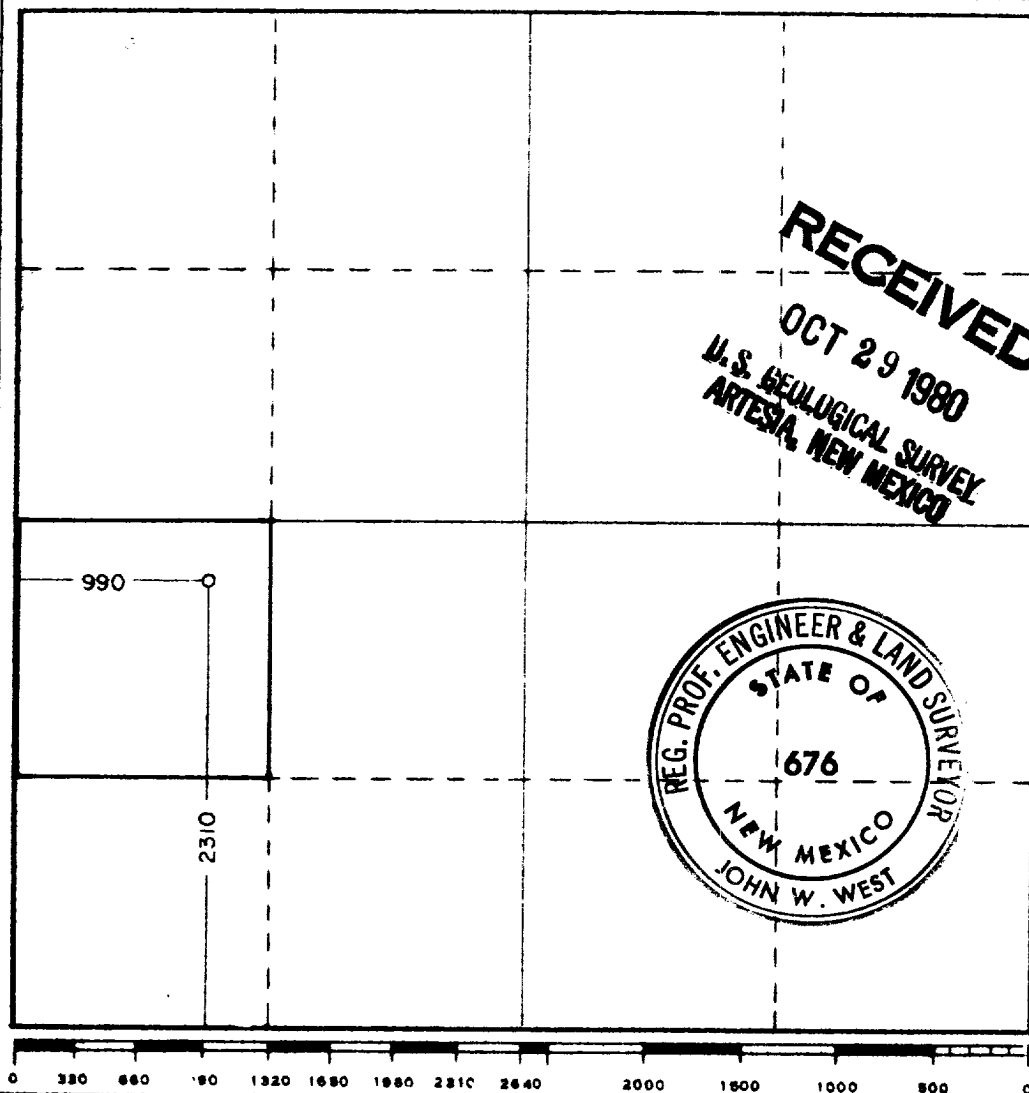

<b>CERTIFICATION</b>	
I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief	
<i>A. J. Deans</i> Name	
A. J. Deans Position	
Vice-Pres., Drilling & Prod. Company	
Hanson Oil Corporation Date	
October 22, 1980	
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.	
Date Surveyed	
9-20-80	
Registered Professional Engineer and/or Land Surveyor	
<i>John W. West</i>	
Certificate No.	676
JOHN W. WEST	676
PATRICK A. ROMERO	6868
Ronald J. Eidson	3239

APPLICATION FOR DRILLING

HANSON OIL CORPORATION HANSON FEDERAL #16

EDDY COUNTY, NEW MEXICO

In conjunction with permitting subject well for drilling in Section 25, Township 26 South, Range 31 East, N.M.P.M., Eddy County, New Mexico, Hanson Oil Corporation submits the following ten points of pertinent information in accordance with U.S.G.S. letter of July 1, 1976:

1. The geologic surface formation is Aluvium sand.
2. The estimated tops of geologic markers are as follows:

Rustler	1560'
Top Salt	1990'
Base Salt	3800'
Top Delaware Lime	4170'
Top Delaware Sand	4200'
3. The depth at which water, oil or gas are expected to be encountered is:

4170'
4. Casing Program:

8-5/8" 24# K-55 to 450' (Used), cemented w/150 sx
4-1/2" 9.4# K-55 to 4300' (New), cemented w/175 sx
5. Blowout Preventers:

Ram type series 900 with double hydraulic rams.  
This is a Schaffer blowout preventer (2000# working pressure, 4000# Test) with a Payne closing unit.  
The fill, kill and choke lines are indicated on the blowout preventer specification sheet -  
See Exhibit #5.
6. Circulating Medium:

Earthen pits will be used to hold mud and cuttings and the drilling fluid as follows:

1-4100'	Native, supplemented with aqua gel and lime or Quick-Gel
4100'-4300'	Mud up when indicated for hole conditions as follows: <div style="margin-left: 40px;">Bring WT to 8.9# Bring VIS to 38 Lower Water Loss to 10</div>

APPLICATION FOR DRILLING (Continued)

HANSON OIL CORPORATION HANSON FEDERAL #16

EDDY COUNTY, NEW MEXICO

7. The Auxiliary equipment, kelly cocks and floats at the bit will not be used in drilling the subject well. The mud system (pit level) will be monitored visually by the rig crew. A sub with a full opening valve for stabbing into drill pipe when the kelly is not in the string will be available on the rig floor at all times.
8. No drillstem test or cores will be taken. GammaRay Caliper and Formation Density Logs will be run from the base of the surface to total depth.
9. Anticipated Bottom Hole Pressure (open) BHP:  
  
Based on offsetting BHP data, the BHP in subject well is anticipated to be approximately 2500 PSI
10. Anticipated starting date is per rig availability. Perforating and stimulating of subject well will be immediately after drilling operations are finished.

**RECEIVED**  
**OCT 29 1980**  
**U.S. GEOLOGICAL SURVEY**  
**ARTESIA, NEW MEXICO**

SURFACE USE AND OPERATIONS PLAN

HANSON OIL CORPORATION HANSON FEDERAL #16

EDDY COUNTY, NEW MEXICO

The following information and plan is submitted for the subject well by Hanson Oil Corporation:

1. Existing roads in the vicinity of planned well are shown on the attached Exhibit #1. As shown, the planned well is approximately 47 miles South-east of Carlsbad, New Mexico. To reach subject well from Carlsbad, New Mexico, go South on U.S. Highway 285; follow this highway southeasterly for 6 miles; turn East on State Highway 128; follow said highway 27 miles; turn South on County highway towards Orla, Texas; continue South for 14 miles; turn West on lease road; continue on lease road approximately 1½ miles; turn North on said lease road passing Hanson Federal #1, continue ½ mile, then east to location.
2. The planned access road is shown on attached Exhibits #1 and #6. Only grading will be necessary on existing lease road. Terrain where the road is planned is relatively flat. No culverts will be necessary as only insignificant widely dispersed drainage could occur across the proposed route.
3. Location of existing wells in a three-mile radius are shown on attached Exhibit #2.
4. There is production equipment on this lease at present. If production is established from this well, we will use existing tank battery for new production.
5. It is planned to drill the proposed well with a brine water system. Water will be from the disposal system currently in use for this lease. Additional storage will be at drillsite in the form of two 500 barrel tanks. Water will be pumped from salt water disposal to location.
6. All construction materials will be of local original and no surface materials will be disturbed except those necessary for the actual grading of the road and drilling site.
7. Drill cuttings will be accumulated in the earthen reserve pit and after the pit has dried will be bladed into the bottom of the pit and buried. Trash and garbage will be contained in an earthen pit and be buried following drilling operations. The drilling fluid will be left in the reserve pit and allowed to evaporate after any oil accumulation on the pit has been removed and hauled to the production facility for recovery. Drilling fluid residue (bentonite, drill solids, etc.) will be buried in the reserve pit after drilling operations and evaporation of water in the drilling fluid. Sewage will be collected in a pit at least 6' below an outside latrine, suitable chemical will be added to aid decomposition of the waste material and then back filled following completion of the well.

SURFACE USE AND OPERATIONS PLAN (Continued)

HANSON OIL CORPORATION HANSON FEDERAL #16

EDDY COUNTY, NEW MEXICO

8. No ancillary facilities will be constructed.
9. Rig layout and cross section of the planned drilling site are shown on attached Exhibits #3 and #4. Plans are to line the earthen reserve pit with polyethylene.
10. Following completion of drilling operations, all pits will be filled (after they dry up) and area surrounding the location leveled. We will then reseed using as much top soil as possible and utilizing seed types and quantities as recommended for this area by agronomist and the Bureau of Land Management. Top soil will be stored when the location is graded. Unused portions of the location will be reseeded. If the well is non-productive, the entire location and access road will be graded to conform with original topography, top soil spread and the entire location reseeded. All reseeded will be done with reasonable effort to establish a more attractive soil stabilizing growth effort of vegetation than what previously existed at the site. Reseeding will take place at the first opportunity following completion of operations in accordance with the recommended seasonal seeding periods.
11. The area around the drilling site has a gradual sloping trend to the southwest. There are no large draws or hills near the location. Drainage is to the southwest. The surface supports a sparse growth of grass. The surface at the location is Federally owned.
12. The Hanson Oil Corporation representative conducting this drilling operation is:

Mr. A. J. Deans  
P. O. Box 1515  
Roswell, New Mexico 88201

Phone No: (505) 622-7330 - Office  
(505) 623-7364 - Home

CERTIFICATION


I hereby certify that I, or persons under my direct supervision have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are to the best of my knowledge, true and correct; and, that work associated with the operations proposed herein will be performed by Hanson Oil Corporation and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

10-22-80  
(Date)

A. J. Deans  
A. J. Deans  
Vice-President, Drilling & Production

MINIMUM BLOW-OUT PREVENTER REQUIREMENTSEXHIBIT "5"

Drilling nipple to be so constructed that it can be removed, without use of a welder, through rotary table opening

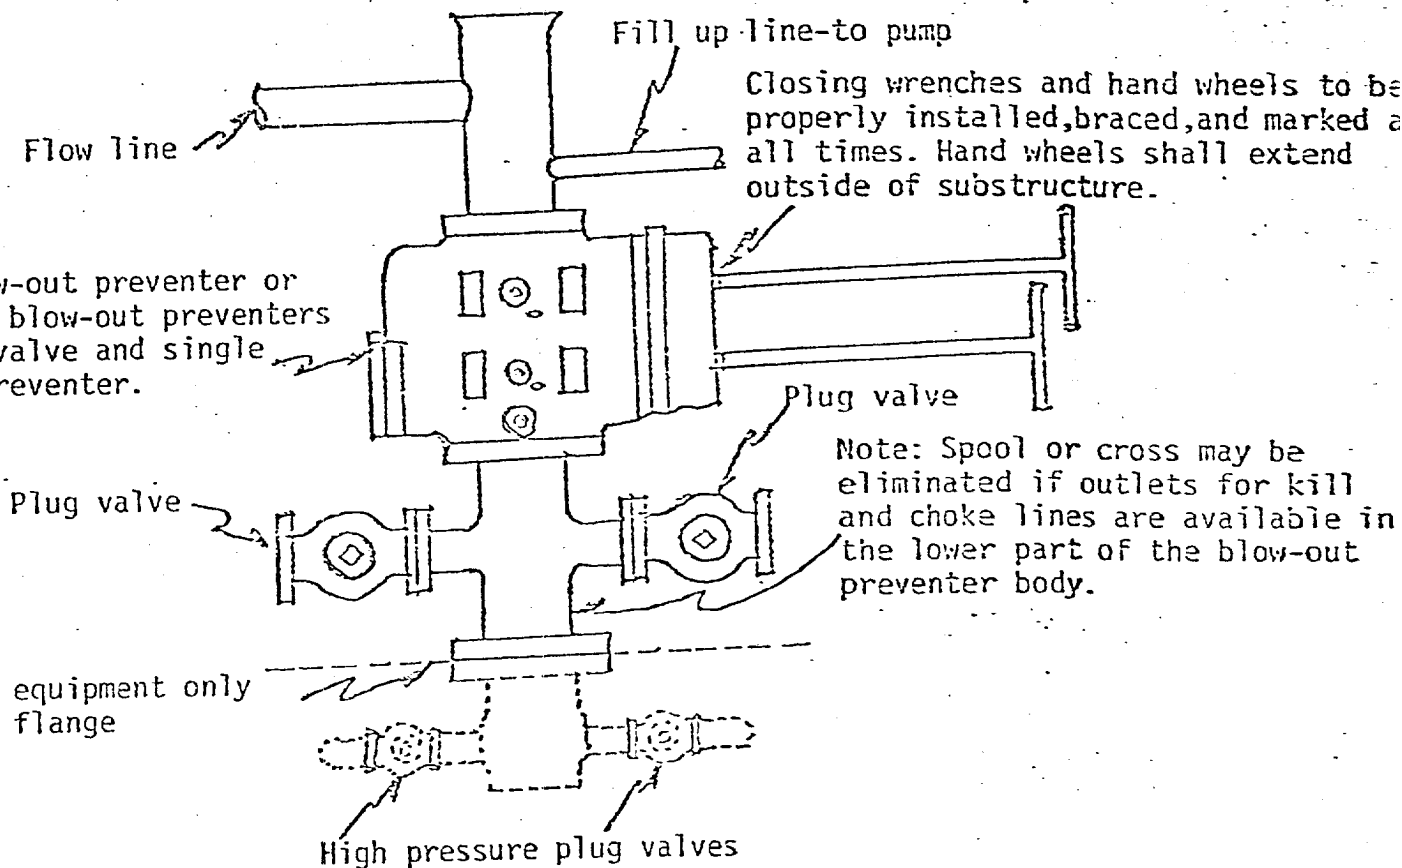

## NOTE:

When drilling use:  
 Top Preventer-Blind rams or master valve  
 Bottom Preventer-Drill pipe rams

When running casing use:  
 Top Preventer-Casing rams  
 Bottom Preventer-Blind rams or master valve

## NOTE:

1. Blow-out preventers, master valve and all fittings must be in good condition. 2,000 W.P. (4,000 P.S.I. test) minimum.
2. Equipment through which bit must pass shall be as large as inside diameter of the casing that is being drilled through.
3. Nipple above blow-out preventer shall be same size as casing being drilled through.
4. All fittings to be flanged.
5. Safety Valve (2" minimum opening) w/ sub or connection to drill pipe on floor at all times.