

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

2040 Pacheco St.
Santa Fe, NM 87505

WELL API NO. 30-025-22944
Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
State Oil & Gas Lease No. A-1118

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		Lease Name or Unit Agreement Name Shell "A" State
Type of Well: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>		
Name of Operator Occidental Permian, Ltd		Well No. 6
Address of Operator 1017 W. Stanolind Rd. Hobbs, New Mexico 88240		Pool name or Wildcat Hobbs;Blinebry
Well Location Unit Letter <u>G</u> : <u>1930</u> Feet From The <u>North</u> Line and <u>2310</u> Feet From The <u>East</u> Line Section <u>32</u> Township <u>18-S</u> Range <u>38-E</u> NMPM <u>Lea</u> County		
Elevation (Show whether DF, RKB, RT, GR, etc.) 3635' GL		

11

Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐
OTHER: ☐

SUBSEQUENT REPORT OF:


REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ANBANDONMENT ☒
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

03/03/2004 Set 8 5/8" CIBP @ 2980'. Tagged with tubing.
03/04/2004 Circulate well w/ plugging mud. Spot 75 sks of cement 2980'-2691'.
Perf @ 2000' Pressured up on perms to 3000 psi-Held. Spot 45 sks of cement @ 2060'. Tagged @ 1898'
03/05/2004 Perf @ 407'. Establish injection rate @ 2 BPM 500psi. Squeezed 100 sks of cement. Tagged TOC @ 289'
Spot 15 sk surface plug 30'-surface

Cut off well head & anchors 4' BGL. Cap well w/ steel plate. Install dry hole marker.

Approved as to plugging of the Well Bore.
Liability under bond is retained until
surface restoration is completed.

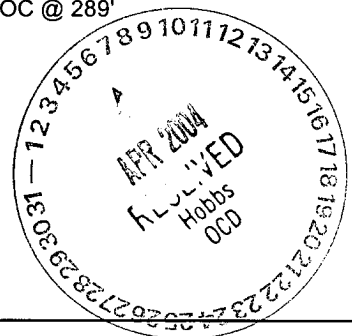

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Robert Gilbert TITLE WO Compl Specialist DATE 4-5-04
TYPE OR PRINT NAME Robert Gilbert TELEPHONE NO. 397-8206

(This space for State Use)

APPROVED BY Harry W. Wink TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER DATE APR 07 2004

CONDITIONS OF APPROVAL, IF ANY