

UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
1625 N. French Drive  
Mesa, NM 88240SUBMIT IN TRIPLICATE  
(Other instructions on reverse side)  
District IFORM APPROVED  
OMB NO. 1004-0136  
Expires: February 28, 1995

## APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. NM-65441	
b. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <input type="checkbox"/>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME -----	
2. NAME OF OPERATOR PURE RESOURCES, L.P. (KEN KRAWIETZ 432-498-2655) 150628		7. UNIT AGREEMENT NAME -----	
3. ADDRESS AND TELEPHONE NO. 500 WEST ILLINOIS MIDLAND, TEXAS 79701		8. FARM OR LEASE NAME, WELL NO. 33690 MADERA "24" FEDERAL # 1	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.) At surface 1310' FSL & 1310' FWL SECTION 24 T26S-R34E LEA CO. NM. At proposed prod. zone SAME		9. AP WELL NO. 30-025-36666	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE Approximately 18 miles West Southwest of Jal New Mexico		10. FIELD AND POOL, OR WILDCAT WILDCAT-MORROW ✓	
15. DISTANCE FROM PROPOSED LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) 1310'		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA SECTION 24 T26S-R34E	
16. NO. OF ACRES IN LEASE 1280		12. COUNTY OR PARISH LEA CO.	
17. NO. OF ACRES ASSIGNED TO THIS WELL		13. STATE NM	
18. DISTANCE FROM PROPOSED LOCATION TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. NA		20. ROTARY OR CABLE TOOLS ROTARY	
21. ELEVATIONS (Show whether DF, RT, GR, etc.) 3197' GR.		22. APPROX. DATE WORK WILL START WHEN APPROVED	

## 23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
25"	Conductor	NA	40'	Redi-mix cement to surface
17 1/2"	J-55 13 3/8"	54.5	1080'	900 Sx. circulate to surface
12 1/4"	L-80 9 5/8"	43.5	5400'	1600 Sx. " " "
8 1/2"	P-110 7 5/8"	39	13,400'	1905 Sx. Est. TOC 5200'
6 1/2"	P-110 5 1/2"	23	16,500'-13,200'	Production Liner 200 Sx.

Carlsbad Controlled Water Basin

APPROVAL SUBJECT TO  
GENERAL REQUIREMENTS AND  
SPECIAL STIPULATIONS  
ATTACHED

SEE ATTACHED SHEET.

PURE RESOURCES, L.P. ACCEPTS THE RESPONSIBILITY FOR THE OPERATION  
OF THIS LEASE.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Joe T. Garcia TITLE Agent DATE 02/26/04  
(This space for Federal or State office use)PERMIT NO. \_\_\_\_\_ APPROVAL DATE \_\_\_\_\_  
Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations in accordance with the

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY /S/ JOE G. LARA TITLE Acting FIELD MANAGER DATE APR 05 2004

\*See Instructions On Reverse Side

APPROVAL FOR 1 YEAR

PURE RESOURCES, L.P.  
MADERA "24" FEDERAL # 1  
UNIT "M" SECTION 24  
T26S-R34E LEA CO. NM

1. Drill 25" hole to 40'. Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
2. Drill 17½" hole to 1080'. Run and set 1080' of 13 3/8" 54.5# J-55 ST&C casing. Cement with 650 Sx. of Class "C" 35/65 POZ +6% Bentonite, + 2% CaCl, + ¼# Flocele/Sx., tail in with 250 Sx. of Class "C" cement + 2% CaCl, circulate cement to surface.
3. Drill 12¼" hole to 5400'. Run and set 5400' of 9 5/8" 43.5# L-80 LT&C casing. Cement with 1200 Sx. of Class "C" 35/65 POZ + 6% Bentonite, + 5% Salt, + ¼# Flocele/Sx., tail in with 400 Sx. of Class "C" cement + 1% CaCl, circulate cement to surface.
4. Drill 8½" hole to 13,400'. Run and set 13,400' of 7 5/8" 39# P-110 STL casing. Cement in two stages, DV Tool at 7500'±. Cement 1st stage with 765 Sx. of Class "H" 50/50 POZ, + 3% LCM-1, + .4% FL-25, + 10% FL-52, + 10% Gel, + .2% R-21, tail in with 175 Sx. of Class "H" 50/50 POZ, + .6% FL-25, + IDC-32, + 2% Gel. Cement 2nd Stage with 865 Sx. of Class "H" 50/50 POZ, + 3% LCM-1, + .4% FL-25, + 10% FL-52, + 10% Gel, + 5% Salt, tail in with 100 Sx. of Class "H" neat cement. Estimate top of cement 5200' from surface.
5. Drill 6½" hole to 16,500'. Run and set a 3300' 5½" 23# P-110 STL liner. Hang liner at 13,200'±. Cement with 200 Sx. of Class "H" Premium cement + additives, cement to top of liner.

DISTRICT I  
P.O. Box 1980, Hobbs, NM 88241-1980

DISTRICT II  
P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III  
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV  
P.O. BOX 2088, SANTA FE, N.M. 87504-2088

State of New Mexico  
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION

P.O. Box 2088  
Santa Fe, New Mexico 87504-2088

Form C-102  
Revised February 10, 1994  
Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number <b>30-025-36666</b>	Pool Code	Pool Name <b>WILDCAT-MORROW</b>
Property Code <b>33690</b>	Property Name <b>MADERA "24" FEDERAL</b>	Well Number <b>1</b>
OGRID No. <b>150628</b>	Operator Name <b>PURE RESOURCES, L.P.</b>	Elevation <b>3197'</b>

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	24	26-S	34-E		1310	SOUTH	1310	WEST	LEA



Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres <b>320</b>	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

<p>GEODETIC COORDINATES NAD 27 NME = 374026.7 N = 780743.1 E L.T. 32°01'30.28"N LO G. 103°25'38.87"W</p>	<b>OPERATOR CERTIFICATION</b>  I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.   Signature Joe Z. Janica Printed Name Agent Title 02/26/04 Date
	<b>SURVEYOR CERTIFICATION</b>  I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.  FEBRUARY 4, 2004 Date Surveyed Signature & Seal of Professional Surveyor  Certificate No. GARY EIDSEN 12641

SECTION 24, TOWNSHIP 26 SOUTH, RANGE 34 EAST, N.M.P.M.,  
LEA COUNTY, NEW MEXICO.

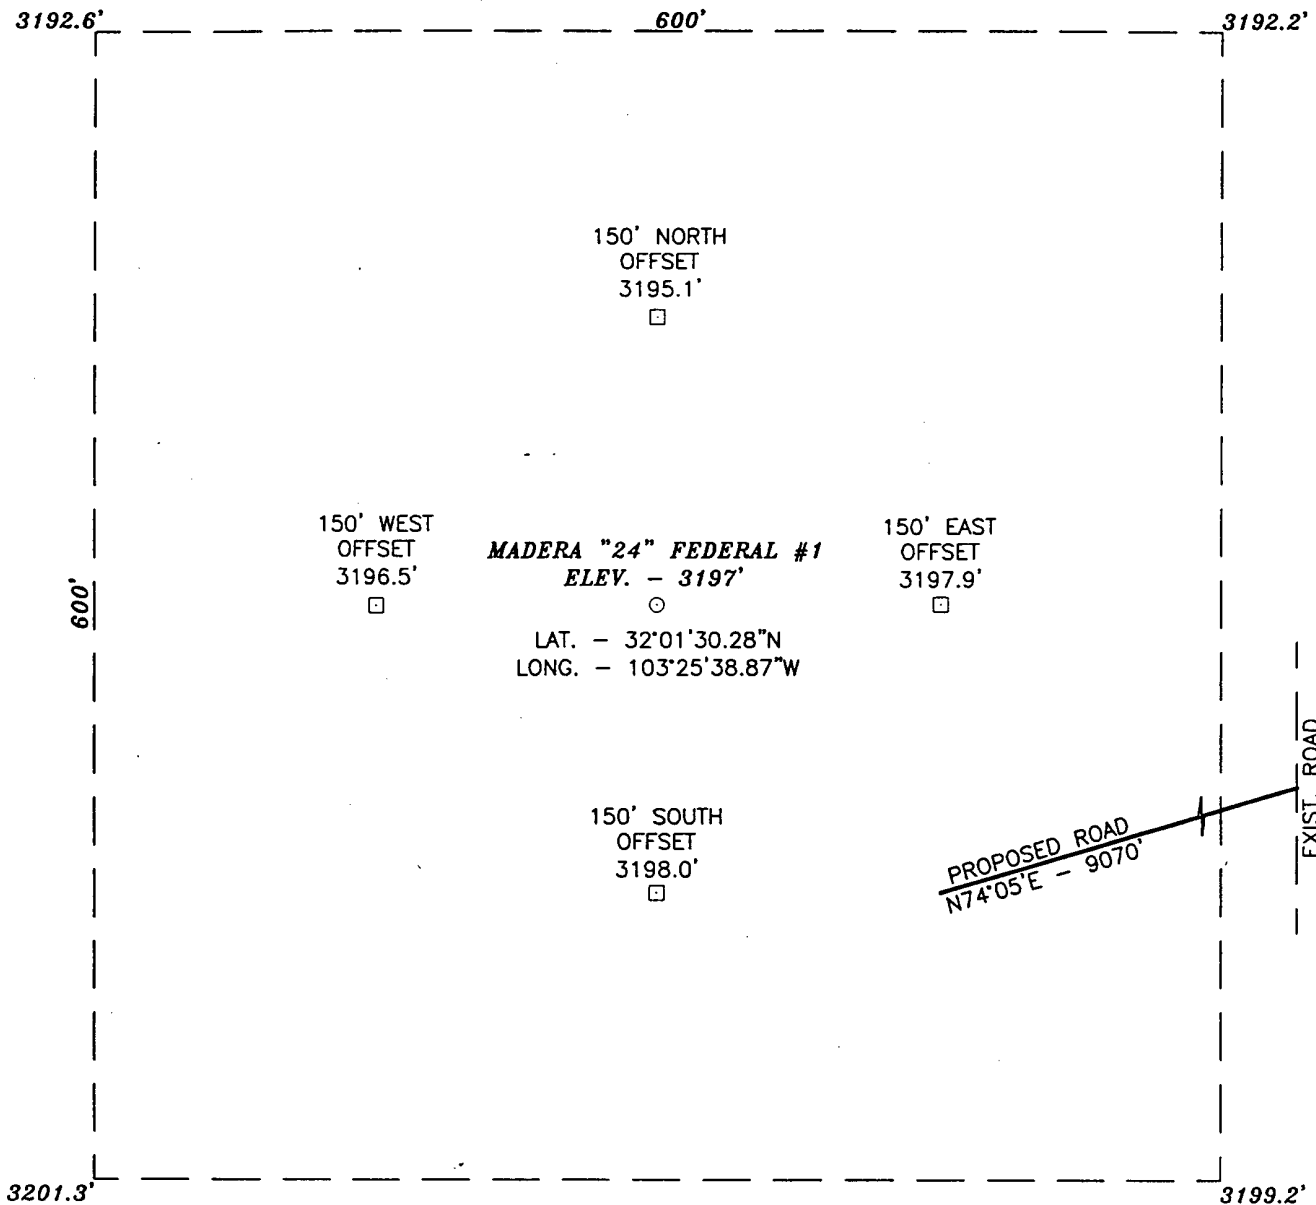

DIRECTIONS TO LOCATION:

AT MILE POST 4.1 AND COUNTY RD. #205 GO THRU LOCKED GATE AT EL PASO NATURAL GAS VALVE SITE ON WEST SIDE OF CO. RD. #205. FOLLOW EL PASO P/L 11.2 MILES TO A ROAD ON LEFT. TURN LEFT (SOUTH) AND GO 2.0 MILES ON DIRT ROAD TO A JEEP TRAIL ON RIGHT. TURN RIGHT (SOUTHWEST) AND GO 2.2 MILES TO LOCATION WHICH WILL BE APPROX. 350' SOUTH.

PURE RESOURCES, L.P.


THE MADERA "24" FEDERAL #1 LOCATED 1310 FROM THE SOUTH LINE AND 1310 FROM THE WEST LINE SECTION 24, TOWNSHIP 26 SOUTH, RANGE 34 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO.

Survey Date: 2/04/04	Sheet 1 of 1 Sheets
W.O. Number: 04.11.0128	Drawn By: L.A.
Date: 2/09/04	DISK:CD#3
04110128	

JOHN WEST SURVEYING COMPANY

412 N. DAL PASO - HOBBS, NEW MEXICO - 505-393-3117


# VICINITY MAP

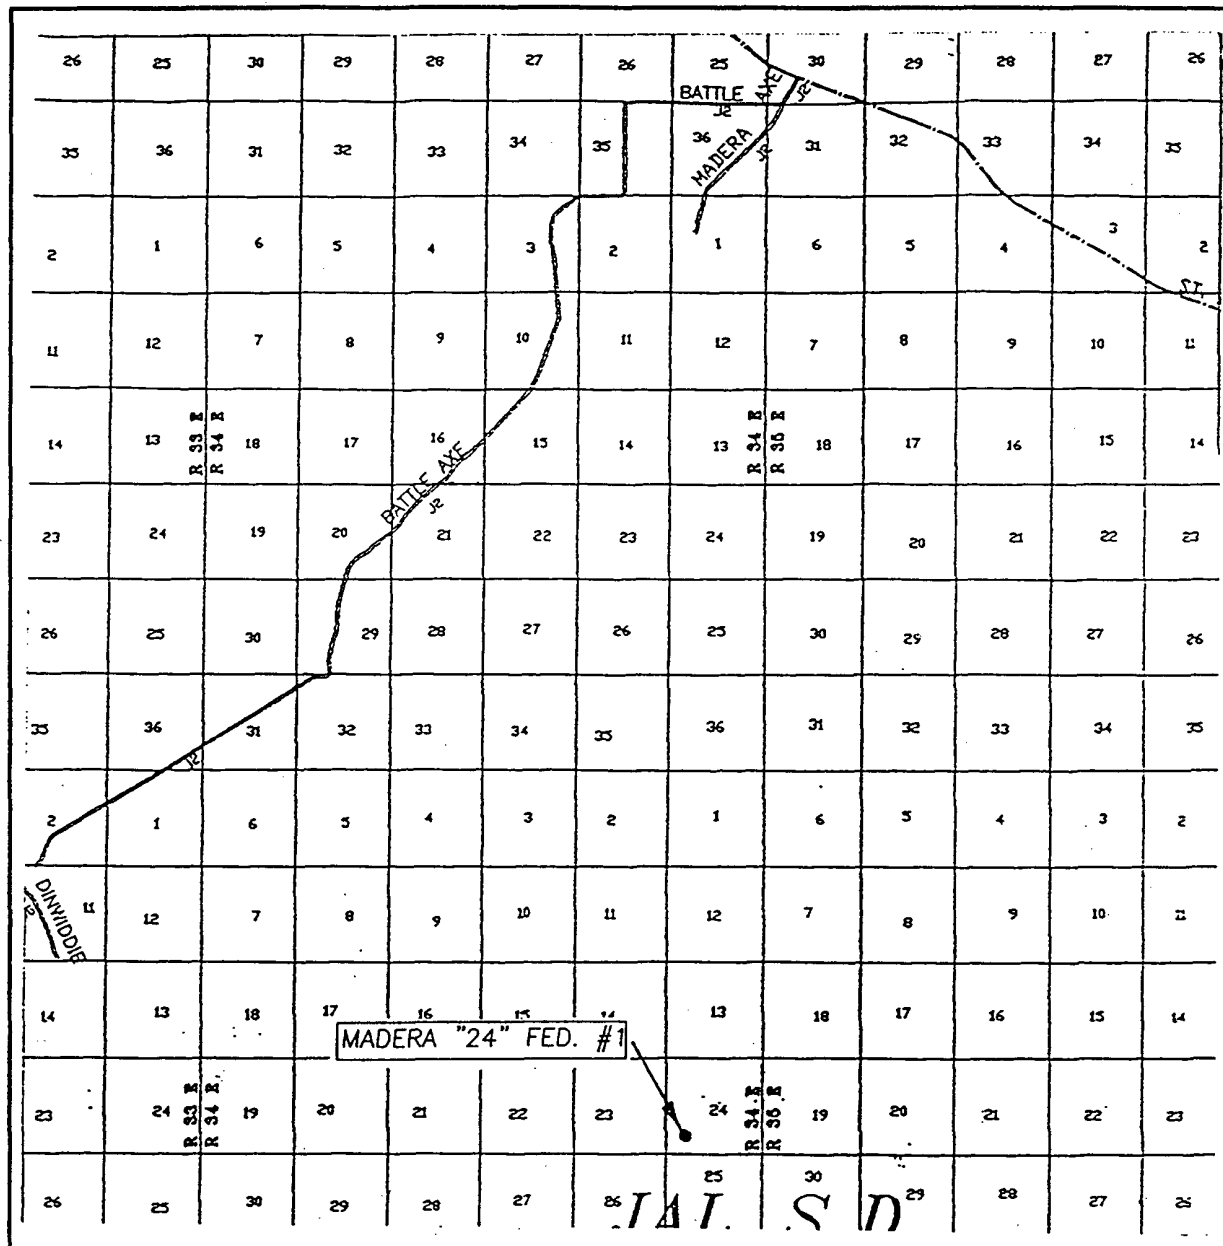

SCALE: 1" = 2 MILES

SEC. 24 TWP. 26-S RGE. 34-E  
 SURVEY N.M.P.M.  
 COUNTY LEA  
 DESCRIPTION 1310' FSL & 1310' FWL  
 ELEVATION 3197'  
 OPERATOR PURE RESOURCES, L.P.  
 LEASE MADERA "24" FEDERAL

**JOHN WEST SURVEYING**  
**HOBBS, NEW MEXICO**  
**(505) 393-3117**

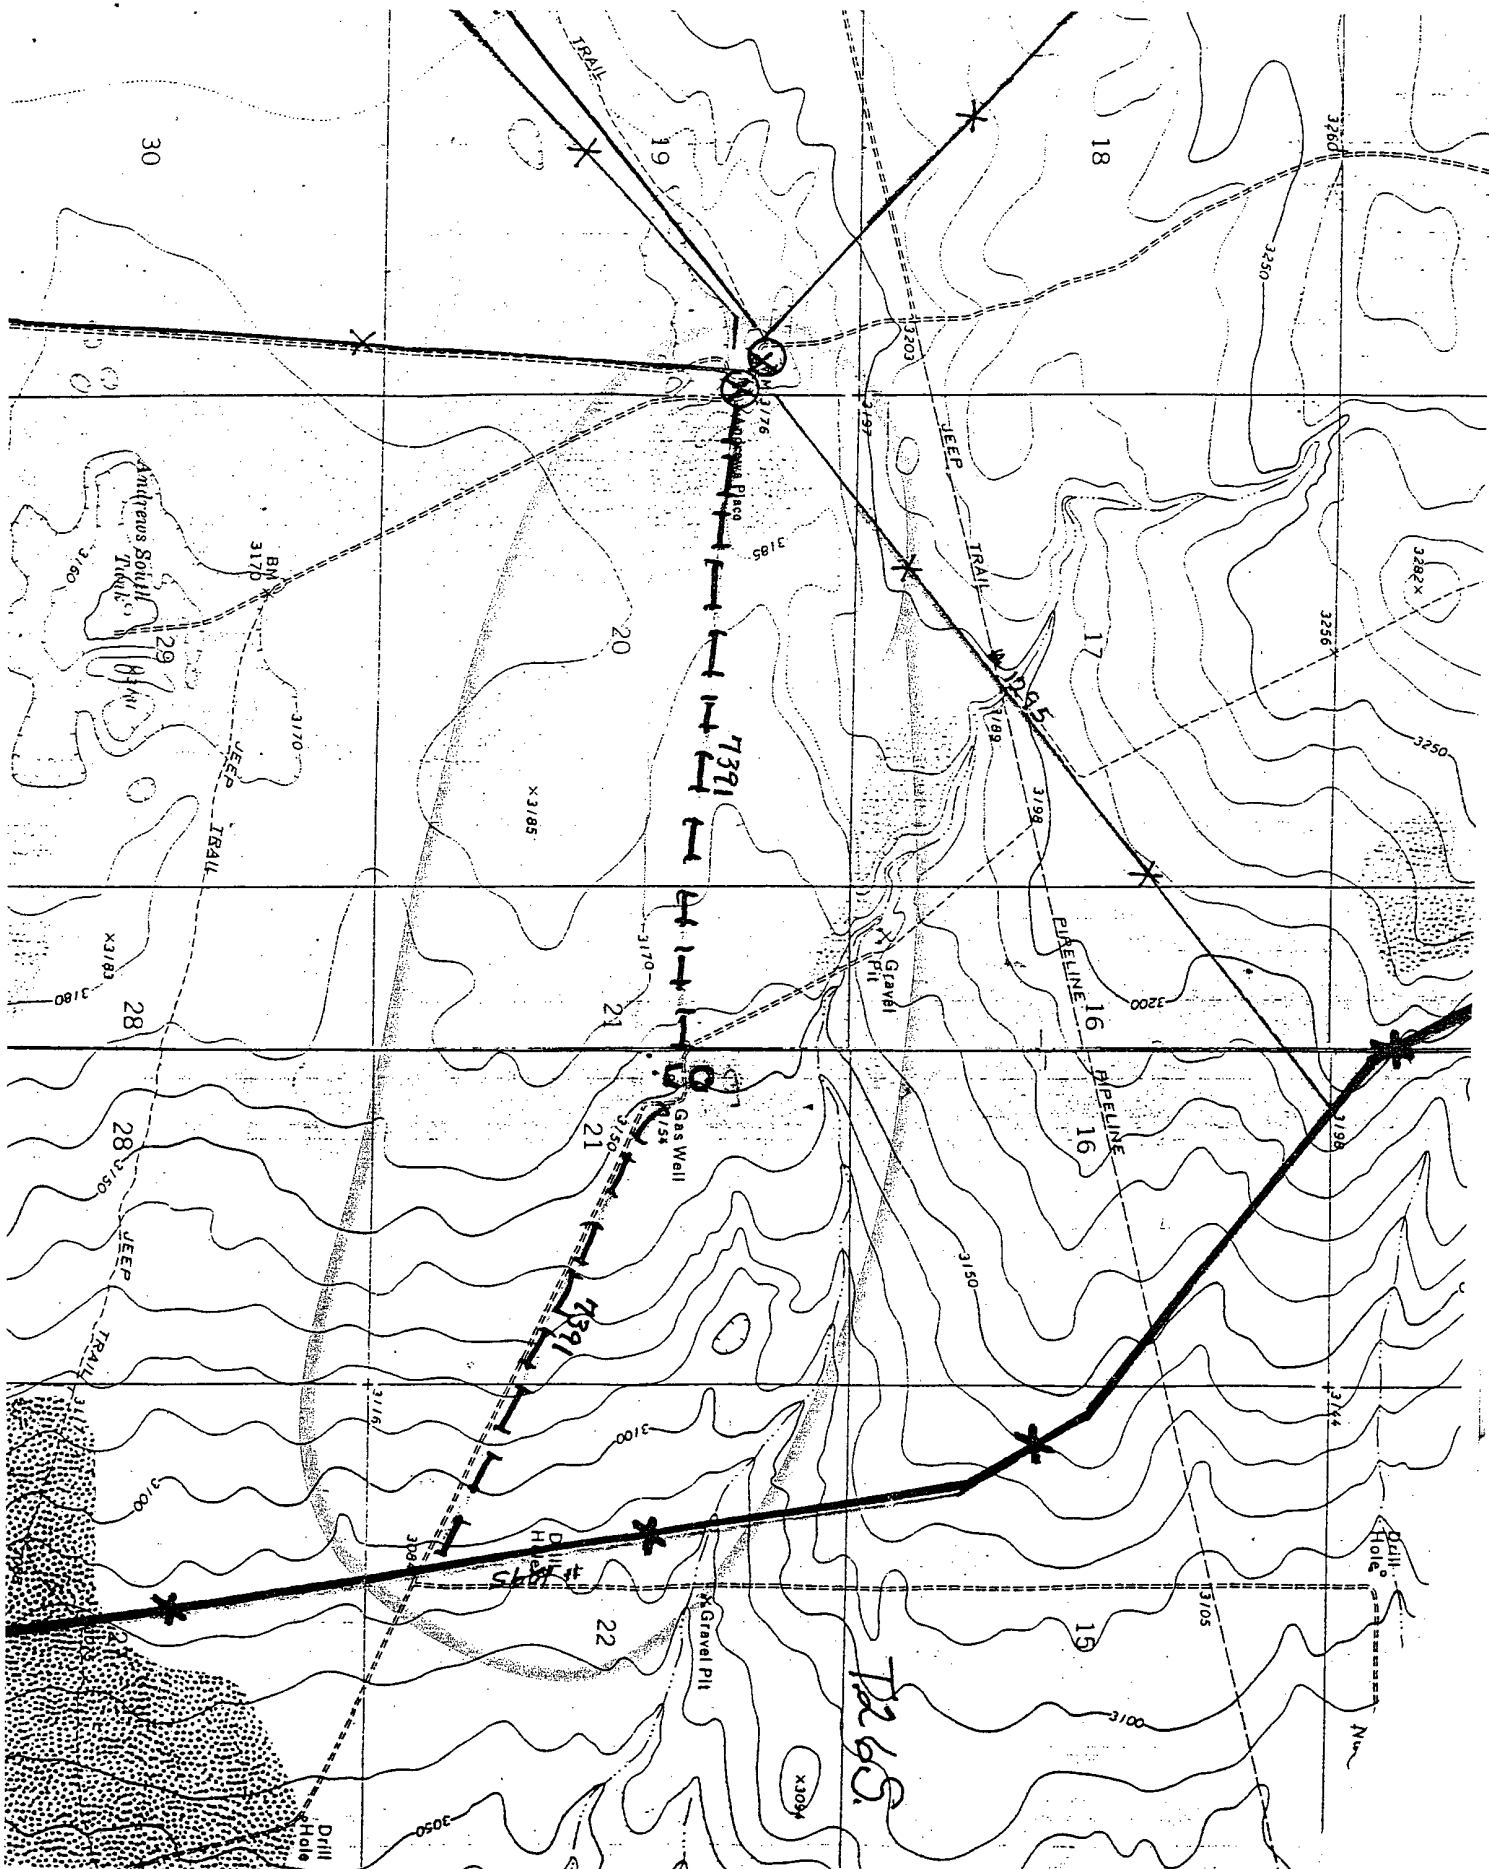


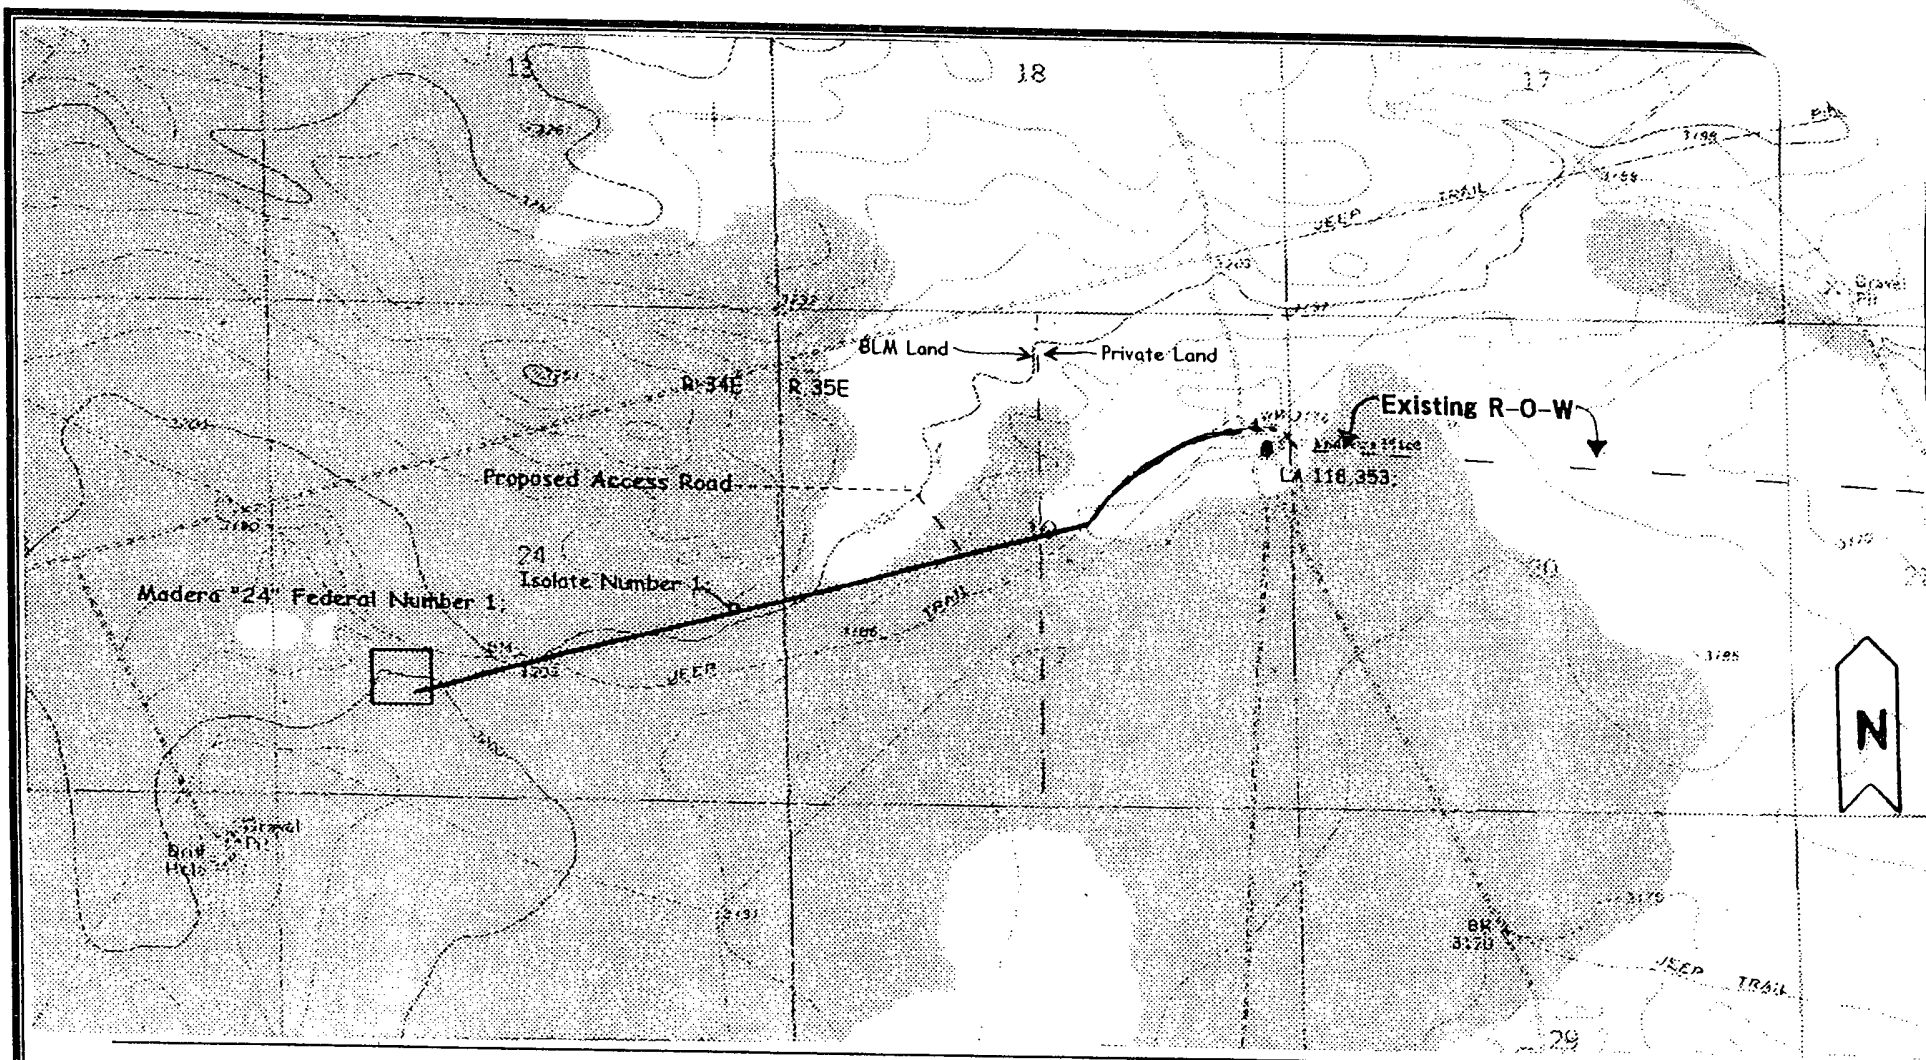


Figure 1. Survey Area Pure Resources, L.P.  
 The Proposed Madera "24" Federal Number 1 Well Location and Access Road, Section 24, T.26S., R.34E and Section 19, T.26S., R.35E  
 USGS Andrews Place, N. Mex. (1973) 7.5' topo map, Lea County, New Mexico  
 Scale 1:24,000

Southern New Mexico Archaeological Services, Inc.

# LOCATION VERIFICATION MAP

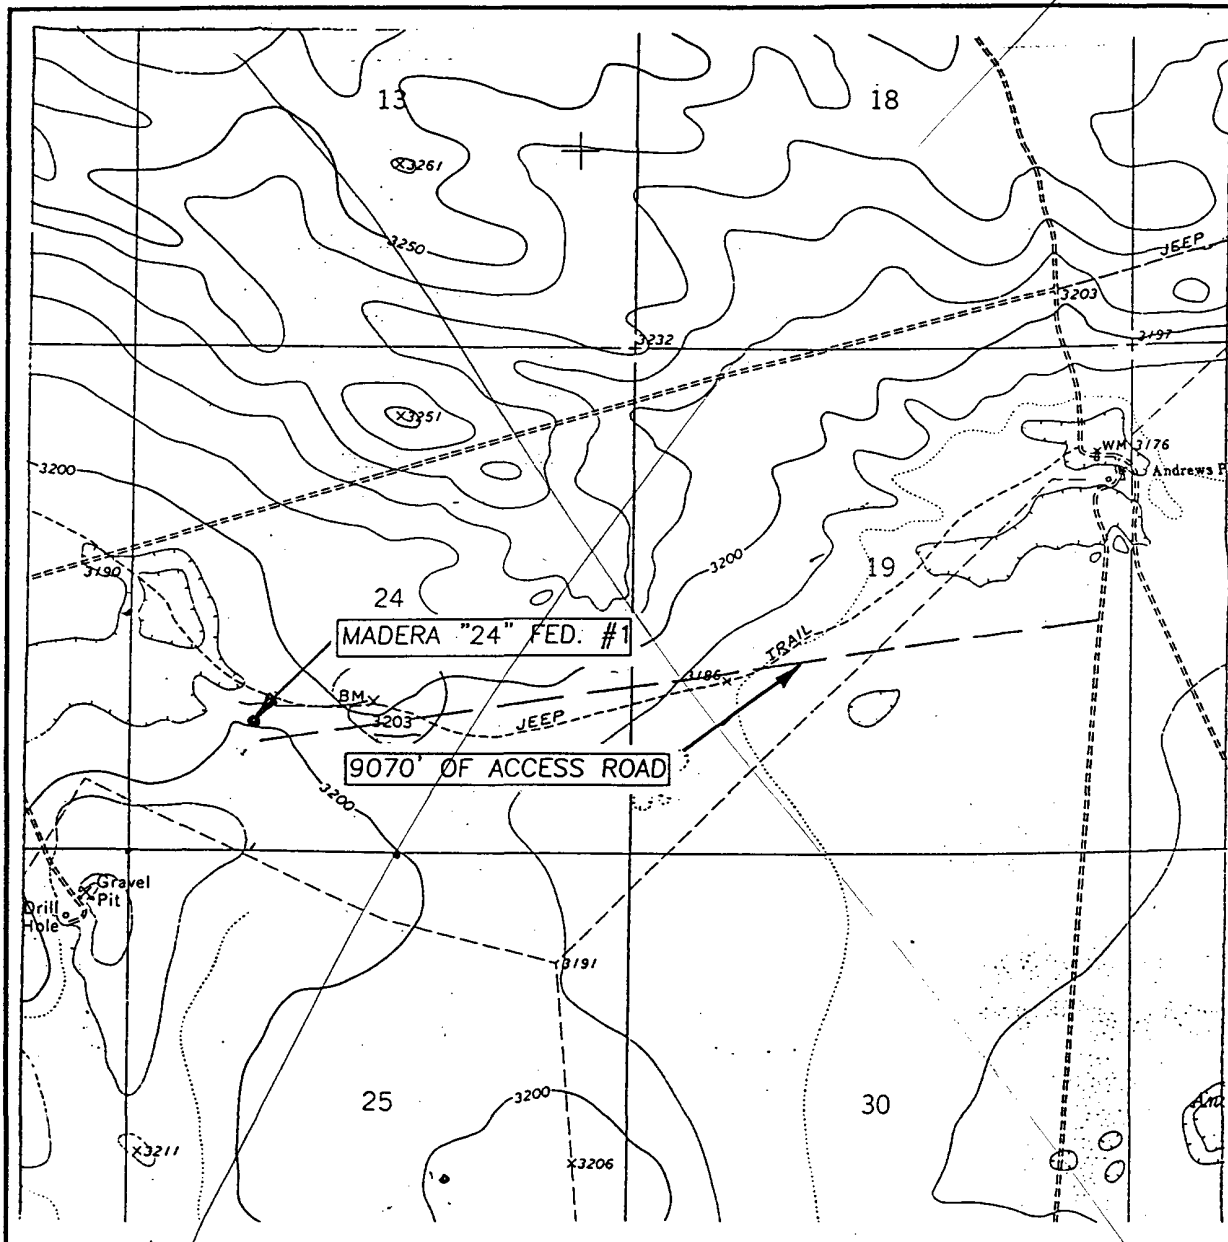

SCALE: 1" = 2000'

CONTOUR INTERVAL: 10'  
ANDREWS PLACE, N.M.

SEC. 24 TWP. 26-S RGE. 34-E

SURVEY N.M.P.M.

COUNTY LEA

DESCRIPTION 1310' FSL & 1310' FWL

ELEVATION 3197'

OPERATOR PURE RESOURCES, L.P.

LEASE MADERA "24" FEDERAL

U.S.G.S. TOPOGRAPHIC MAP  
ANDREWS PLACE, N.M.

JOHN WEST SURVEYING  
HOBBS, NEW MEXICO  
(505) 393-3117



## APPLICATION TO DRILL

PURE RESOURCES, L.P.  
 MADERA "24" FEDERAL # 1  
 UNIT "M" SECTION 24  
 T26S-R34E LEA CO. NM

In response to questions asked under Section II of Bulletin NTL-6 the following information on the above well is provided for your consideration.

1. Location of well: 1310' FSL & 1310' FWL SECTION 24 T26S-R34E LEA CO. NM.

2. Ground Elevation above Sea Level: 3197' GR.

3. Geological age of surface formation: Quaternary Deposits:

4. Drilling tools and associated equipment: Conventional rotary drilling rig using drilling mud as a circulating medium to remove solids from hole.

5. Proposed drilling depth: 16,500'

6. Estimated tops of geological markers:

Rustler Anhydrite	1031'	Wolfcamp	12,226'
Delaware	5156'	Strawn	14,094'
Brushy Canyon	8162'	Atoka	15,230'
Bone Spring	9144'	Morrow	15,940'

7. Possible mineral bearing formations:

Bone Spring	Oil	Atoka	Gas
Strawn	Oil	Morrow	Gas

8. Casing Program:

Hole Size	Interval	OD of Casing	Weight	Thread	Collar	Grade
25"	0-40'	20"	NA	NA	NA	Conductor
17½"	0-1080'	13 3/8"	54.5	8-R	ST&C	J-55
12½"	0-5400'	9 5/8"	43.5	8-R	LT&C	L-80
8½"	0-13,400'	7 5/8"	39	8-R	STL	P-110
6½"	13,200-16,500'	5½"	23	8-R	STL	P-110

# APPLICATION TO DRILL

PURE RESOURCES, L.P.  
MADERA "24" FEDERAL # 1  
UNIT "M" SECTION 24  
T26S-R34E LEA CO. NM

## 9. CEMENTING & CASING SETTING:

20"	Conductor	Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
13 3/8"	Surface	Set 1080' of 13 3/8" 54.5# J-55 ST&C casing. Cement with 650 Sx. of Class "C" 35/65 POZ + 6% Bentonite, + 2% CaCl, 1/2# Flocele/Sx. tail in with 250 Sx. of Class "C" cement + 2% CaCl, circulate cement to surface.
9 5/8"	Intermediate	Set 5400' of 9 5/8" 43.5# L-80 LT&C casing. Cement with 1200 Sx. of Class "C" 36/65 POZ, + 6% Bentonite, + 5% Salt, + 1/2# Flocele/Sx., tail in with 400 Sx. of Class "C" cement + 1% CaCl, circulate cement to surface.
7 5/8"	2nd Intermediate	Set 13,400' of 7 5/8" 39# P-110 STL casing. Cement in two stages with DV Tool at 7500'±. Cement 1st stage with 765 Sx. of Class "H" 50/50 POZ, + 3% LCM-1, + .4% FL-25, + 10% FL-52, + 10% Gel, + .2% R-21, tail in with 175 Sx. of Class "H" 50/50 POZ, + .6% FL-25, + idc-32, + 2% Gel. Cement 2nd stage with 865 Sx. of Class "H" 50/50 POZ, + 3% LCM-1, + .4% FL-25, + 10% FL-52, + 10% Gel, + 5% Salt, tail in with 100 Sx. of Class "H" neat cement, estimate top of cement 5200' from surface.
5 1/2"	Production Liner	Set 3300' of 5 1/2" 23# P-110 STL liner, hang liner at 13,200'. Cement with 200 Sx. of Class "H" Premium cement + additives, cement to top of liner.

10. PRESSURE CONTROL EQUIPMENT: Exhibit "E" shows a 10,000 PSI working pressure B.O.P. Consistion of SRSRRA stack the lower drilling spool is optional with outlets on lower ram. The b.o.p. will be nipped up on the 13 3/8" casing and will be tested to API specifications after each casing string is run and cemented. The B.O.P. will be operated once each 24 hour period and the blind rams will be worked when the drill pipe is out of hole. A full opening stabbing valve and upper kelly cock will be utilized. Exhibit "E-1" shows a 3" 10,000 PSI choke manifold with dual remote controled chokes. No abnormal pressures or temperatures are expected while drilling this well.

# APPLICATION TO DRILL

PURE RESOURCES, L.P.  
 MADERA "24" FEDERAL # 1  
 UNIT "M" SECTION 24  
 T26S-R34E LEA CO. NM

## 11. PROPOSED MUD CIRCULATING SYSTEM:

DEPTH	MUD WT.	VISC.	FLUID LOSS	TYPE MUD SYSTEM
40-1080'	8.4-8.7	29-34	NC	Fresh water spud mud use paper to control seepage.
1080' 5400'	10.0-10.2	29-38	NC	Brine water use paper to control seepage and high viscosity sweeps to clean hole.
5400-13,400'	9.4-9.8	29-38	NC	Cut brine use high viscosity sweeps to clean hole.
13,400-16,500'	12-15.5	34-42	6-10 cc	Use a weighted Polymer system to control water loss and weight.

Sufficient mud materials will be kept on location at all times in order to combat lost circulation, and/or unexpected kicks. If necessary to alter mud system and weights this may be accomplished at the discretion of the drilling engineer.

## 12. LOGGING, COREING, AND TESTING PROGRAM:

- A. Open hole logs: Run 1 from 13,400' to 5400' Dual Laterolog, CNL, LDT, MSFL, SONIC Gamma Ray, Caliper. Run 2 TD back to 13,400' same as above but with slim hole tools. Gamma Ray Neutron from TD to surface.
- B. Mud logger rigged up at 5400' and remain on hole to TD.
- C. No cores or DST's are planned at this time.

## 13. POTENTIAL HAZARDS:

No abnormal pressures or temperatures are expected. There is no known presence of H<sup>2</sup>S in this area. If H<sup>2</sup>S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Estimated BHP 10,000 PSI, and estimated BHT 197°.

## 14. ANTICIPATED STARTING DATE AND DURATION OF OPERATION:

Road and location construction will begin as soon as an approved APD is received. Anticipated spud date will be soon as a rig is available. Move in and drilling operations will be approximately 65 days, if production casing is run an additional 45 days will be required to complete well and construct production facilities.

## 15. OTHER FACETS OF OPERATIONS:

After production casing is run, Gamma Ray Neutron Collar logs will be run over potential pay zones. It is anticipated that the Morrow formation will be productive, this will be perforated, treated in order to establish production in the Morrow and completed as a Gas well.

## HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. All Company and Contract personnel admitted on location must be trained by a qualified H<sub>2</sub>S safety instructor to the following:
  - A. Characteristics of H<sub>2</sub>S
  - B. Physical effects and hazards
  - C. Proper use of safety equipment and life support systems.
  - D. Principle and operation of H<sub>2</sub>S detectors, warning system and briefing areas.
  - E. Evacuation procedure, routes and first aid.
  - F. Proper use of 30 minute pressure demand air pack.
2. H<sub>2</sub>S Detection and Alarm Systems
  - A. H<sub>2</sub>S detectors and audio alarm system to be located at bell nipple, end of blooie line (mud pit) and on derrick floor or doghouse.
3. Windsock and/or wind streamers
  - A. Windsock at mudpit area should be high enough to be visible.
  - B. Windsock at briefing area should be high enough to be visible.
  - C. There should be a windsock at entrance to location.
4. Condition Flags and Signs
  - A. Warning sign on access road to location.
  - B. Flags to be displayed on sign at entrance to location. Green flag, normal safe condition. Yellow flag indicates potential pressure and danger. Red flag, danger, H<sub>2</sub>S present in dangerous concentration. Only emergency personnel admitted to location.
5. Well control equipment
  - A. See exhibit "E"
6. Communication
  - A. While working under masks chalkboards will be used for communication.
  - B. Hand signals will be used where chalk board is inappropriate.
  - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephoned will be available at most drilling foreman's trailer or living quarters.
7. Drillstem Testing
  - A. Exhausts will be watered.
  - B. Flare line will be equipped with an electric ignitor or a propane pilot light in case gas reaches the surface.
  - C. If location is near any dwelling a closed D.S.T. will be performed.

## HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

8. Drilling contractor supervisor will be required to be familiar with the effects  $H_2S$  has on tubular goods and other mechanical equipment.
9. If  $H_2S$  is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with  $H_2S$  scavengers if necessary.

## SURFACE USE PLAN

PURE RESOURCES, L.P.  
MADERA "24" FEDERAL # 1  
UNIT "M" SECTION 24  
T26S-R34E LEA CO. NM

1. EXISTING ROADS & PROPOSED ROADS: Area maps; Exhibit "B" is a reproduction of a County General Hi-way Map. Exhibit "C" is a reproduction of a USGS Topographic Map, showing existing and proposed roads. All existing roads will be maintained in a condition equal to or better than current conditions. Any new roads will be constructed to BLM specifications.
  - A. Exhibit "A" shows the proposed well site as staked.
  - B. From Jal New Mexico take CR 205 South to Bennett (4± miles), continue South on Frying Pan Road 4.5 miles to Beckam Ranch Bear Right (West) go 7.5 miles on Ranch road, continue 3.2 miles on newly constructed road to location.
  - C. Exhibit "F" shows possible route of gas flowline to an existing gas line in section 25 T26S-R34E. If the Madera "24" Federal # 1 is completed as a gas well a Sundry Report will be filed requesting R-O-W for this flowline.
2. PLANNED ACCESS ROADS: Approximately 3.2 miles of new road will be constructed.
  - A. The access roads will be crowned and ditched to a 12' wide travel surface with a 40' Right-of-Way.
  - B. Gradient of all roads will be less than 5.00%.
  - C. If turn-outs are necessary they will be constructed.
  - D. If needed roads will be surfaced with a minimum of 4" of caliche. This material will be obtained from a local source.
  - E. Center-line for new roads will be flagged. Earth-work will be will be done as field conditions require.
  - F. Culverts will be placed in the access road if they are necessary. The roads will be constructed to utilize low water crossings for drainage as required by topography.
3. LOCATIONS OF EXISTING WELLS IN A ONE MILE RADIUS. EXHIBIT "A-1"
  - A. Water wells - One approximately 1.8 miles Northeast.
  - B. Disposal wells - None known
  - C. Drilling wells - None known
  - D. Producing wells - As shown on Exhibit "A-1"
  - E. Abandoned wells - As shown on Exhibit "A-1"

## SURFACE USE PLAN

PURE RESOURCES, L.P.  
MADERA "24" FEDERAL # 1  
UNIT "M" SECTION 24  
T26S-R34E LEA CO. NM

4. If on completion this well is a producer the operator will lay pipelines and construct powerlines along existing road R-O-W's or other existing R-O-W's. Possible routes of pipelines, flowlines and powerlines are shown on Exhibit "F".

5. LOCATION AND TYPE OF WATER SUPPLY:

Water will be purchased locally from a commercial source and trucked over the access roads or pipelined to location in flexible lines laid on top of the ground.

*W/ prior Sundry Notice approval.*  
750

6. SOURCE OF CONSTRUCTION MATERIAL:

If possible construction material will be obtained from the excavation of drill site, if additional material is needed it will be obtained from a local source and transported over the access roads as shown on Exhibit "C".

7. METHODS OF HANDLING WASTE MATERIAL:

- A. Drill cuttings will be disposed of in the reserve pits.
- B. All trash, junk and other waste material will be contained in trash cages or trash bins to prevent scattering. When the job is completed all contents will be removed and disposed of in a approved sanitary land fill.
- C. Salts remaining after completion of well will be picked up by the supplier, including broken sacks.
- D. Waste water from living quarters will be drained into holes with a minium of 10'. These holes will be covered during drilling and will be back filled when the well is completed. A Porto-John will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.
- E. Remaining drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry enough to be broken out for furthed drying. If the drilling fluids do not evaporate in a reasonable time they will be hauled off by transports to a state approve disposal site. Later pips will be broken out to speed drying. Water produced during completion will be put in reserve pits. Oil and condensate produced will be put in storage tanks and sold.

8. ANCILLARY FACILITIES:

- A. No camps or air strips will be constructed on location.

## SURFACE USE PLAN

PURE RESOURCES, L.P.  
MADERA "24" FEDERAL # 1  
UNIT "M" SECTION 24  
T26S-R34E LEA CO. NM

### 9. WELL SITE LAYOUT

- A. Exhibit "D" shows the proposed well site layout.
- B. This exhibit indicated proposed location of reserve and sump pits and living facilities.
- C. Mud pits in the active circulating system will be steel pits & the reserve pit is proposed to be unlined unless subsurface condition encountered during pit construction indicate that lining is needed for lateral containment of fluids.
- D. If needed, the reserve pit is to be lined with polyethelene. The pit liner will be 6 mils thick. Pit liner will extend a minimum 2'00" over the reserve pits dikes where the liner will be anchored down.
- E. The reserve pit will be fenced on three sides with four strands of barbed wire during drilling and completion phases. The fourth side will be fenced after all drilling operations have ceased. If the well is a producer, the reserve pit fence will be torn down. The reserve pit and those areas of the location not essential to production facilities will be reclaimed and seeded per BLM requirements.

### 10. PLANS FOR RESTORATION OF SURFACE

Rehabilitation of the location and reserve pit will start in a timely manner after all drilling operations cease. The type of reclamation will depend on whether the well is a producer or a dry hole.

However, in either event, the reserve pit will be allowed to dry properly, and fluid removed and disposed of in accordance with Article 7.B as previously noted. The pit area will then be leveled and contoured to conform to the original and surrounding area. Drainage systems, if any, will be reshaped to the original configuration with provisions made to alleviate erosion. These may need to be modified in certain circumstances to prevent inundation of the location's pad and surface facilities. After the area has been shaped and contoured, topsoil from the spoil pile will be placed over the disturbed area to the extent possible. Revegetation procedures will comply with BLM standards.

If the well is a dry hole, the pad and road area will be contoured to match the existing terrain. Topsoil will be spread to the extent possible. Revegetation will comply with BLM standards.

Should the well be a producer, the previously noted procedures will apply to those areas which are not required for production facilities.



SURFACE USE PLAN

PURE RESOURCES, L.P.  
MADERA "24" FEDERAL # 1  
UNIT "M" SECTION 24  
T26S-R34E LEA CO. NM

11. OTHER INFORMATION:

- A. Topography consists of low lying sand dunes with a slight dip to the West. The deep sandy soil supports shinners oak, native grasses, and mesquite trees.
- B. The surface is owned by The U.S. Department of Interior and is administered by The Bureau of Land Management. The surface is used for the grazing of livestock and the production of Oil & Gas.
- C. An archaeological survey will be conducted of the location and roads, a report will be filed with The Bureau of Land Management Carlsbad Field Office.
- D. There are no dwellings in the near vicinity of this location.

12. OPERATOR'S REPRESENTATIVES:

Before Construction:

TIERRA EXPLORATION, INC.  
P.O. BOX 2188  
HOBBS, NEW MEXICO 88241  
OFFICE Ph. 505-391-8503  
JOE T. JANICA

During and after Construction:

PURE RESOURCES, L.P.  
500 WEST ILLINOIS  
MIDLAND, TEXAS 79701  
KEN KRAWIETZ  
Ph. 432-498-2655

13. CERTIFICATION: I hereby certify that I, or persons under my direct supervision have inspected the proposed drill site and the access roads, and that I am familiar with the conditions which currently exist, that the statements made in this plan are to the best of my knowledge are true and correct, and that the work associated with the operations proposed herein will be performed by PURE RESOURCES, L.P. its contractors/subcontractors is in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provision of U.S.C. 1001 for the filing of a false report.

NAME :


DATE :


TITLE :

*Joe T Janica*  
02/26/04  
Agent





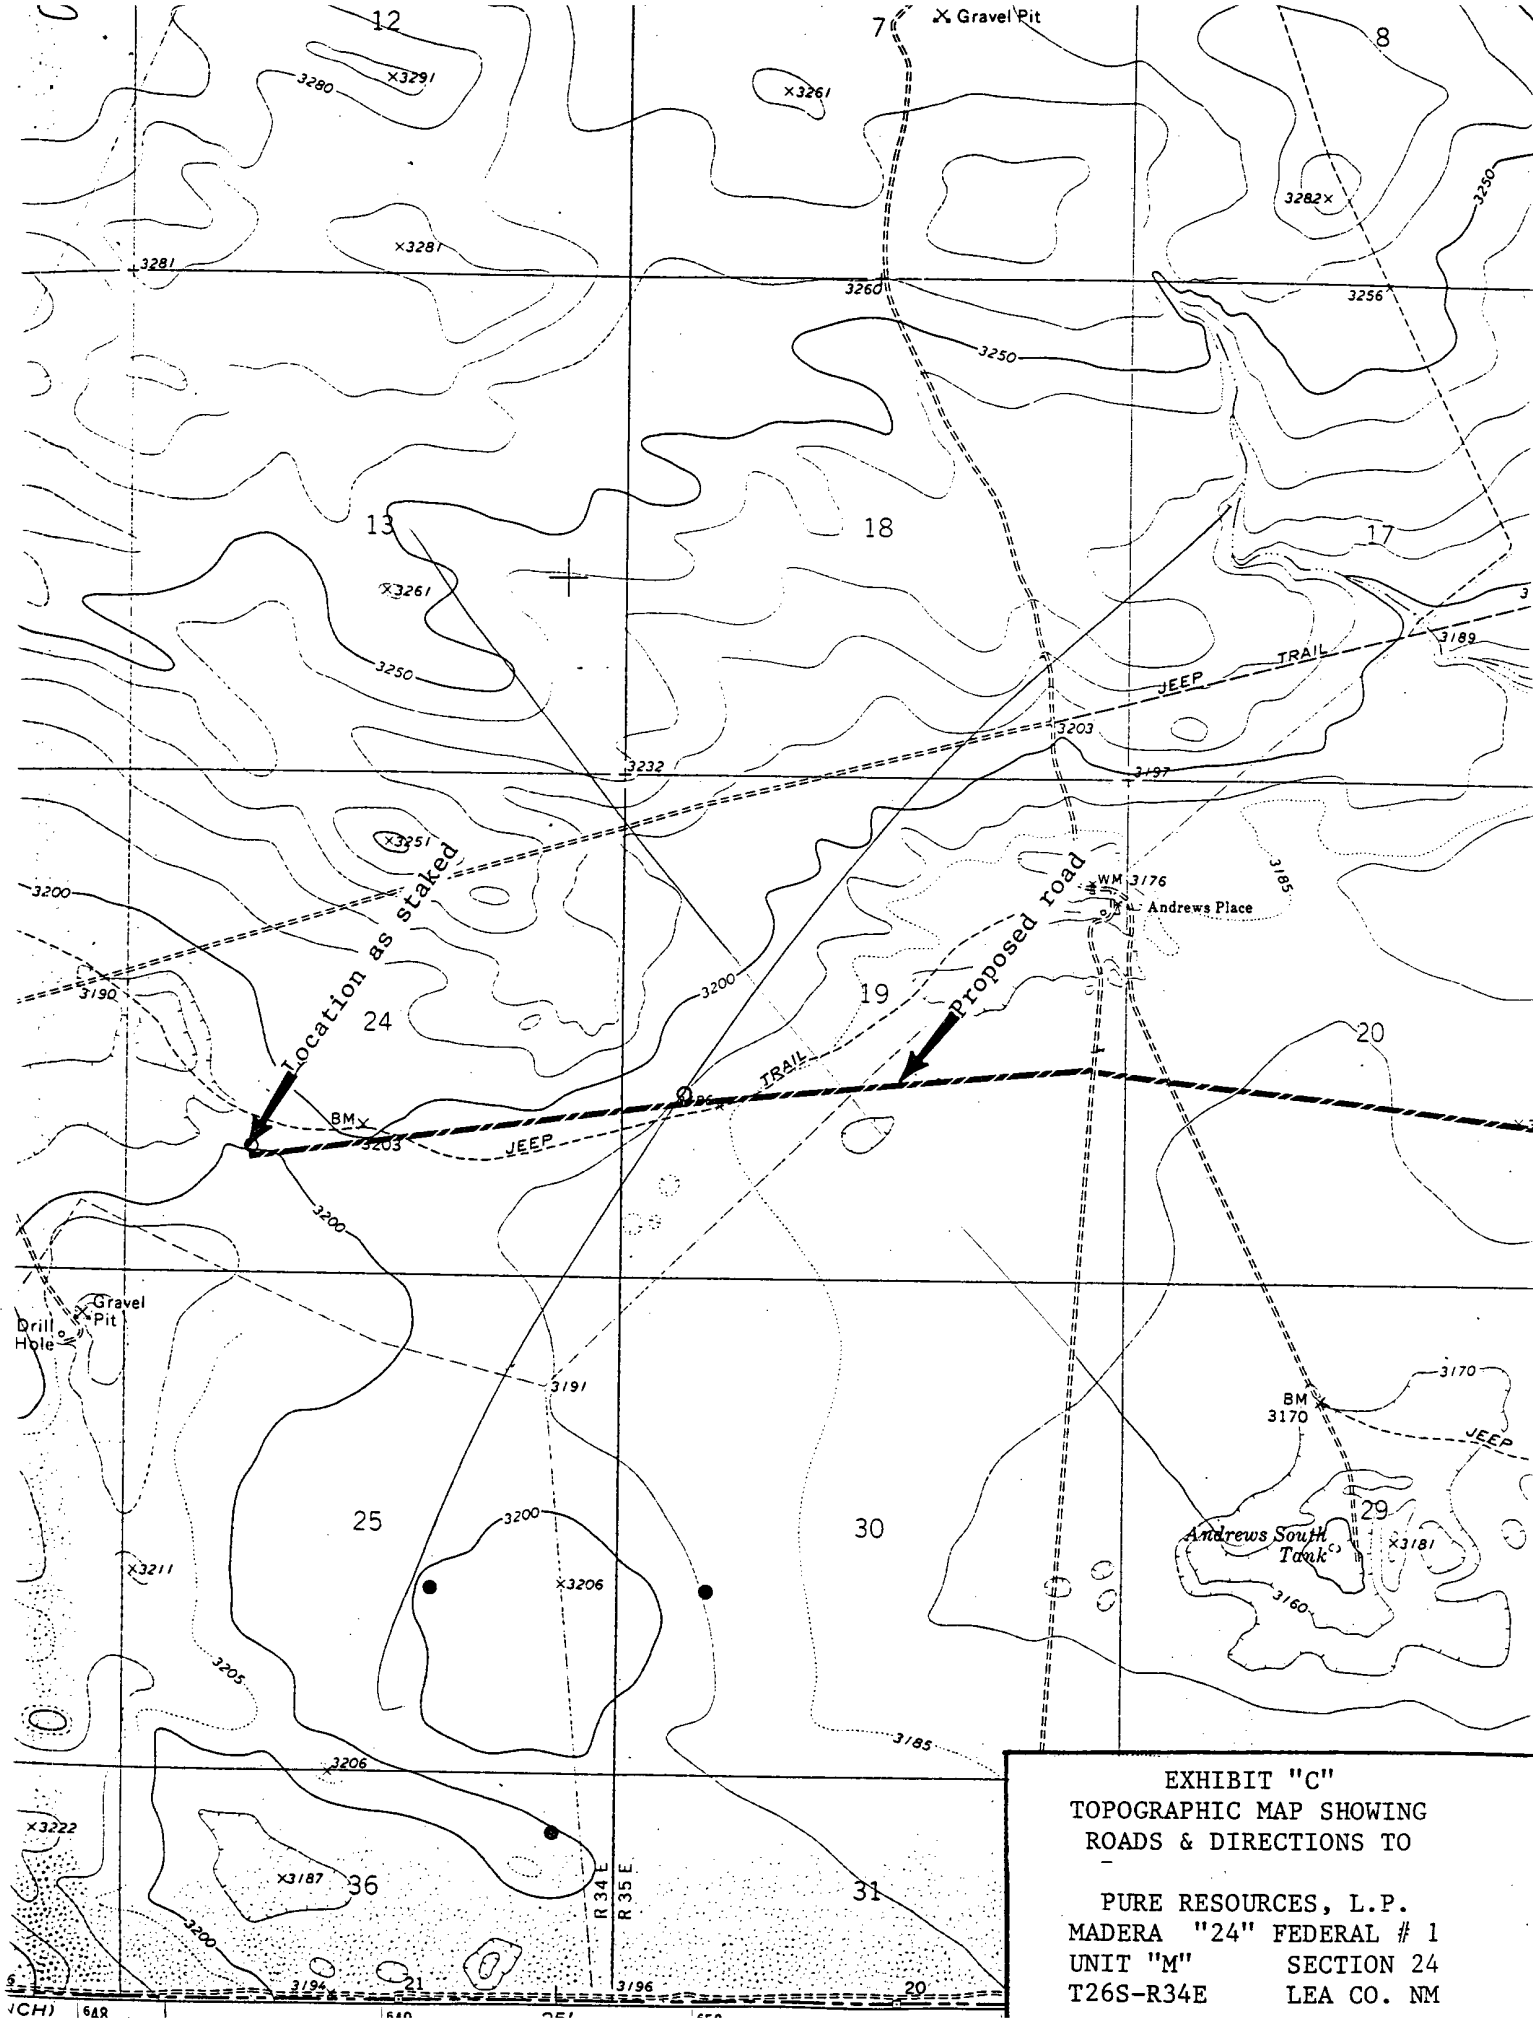

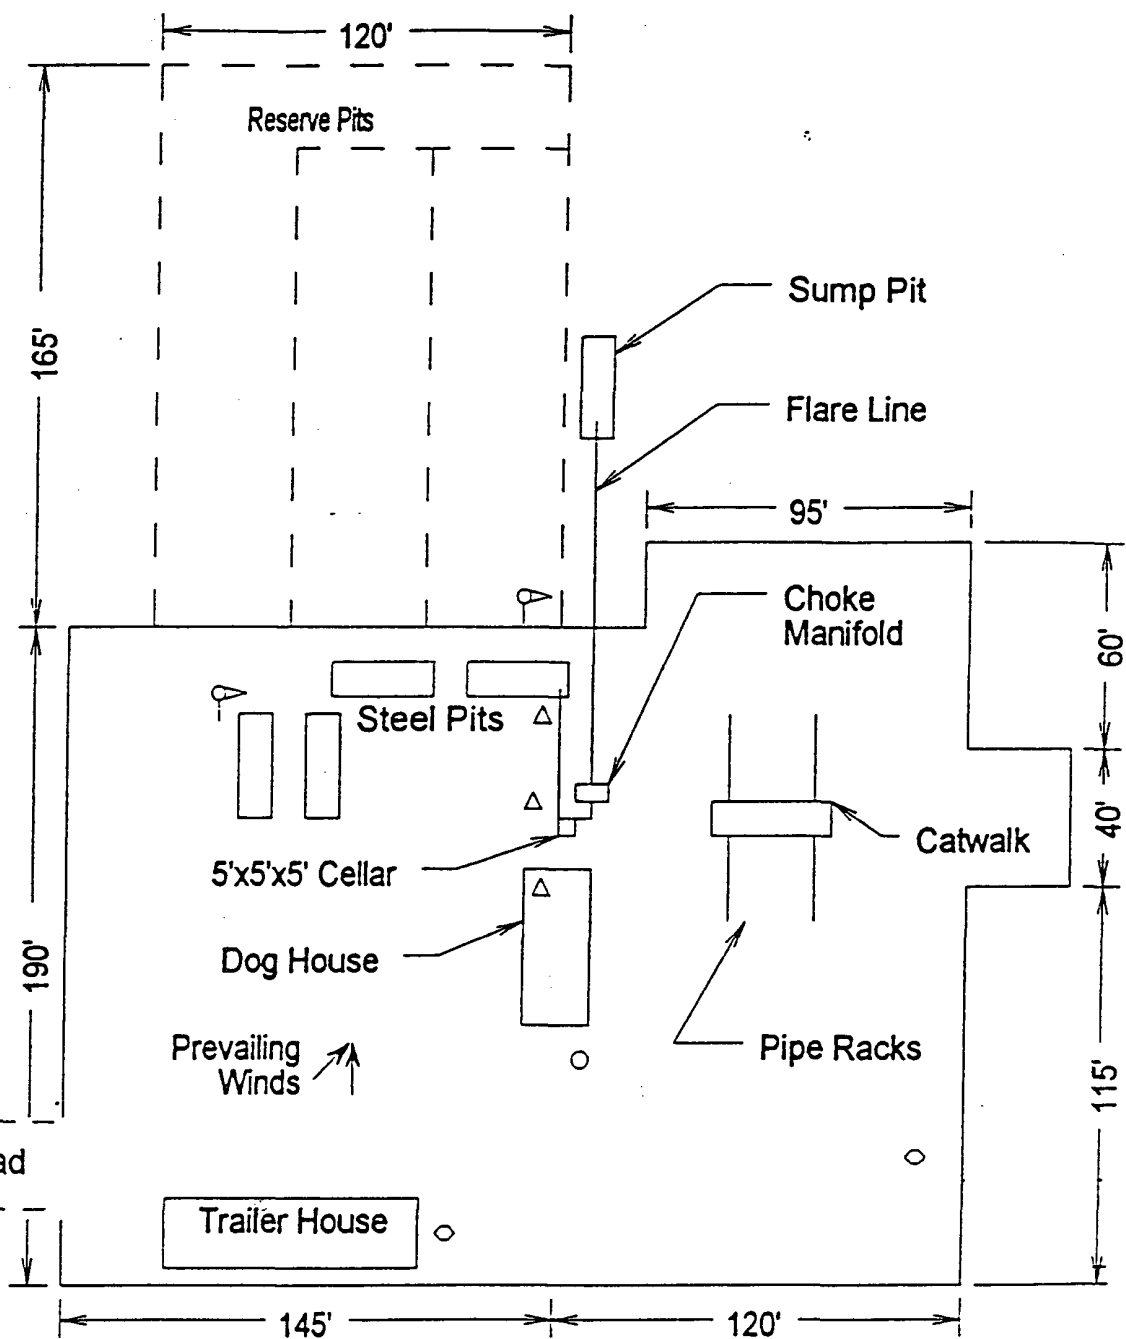

- Wind Direction Indicators (wind sock or streamers)
- △ H2S Monitors (alarms at bell nipple and shale shaker)
- Briefing Areas
- Remote BOP Closing Unit
- Sign and Condition Flags

EXHIBIT "D"  
RIG LAY OUT PLAT

PURE RESOURCES, L.P.  
MADERA "24" FEDERAL # 1  
UNIT "M" SECTION 24  
T26S-R34E LEA CO. NM

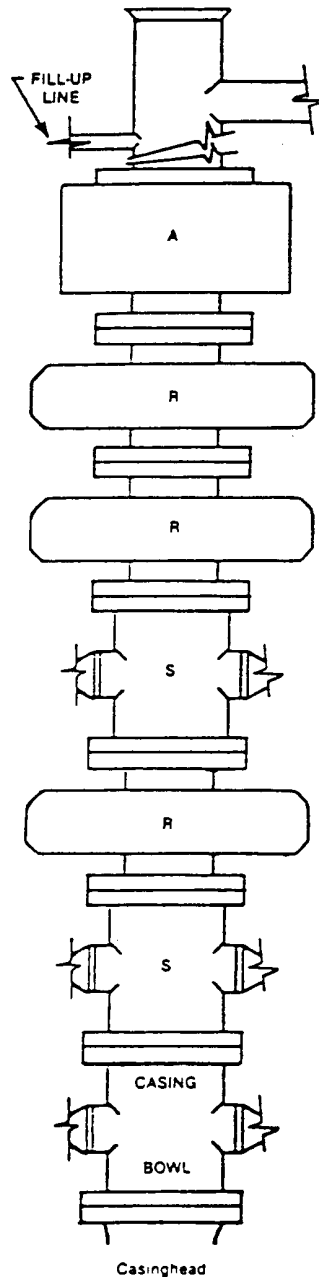


FIGURE K1-3. Recommended IADC Class 10 BOP stack arrangement SRSRRA, 10,000 psi WP. Lower drilling spool is optional with outlets on lower ram. Annular preventers 10,000 psi.

EXHIBIT "E"  
SKETCH OF B.O.P. TO BE USED ON

PURE RESOURCES, L.P.  
MADERA "24" FEDERAL # 1  
UNIT "M" SECTION 24  
T26S-R34E LEA CO. NM

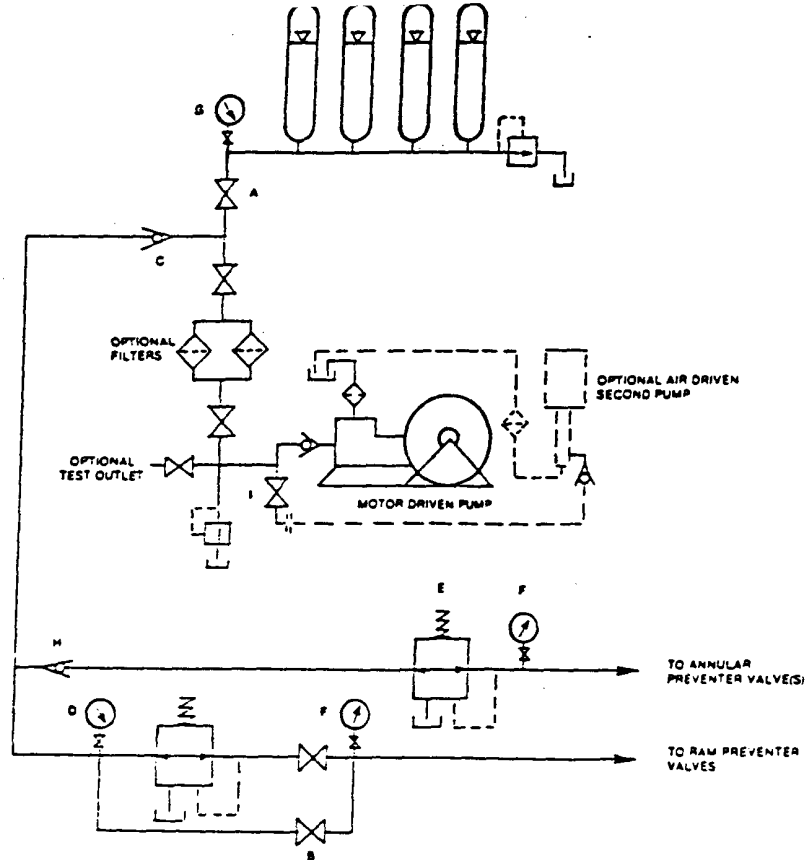


FIGURE K6-1. The schematic sketch of an accumulator system shows required and optional components.

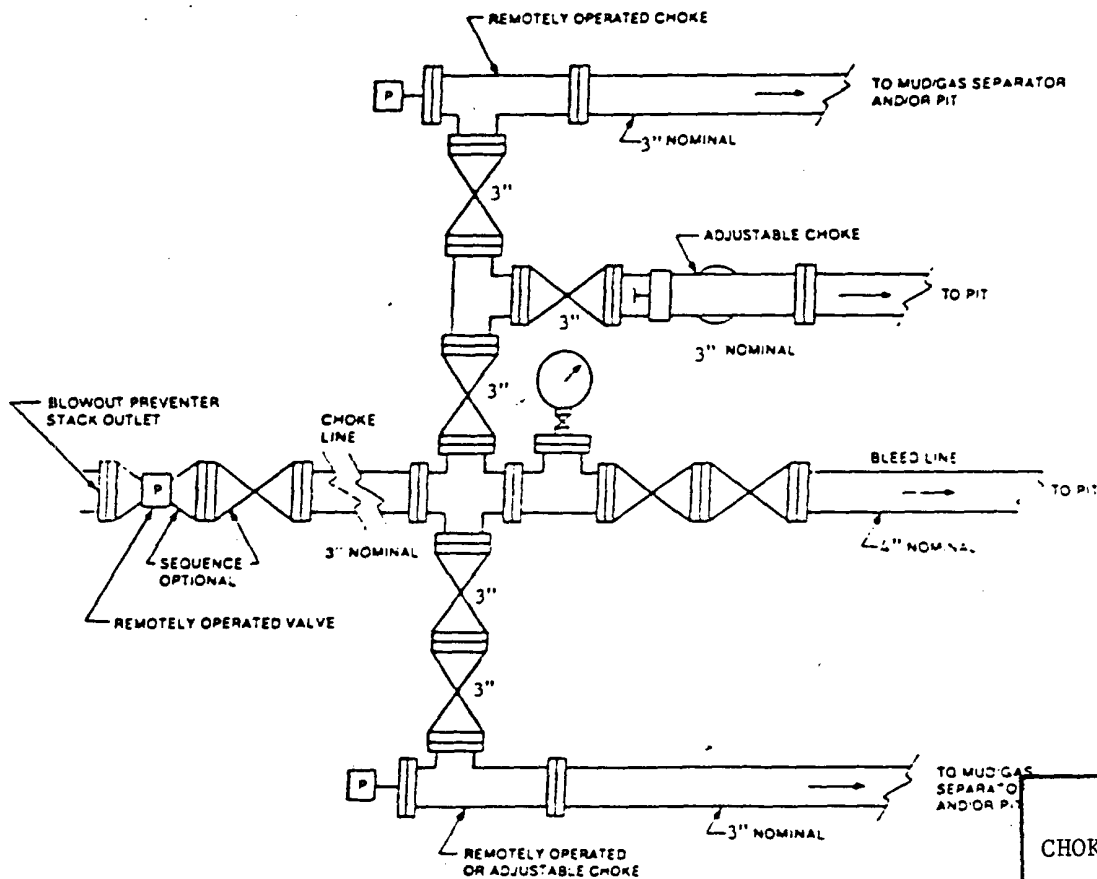


FIGURE K4-3. Typical choke manifold assembly for 10M and 15M rated working pressure service — surface installation.

EXHIBIT "E-1"  
CHOKE MANIFOLD & CLOSING UNIT

PURE RESOURCES, L.P.  
MADERA "24" FEDERAL # 1  
UNIT "M" SECTION 24  
T26S-R34E LEA CO. NM


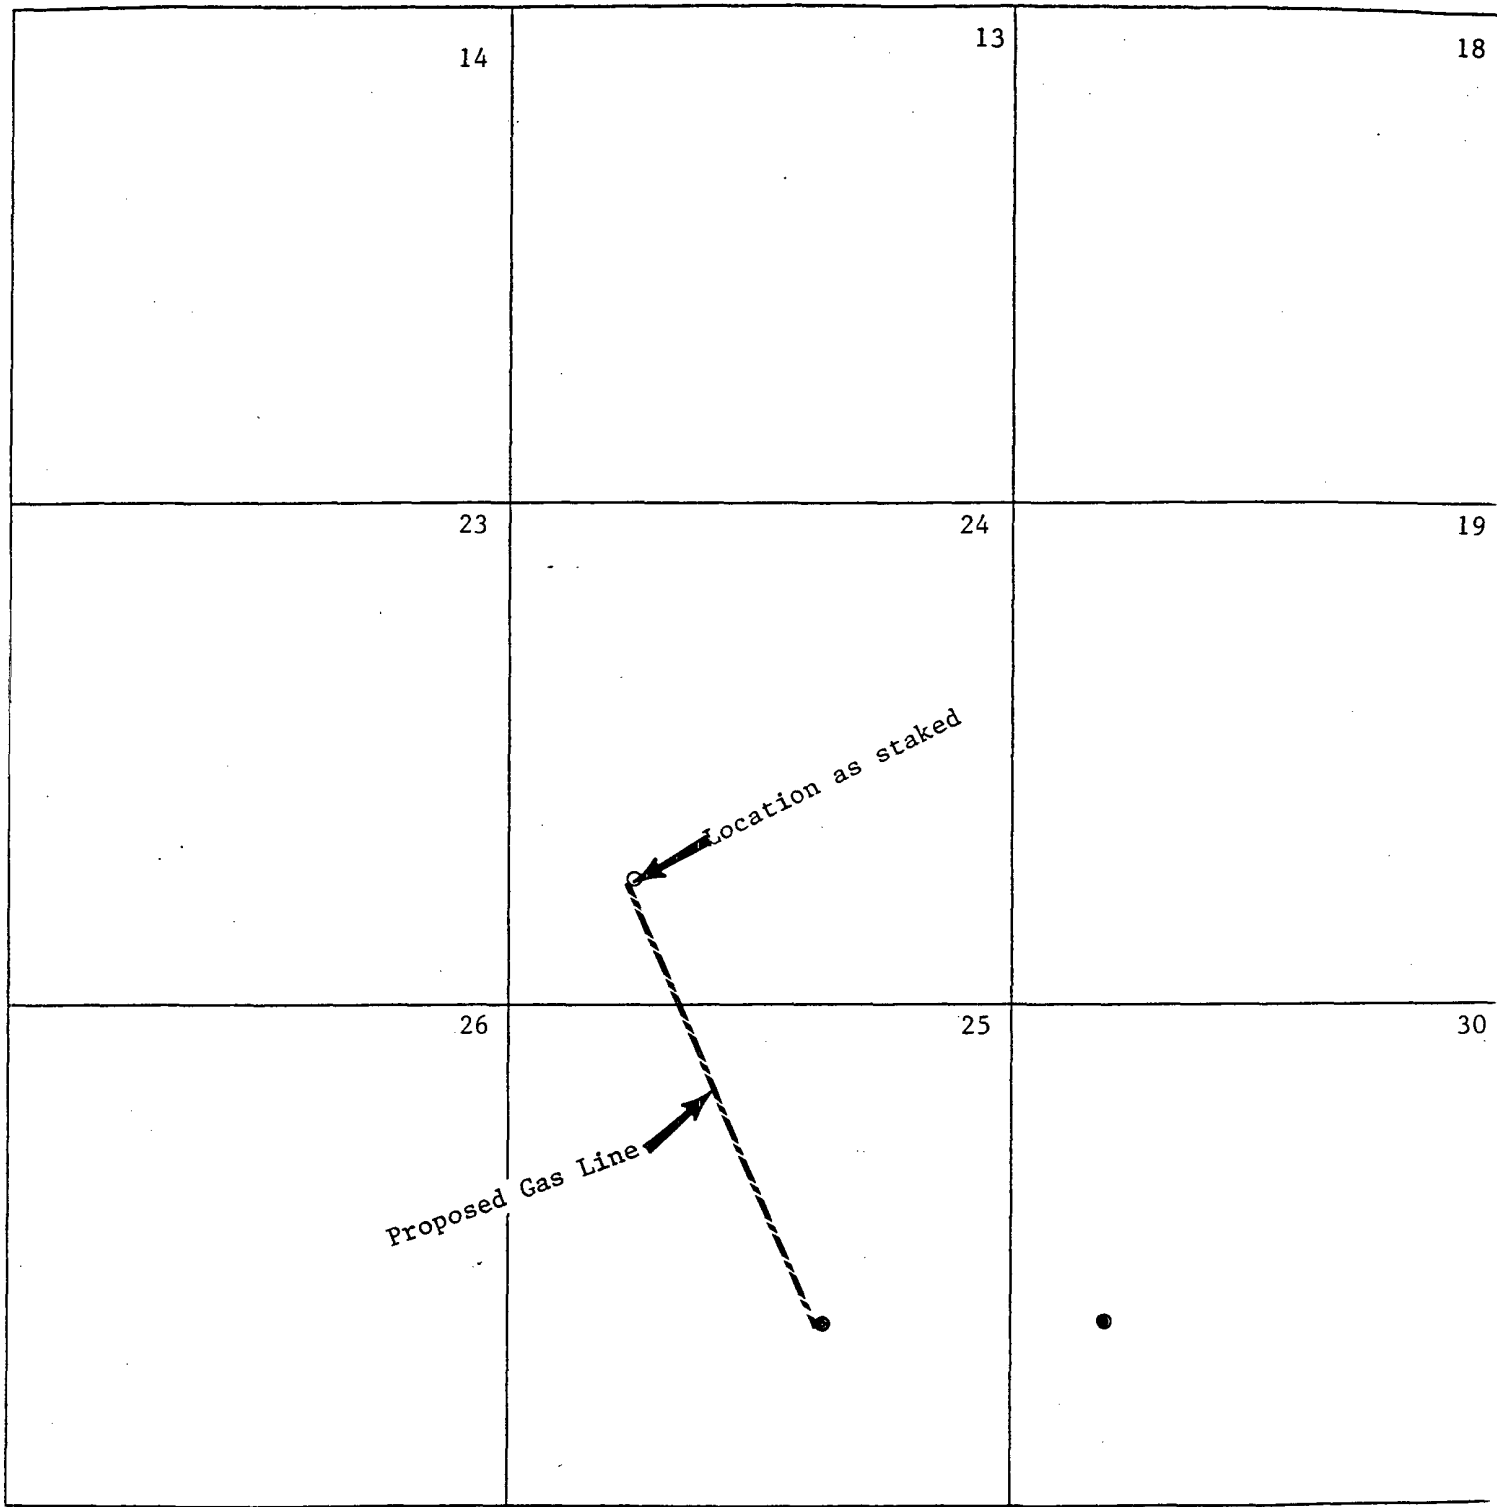


EXHIBIT "F"  
PROPOSED ROUTE  
OF GAS PIPELINE

PURE RESOURCES, L.P.  
MADERA "24" FEDERAL # 1  
UNIT "M" SECTION 24  
T26S-R34E LEA CO. NM