

State of New Mexico  
Energy, Minerals and Natural Resources Department

Form C-103  
Revised 1-1-89

FILE IN TRIPLICATE

**OIL CONSERVATION DIVISION**

DISTRICT I  
P.O. Box 1980, Hobbs, NM 88240

2040 Pacheco St.  
Santa Fe, NM 87505

DISTRICT II  
811 S. 1st Street, Artesia, NM 88210

DISTRICT III  
1000 Rio Brazos Rd, Aztec, NM 87410

WELL API NO.	30-025-07436
5. Indicate Type of Lease	FED <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name	NORTH HOBBS (G/SA) UNIT Section 29
8. Well No.	331
9. Pool name or Wildcat	HOBBS (G/SA)
10. Elevation (Show whether DF, RKB, RT GR, etc.)	3645 GL

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b> (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101 FOR SUCH PROPOSALS.)	
1. Type of Well:	Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other INJECTOR
2. Name of Operator	Occidental Permian LTD.
3. Address of Operator	1017 W. Stanolind Rd., HOBBS, NM 88240 505/397-8200
4. Well Location	Unit Letter J : 1650 Feet From The SOUTH Line and 1650 Feet From The EAST Line Section 29 Township 18S Range 38E NMPM LEA County
10. Elevation (Show whether DF, RKB, RT GR, etc.)	3645 GL

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

**NOTICE OF INTENTION TO:**

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐  
OTHER: ☐

**SUBSEQUENT REPORT OF:**

REMEDIAL WORK ☒ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ PLUG & ABANDONMENT ☐  
CASING TEST AND CEMENT JOB ☐  
OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work)  
SEE RULE 1103.

1. RUPU. Pull injection equipment.
2. Sqz San Andres perms (4100-58).
3. Drill out sqz and test to 1000 psi.
4. Re-perforate 4104-16 w/2 JSPF, 120 deg ph. (26 holes).
5. Stimulate 4104-4247 w/840 g 15% NEFE HCL acid.  
RIH w/4.5" UNI VI pkr on 127 jts 2-7/8" Duoline tbq.
6. Set pkr @ 3873'. Bottom of tbq @3873'.
7. Circ csg w/pkr fluid.
8. Test csg to 600 psi for 30 min and chart for the NMOCD.
9. RDPU. Clean Location

Rig Up Date: 07/19/2004

Rig Down Date: 07/23/2004


I hereby certify that the information above is true and complete to the best of my knowledge and belief.


SIGNATURE Robert Gilbert TITLE Workover Compl Specialist DATE 07/26/2004  
TYPE OR PRINT NAME Robert Gilbert TELEPHONE NO. 505/397-8206

(This space for State Use)

APPROVED BY Harry W. Wink TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER DATE   
CONDITIONS OF APPROVAL IF ANY:

AUG 02 2004

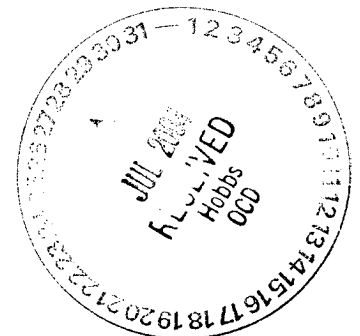

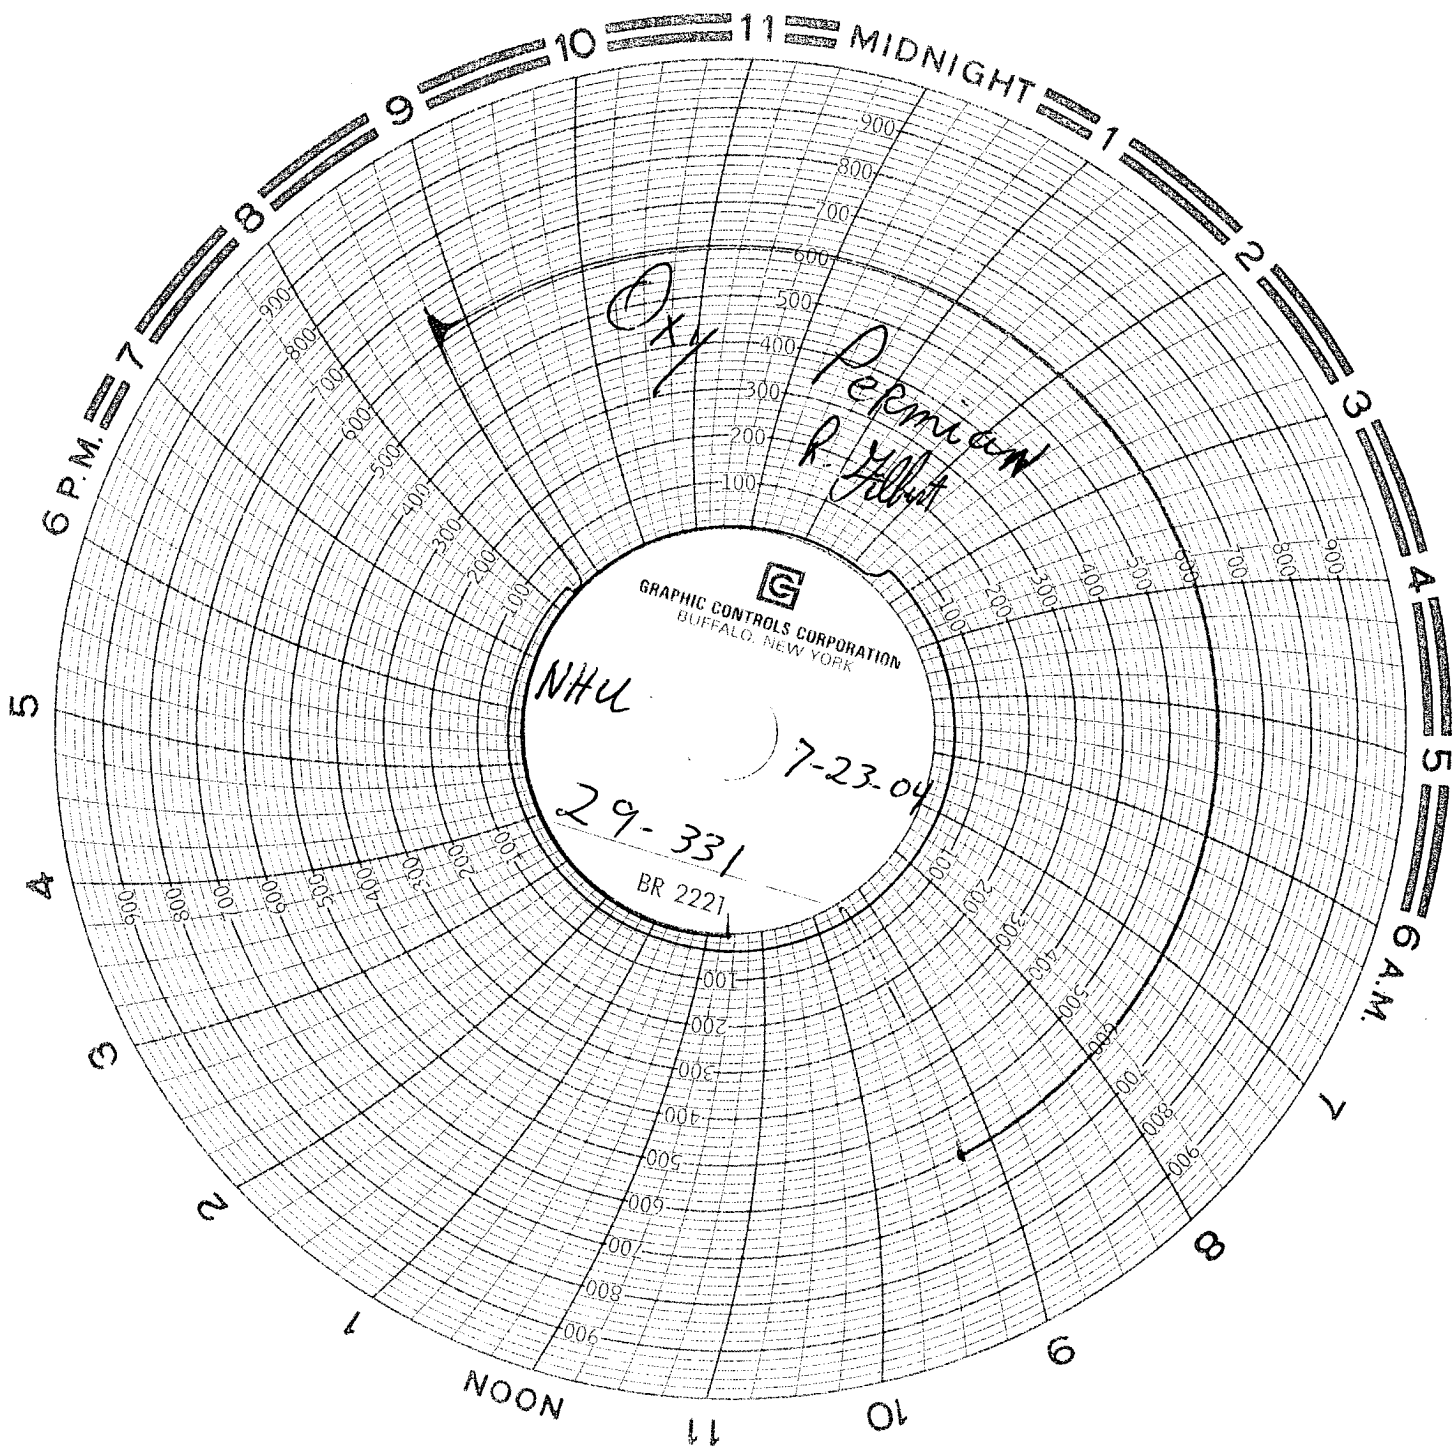

AUG 02 2004