

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30 025 24073
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. B-229
7. Lease Name or Unit Agreement Name GULF COOKIE STATE
8. Well Number 2
9. OGRID Number
10. Pool name or Wildcat JALMAT TANSIL, YATES, 7 RIVERS

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3450 DF

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type STEEL Depth to Groundwater 220 Distance from nearest fresh water well _____ Distance from nearest surface water _____

Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: ☐

SUBSEQUENT REPORT OF:


REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. SET CIBP @ 3300', WITH 10 SX CEMENT FROM 3173'-3300'.
2. PERFORATE 4 1/2" CASING @ 2790'; SQUEEZE 35 SX CEMENT FROM 2640'-2740', TAG.
3. CUT CASING @ 1457', RECOVER CASING.
4. RIH W/ TUBING TO 1497', TAG.
5. SPOT 35 SX CEMENT PLUG FROM 1397'-1497'.
6. PUH TO 270', SPOT 35 SX CEMENT FROM 170'-270'.
7. PUH TO 60'; SPOT 20 SX CEMENT FROM SURFACE TO 60'.

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.



I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Tommy Taylor TITLE AGENT DATE 9/16/2004

Type or print name TOMMY TAYLOR
For State Use Only

E-mail address: ttaylor@tetratec.com

Telephone No. 432/685-3447

APPROVED BY: Chris Williams TITLE Dist. Sup. DATE 9/21/04
Conditions of Approval (if any):


PROPOSED PLUGGING PROCEDURE FOR PLATINUM EXPLORATION, INC.

WELL: GULF COOKIE STATE 2
FIELD: JALMAT TANSIL, YATES, SEVEN RIVERS
COUNTY: LEA

1. MIRU; SPOT EQUIPMENT.
2. REMOVE TREE; SET BOP.
3. RIH W/ WORKSTRING, BIT & SCRAPER TO 3320'.
4. POOH W/ BIT & SCRAPER.
5. RIH W/ TUBING AND CIBP TO 3300'.
6. SET CIBP @ 3300', RELEASE SETTING TOOL.
7. CIRCULATE WELL W/ 55 BBLS MUD LADEN FLUID.
8. SET 10 SX CEMENT PLUG FROM 3173'-3300'.
9. POOH W/ TUBING, STAND BACK 2500'.
10. RIH W/ TUBING & PACKER TO 2500'.
11. RU WIRELINE.
12. PERFORATE 4 ½" CASING @ 2790'.
13. SQUEEZE 35 SX CEMENT FROM 2640'-2740', TAG.
14. POOH W/ TUBING.
15. RD BOP; NU 4 ½" CASING.
16. CUT CASING @ 1457', RECOVER CASING.
17. SET BOP, RIH W/ TUBING TO 1497' (TAG).
18. SPOT 35 SX CEMENT PLUG FROM 1397'-1497'; TAG & RECORD.
19. PUH TO 270'.
20. SET 35 SX CEMENT PLUG FROM 170'-270'.
21. PUH TO 60'.
22. SET 20 SX CEMENT PLUG FROM SURFACE TO 60'.
23. INSTALL DRY HOLE MARKER.
24. RDMO.

COMPANY: Hal J. Rasmussen Operating, Inc.
WELL NAME: Gulf Cookie State
WELL #: 2
API#: 30-025-24073
COUNTY: Lea

BEFORE

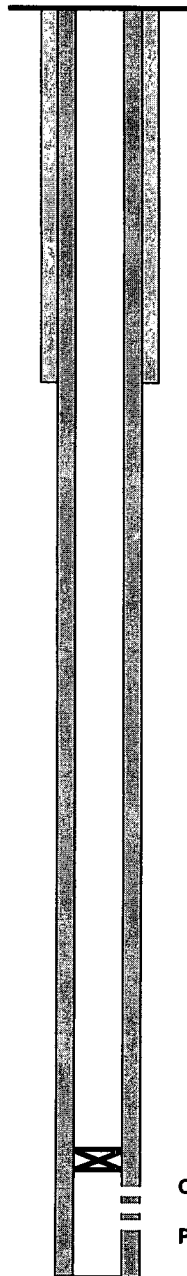

8 1/2" @ 1407', cmt'd w/ 600 sx

4 1/2" @ 3445' TOC 350'


CIBP @ 3300'

Perfs 3325'-3339'

PBTD 3346'

TD 3445'

AFTER

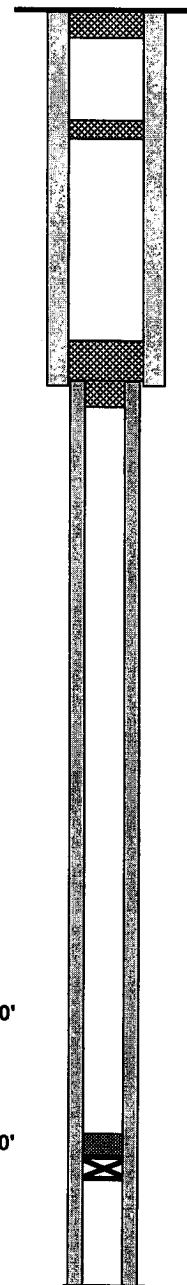

60 SX SURFACE-60'

35 SX 170'-270'

CUT CSG @ 1497', RCVR
35 SX 1397'-1497'

35 SX 2640'-2790'
PERF @ 2790'

10 SX 3173'-3300'