Submit 3 Copies To Appropriate District Office District I State of New Mexico Energy, Minerals and Natural Re	Form C-103
District I 1625 N. French Dr., Hobbs, NM 87240	WELL API NO.
District II 1301 W. Grand Ave., Artesia, NM 88210 OIL CONSERVATION DI	1
District III 1220 South St. Francis	
1000 Rio Brazos Rd., Aztec, NM 87410 Santa Fe, NM 87505	STATE X FEE
1220 S. St. Francis Dr., Santa Fe, NM 87505	6. State Oil & Gas Lease No. LG1543
SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PL DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOI PROPOSALS.)	7. Lease Name or Unit Agreement Name: State DW
1. Type of Well:	8. Well Number
Oil Well Gas Well Other SWD	4D
2. Name of Operator OXY USA WTP Limited Partnership	9. OGRID Number
3. Address of Operator	10 P 1
P.O. Box 50250 Midland, TX 79710-0250 4. Well Location	10. Pool name or Wildcat 192463 SWD Delaware
11-in 1 F 1000 No. 11	
Section 12 Township 18S Range	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4105'	
Pit or Below-grade Tank Application or Closure 5	
En type 11 surface from nearest fresh water well 1000' Distance from nearest surface water 1000'	
Pit Liner Thickness: mil Below-Grade Tank: Volume	bbls; Construction Material
12. Check Appropriate Box to Indicate Natural NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK PLUG AND ABANDON REMEDIAL WORK REME	re of Notice, Report, or Other Data SUBSEQUENT REPORT OF: EDIAL WORK ALTERING CASING
TEMPORARILY ABANDON	MENCE DRILLING OPNS. PLUG AND
	ABANDONMENT ABANDONMENT SITUATION OF THE STAND SITUATION OF THE STAND SITUATION OF THE STAND OF
OTHER:	:R:
13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.	
# COMMISSION W. CT. 1 /	CTUTE 24 G OF THE C-103 CTUTE 24 G OF THE C-103
Service and the service and th	See OF See See See See See See See See See Se
PEC ANDROVED	THE C-103
IO BE APPROVED.	15 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
See Attachment	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
	68495V86V
I hereby certify that the information above is true and complete to the best of grade tank has been/will be constructed or closed according to NMOCD critelians.	my knowledge and half of the
town according to who ch guidelines [],	general permitjor an (attached) alternative OCD-approved plan
SIGNATURE TITLE	Sr. Regulatory Analyst DATE でしまして
Type or print name David Stewart E-mail add	ress: david_stewart@oxy.com Telephone No. 432-685-5717
For State Use Only	
APPROVED BY Yarry Wink OC FIELD TITLE	REPRESENTATIVE U.S. DATE SEP 2 2
Conditions of Approval, if ary:	REPRESENTATIVE HISTAFF MANAGER
•	- AGEK

13-3/8" 48# CSG @ 350' W/ 500sx. 17-1/2" HOLE. TOC-CIRC 8-5/8" 24# CSG @ 3275' W/ 1500sx. 11" HOLE. TOC-CIRC 5-1/2" 15.5-17# CSG @ 9050' W/ 1925sx, 7-7/8" HOLE, TOC-2700'-TS

CONTRACTOR OF THE PROPERTY OF THE SECOND OF

e julius distribuis mang mga Palimakin (2009), dis

- 1. RIH & SET CIBP @ 5970', DUMP 5sx CMT TO 5935'
- 2. M&P 25sx @ 5540-5440' WOC-TAG
- 3. M&P 25sx @ 4370-4270'
- 4. M&P 25sx @ 3325-3225' WOC-TAG
- 5. PERF @ 1820', SQZ W/ 35sx TO 1720'— WOC-TAG
- 6. PERF @ 400', SQZ W/ 35sx TO 300' WOC-TAG
- 7. M&P 10sx CMT SURFACE PLUG

10# MLF between plugs

n de la companya de Notario de la companya Notario de la companya de la companya

Complete Com

OXY USA WTP LP - Proposed State DW #4 API No. 30-025-28766

10sx Surface

35sx @ 400-300' WOC-TAG

35sx @ 1820-1720'

25sx @ 3325-3225' WOC-TAG


25sx @ 4370-4270'

25sx @ 5540-5440' WOC-TAG

CIBP @ 5970' w/ 5sx

4/85-10sx @ 6745-6645'

4/85-CIBP @ 8600' w/ 10sx

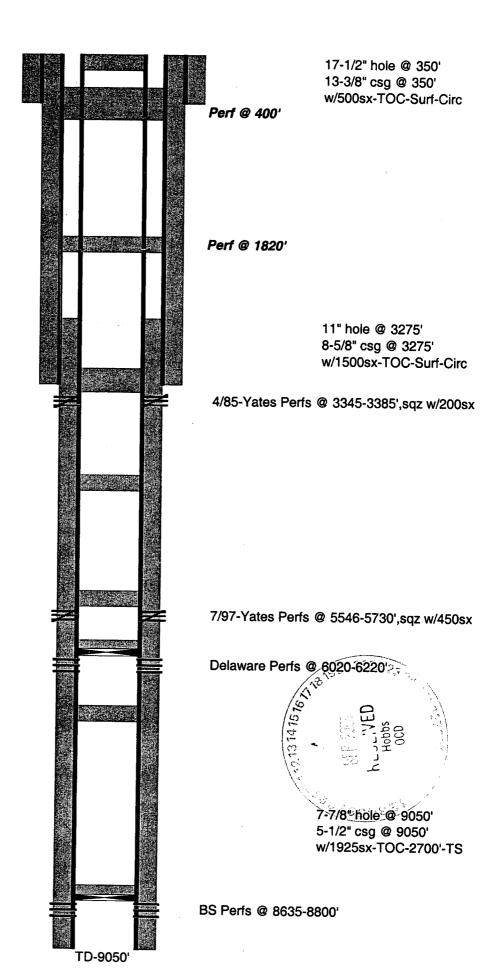

TD-9050

17-1/2" hole @ 350' 13-3/8" csg @ 350' w/500sx-TOC-Surf-Circ

11" hole @ 3275' 8-5/8" csg @ 3275' w/1500sx-TOC-Surf-Circ

4/85-Yates Perfs @ 3345-3385',sqz w/200sx

7/97-Yates Perfs @ 5546-5730',sgz w/450sx

Delaware Perfs @ 6020-6220'

7-7/8" hole @ 9050' 5-1/2" csg @ 9050' w/1925sx-TOC-2700'-TS

BS Perfs @ 8635-8800'

4/85-CIBP @ 8600' w/ 10sx

4/85-10sx @ 6745-6645'