

RESUBMITTAL

New Mexico Oil Conservation Division, District I
1625 N. French Drive
Hobbs, NM 88240

Form 3160-3
(April 2004)

FORM APPROVED
OMB No. 1004-0137
Expires March 31, 2007

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

187

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NM-2379
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator Pogo Producing Company		7. If Unit or CA Agreement, Name and No.
3a. Address P.O. Box 10340, Midland, TX		8. Lease Name and Well No. Covinton A Federal #12
3b. Phone No. (include area code) 432-685-8100		9. API Well No. 30-025-36416 37003
4. Location of Well (Report location clearly and in accordance with any State requirements*) At surface 2180' FNL & 750' FEL At proposed prod. zone same Unit A		10. Field and Pool, or Exploratory Red Tank Bone Spring
14. Distance in miles and direction from nearest town or post office* Approximately 30 miles East of Carlsbad New Mexico		11. Sec., T. R. M. or Blk. and Survey or Area Sec 25, T22S, R32E
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 330'	16. No. of acres in lease 1280	12. County or Parish Lea County
17. Spacing Unit dedicated to this well 40	18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1320'	13. State NM
19. Proposed Depth 9200	20. BLM/BIA Bond No. on file 29771	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3740' GR	22. Approximate date work will start* When Approved	23. Estimated duration

24. Attachments **Carlsbad Controlled Water Basin**

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature <i>Cathy Wright</i>	Name (Printed/Typed) Cathy Wright	Date DEC 6 2004
Title Sr Eng Tech		
Approved by (Signature) <i>Russ Sorenson</i>	Name (Printed/Typed) Russ Sorenson	Date 6 DEC 2004
Title ACTING FIELD MANAGER	Office CARLSBAD FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

APPROVAL FOR 1 YEAR

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)


OPER. OGRID NO. 17891
 PROPERTY NO. 9316
 POOL CODE 51683
 EFF. DATE _____
 API NO. 30-025-37003

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

KZ

COVINGTON A FEDERAL #12
Drilling Plan

1. Drill 25" hole to 40'. Set 40' of 20" conductor pipe and cmt to surface w/ Redi-mix.
2. Drill 14-3/4" hole to ^{1045' (1035)} 850'. Run & set 850' of 10-3/4" 32.75# H-40 ST&C csg. Cmt w/ 750 sks Cl "C" cmt + add. Circ cmt to surface.
3. Drill 9-7/8" hole to 4600'. Run & set 4600' of 7-5/8" 26.4# J-55 ST&C csg. Cmt w/ 1250 sks Cl "C" cmt + add. Circ cmt to surface.
4. Drill 6-3/4" hole to 9200'. Run & set 9200' of 4-1/2" csg as follows: 2200' of 11.6# N-80 ST&C, 6000' of 11.6# J-55 ST&C, 1000' of 11.6# N-80 LT&C csg. Cmt w/ 1425 sks Cl "H" cmt + add. Est TOC 4000' from surface.

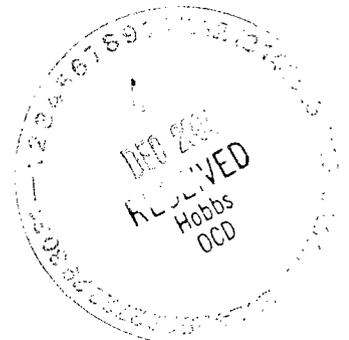

DISTRICT I
P.O. Box 140, Hobbs, NM 88241-1980

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-10:
Revised February 10, 1990
Submit to Appropriate District Office:
State Lease - 4 Copies
Fee Lease - 3 Copies

DISTRICT II
P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

DISTRICT IV
P.O. BOX 2088, SANTA FE, N.M. 87504-2088

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025-37003	Pool Code 51681	Pool Name RED TANK - BONE SPRING
Property Code 009316	Property Name COVINGTON "A" FEDERAL	Well Number 12
OGRID No. 17891	Operator Name POGO PRODUCING COMPANY	Elevation 3740

Surface Location


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	25	22 S	32 E		2180	NORTH	750	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.
-----------------------	-----------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

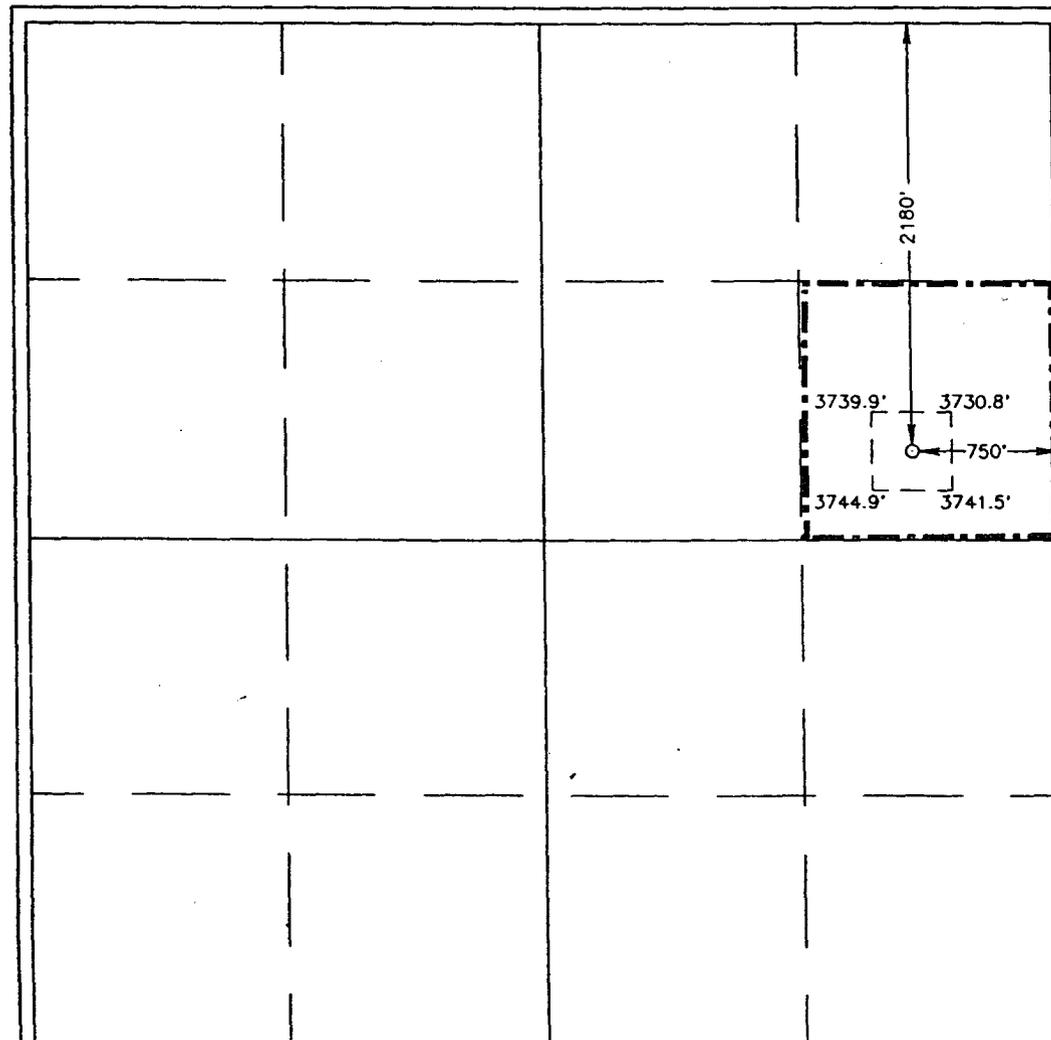

OPERATOR CERTIFICATION

I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.

Joe T. Janica
Signature

Joe T. Janica
Printed Name

Agent

Title

02/16/00
Date

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.


MAY 8, 1997

Date Surveyed DMCC

Signature of *RONALD J. EIDSON*
Professional Surveyor

Ronald J. Eidson
3239-09-9
11-0688
Certification No. JOHN W. WESSE 676
RONALD J. EIDSON 3239
PROF. SURV. EIDSON 1264

VICINITY MAP

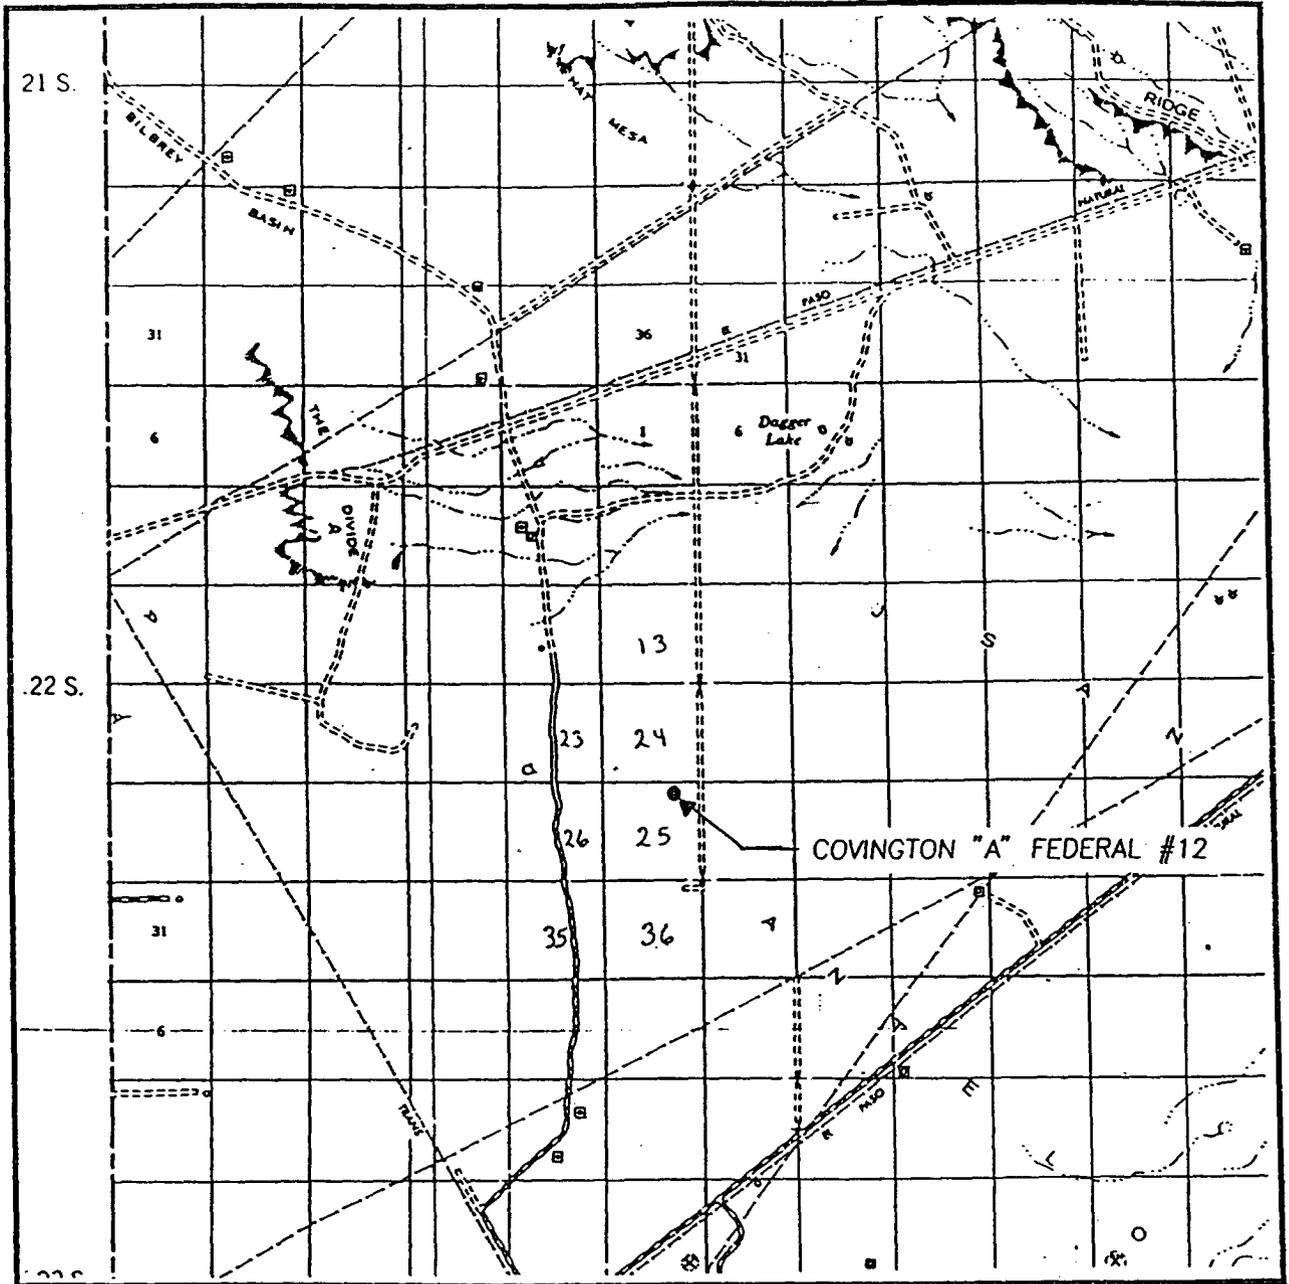

SCALE: 1" = 2 MILES

SEC. 25 TWP. 22-S RGE. 32-E

SURVEY N.M.P.M.

COUNTY LEA

DESCRIPTION 2180' FNL & 750' FEL.

ELEVATION 3740


OPERATOR POGO PRODUCING COMPANY

LEASE COVINGTON "A" FEDERAL

**JOHN WEST ENGINEERING
HOBBS, NEW MEXICO**

(505) 393-3117

LOCATION VERIFICATION MAP

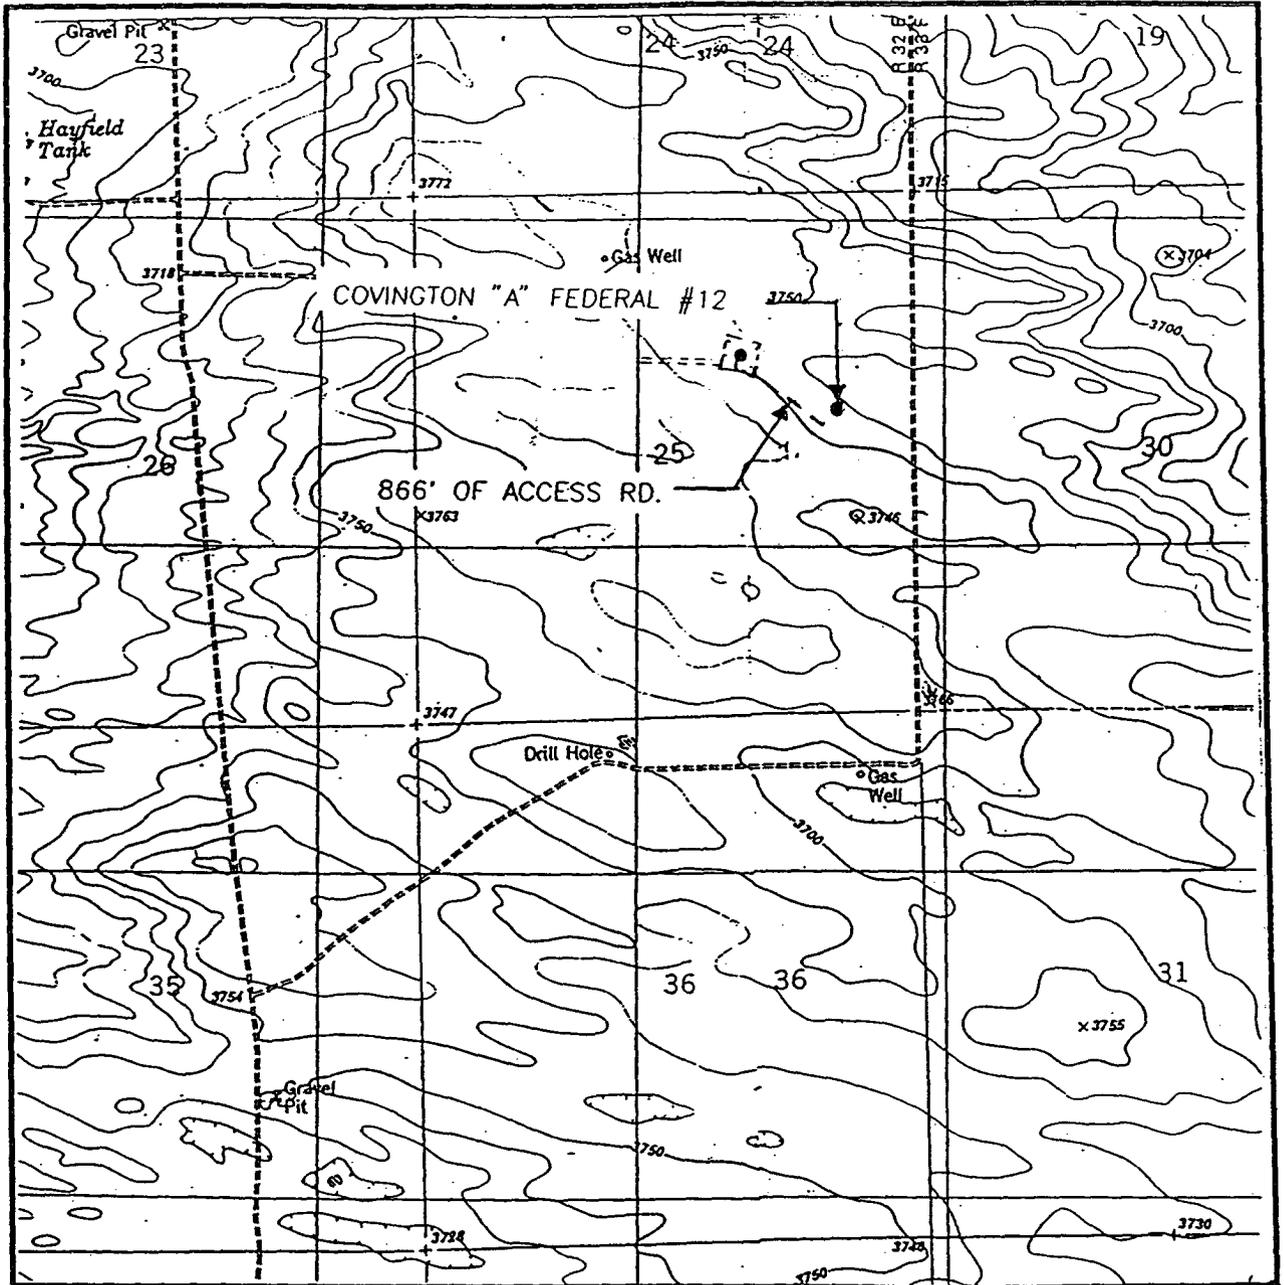

SCALE: 1" = 2000'

CONTOUR INTERVAL:
 BOOTLEG RIDGE - 10'
 TIP TOP WELLS - 10'

SEC. 25 TWP. 22-S RGE. 32-E

SURVEY N.M.P.M.

COUNTY LEA

DESCRIPTION 2180' FNL & 750' FEL

ELEVATION 3740

OPERATOR POGO PRODUCING COMPANY

LEASE COVINGTON "A" FEDERAL

U.S.G.S. TOPOGRAPHIC MAP

BOOTLEG RIDGE, TIP TOP WELLS, N.M.

**JOHN WEST ENGINEERING
 HOBBS, NEW MEXICO**

(505) 393-3117

APPLICATION TO DRILL
 POGO PRODUCING COMPANY
 COVINGTON "A" FEDERAL # 12
 UNIT "H" SECTION 25
 T22S-R32E LEA CO. NM

In response to questions asked under Section II B of Bulletin NTL-6 the following information is provided for your consideration:

1. Location: 2180' FNL & 750' FEL SEC. 25 T22S-R32E Lea Co. NM
2. Elevation above sea level: 3740' GR.
3. Geologic name of surface formation: Quaternary Aeolian Deposits.
4. Drilling tools and associated equipment: Conventional rotary drilling rig using fluid as a circulating medium for solids removal.
5. Proposed drilling depth: 9200'
6. Estimated tops of geological markers:

Rustler Anhydrite	850'	Brushy Canyon	7400'
Delaware Lime	4800'	Bone Spring	8800'
Cherry Canyon	6100'		
7. Possible mineral bearing formations:

Delaware	Oil
Bone Spring	Oil
8. Casing program:

HOLE SIZE	INTERVAL	OD CSG	WEIGHT	THREAD	COLLAR	GRADE	COND.
25"	0-40'	20"	.31 Wall	NA	NA	NA	New
14 3/4"	0-800' <i>1045' (JSS)</i>	10 3/4"	32.7	8-R	ST&C	H-40	New
9 7/8"	0-4600'	7 5/8"	26.4	8-R	ST&C	J-55 & N-80	New
6 3/4"	0-9200'	4 1/2"	11.6	8-R	LT&C	J-55 & N-80	New

APPLICATION TO DRILL

POGO PRODUCING COMPANY
 COVINGTON "A" FEDERAL # 12
 UNIT "H" SECTION 25
 T22S-R32E LEA CO. NM

9. Cementing and Setting Depth:

20" Conductor	Set 40' of 20" conductor & cement to surface with Redi-Mix.
10 3/4" Surface	Set 800' of 10 3/4" casing cement with 600 Sx. Class "C" + additives circulate to surface.
7 5/8" Intermediate	Set 4600' of 7 5/8" casing cement with 800 Sx. Halco Light + additives, tail in with 500 Sx. Premium cement C additives circulate to surface.
4 1/2" Production	Set 9200' of casing cement with 500 Sx. Halco Light + additives, tail in with 450 Sx. Premium Plus + additives Top cement 3600'.

10. Pressure Control Equipment: Exhibit "E". A Blow-out Preventer (no less than 900 series 3000 psi working pressure) consisting of double ram type preventer with bag type preventer. Units will be hydraulically operated. Exhibit "E-1" Choke Manifold and Closing Unit. Blind rams on top, pipe rams on bottom to correspond with size of drill pipe in use. BOP will be nipped up on 10 3/4" casing and remain on well until casing is run and cemented. BOP will be tested as well as choke manifold. BOP will be worked at least once each day while drilling and blind ram will be worked on trips when no drill pipe is in hole. Flow sensor PVT, full opening stabbing valve and upper kelley cock will be utilized. No pressures greater than 3700 psi anticipated.

11. Proposed Mud Circulating System:

Depth	Mud Wt.	Mud Visc.	Fluid Loss	Type Mud
0-800'	8.4-8.6	29-36	NC	Fresh water spud mud Paper to control seepage
800-4600'	10-10.6	28-30	NC	Brine water use paper for seepage and lime for pH control
4600-9200'	8.4-8.6	28-36	NC	Fresh water Use fresh water Gel for viscosity and paper for seepage control.

APPLICATION TO DRILL
POGO PRODUCING COMPANY
COVINGTON "A" FEDERAL # 12
UNIT "H" SECTION 25
T22S-R32E LEA CO. NM

12. Testing, Logging and Coring Program:

- A. Mud logger will be on hole from 4650' to TD.
- B. No cores or DST'S are planned.
- C. Open hole logs will be run, Dual Induction, Gamma Ray, Caliper, Density and CNL.

13. Potential Hazards:

No abnormal pressures or temperatures are expected. Hydrogen Sulfide gas may be encountered, H₂S detectors will be in place to detect any presence. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used. Estimated BHP 3700 PSI, estimated BHT 145° .

14. Anticipated Starting Date and Duration of Operation:

Road and location construction will begin after BLM approval of APD. Anticipated spud date as soon as approved. Drilling expected to take 20-25 days. If production casing is run an additional 30 days to complete and construct surface facility and place well on production.

15. Other Facets of Operations:

After running casing, cased hole gamma ray neutron collar logs will be run from total depth over possible pay intervals. The Bone Spring pay will be perforated and stimulated. The well will be swab tested and potentialized as an Oil well.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:
 - A. Characteristics of H₂S
 - B. Physical effects and hazards
 - C. Proper use of safety equipment and life support systems.
 - D. Principle and operation of H₂S detectors, warning system and briefing areas.
 - E. Evacuation procedure, routes and first aid.
 - F. Proper use of 30 minute pressure demand air pack.
2. H₂S Detection and Alarm Systems
 - A. H₂S detectors and audio alarm system to be located at bell nipple, end of blowie line (mud pit) and on derrick floor or doghouse.
3. Windsack and/or wind streamers
 - A. Windsack at mudpit area should be high enough to be visible.
 - B. Windsack at briefing area should be high enough to be visible.
 - C. There should be a windsack at entrance to location.
4. Condition Flags and Signs
 - A. Warning sign on access road to location.
 - B. Flags to be displayed on sign at entrance to location. Green flag, normal safe condition. Yellow flag indicates potential pressure and danger. Red flag, danger, H₂S present in dangerous concentration. Only emergency personnel admitted to location.
5. Well control equipment
 - A. See exhibit "E"
6. Communication
 - A. While working under masks chalkboards will be used for communication.
 - B. Hand signals will be used where chalk board is inappropriate.
 - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.
7. Drillstem Testing
 - A. Exhausts will be watered.
 - B. Flare line will be equipped with an electric ignitor or a propane pilot light in case gas reaches the surface.
 - C. If the location is near to a dwelling a closed DST will be performed.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

8. Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubular goods and other mechanical equipment.
9. If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary.

SURFACE USE PLAN

POGO PRODUCING COMPANY
COVINGTON "A" FEDERAL # 12
UNIT "H" SECTION 25
T22S-R32E LEA CO. NM

1. EXISTING ROADS. Area map, Exhibit "B" is a reproduction of the New Mexico General Hi-way Co. Map. Exhibit "C" is a reproduction of a topographic map. Existing roads and proposed roads are shown on each exhibit. All roads will be maintained in a condition equal to or better than of construction.
 - A. Exhibit "A" shows the proposed development well as staked.
 - B. From Hobbs NM take U.S.Hi-way 62-180 toward Carlsbad NM, go 38 miles to Co. road C-29, turn South go 14 mi to Mills Ranch Road turn East follow this road 7.2 mi, turn South go 1.3 mi turn East go .8 miles turn South go .2 miles turn Left (Northeast) go .35 miles, turn Right (Southeast) go .2 miles to location.
 - C. Construct a powerline from location along road to existing powerline
 - D. Lay a pipeline along road & existing ROW to tank battery located at well #

2. PLANNED ACCESS ROADS: Approximately .2 mile of new road will be constructed.
 - A. The access road will be crowned and ditched to a 12'00" wide travel surface with 40' right-of-way.
 - B. Gradient on all roads will be less than 5.00%.
 - C. No turnouts will be necessary.
 - D. If needed, road will be surfaced with a minimum of 4" of caliche. This material will be obtained from a local source.
 - E. Centerline for the new access road has been flagged. Earthwork will be as required by field conditions.
 - F. Culverts in the access road will not be used. The road will be constructed to utilize low water crossings for drainage as required by the topography.

3. LOCATION OF EXISTING WELLS IN A ONE-MILE RADIUS EXHIBIT "A-1"
 - A. Water wells - None known
 - B. Disposal wells - None known
 - C. Drilling wells - None known
 - D. Producing wells - As shown on Exhibit "A-1"
 - E. Abandoned wells - As shown on Exhibit "A-1"

SURFACE USE PLAN

POGO PRODUCING COMPANY
COVINGTON "A" FEDERAL # 12
UNIT "H" SECTION 25
T22S-R32E LEA CO. NM

4. If, upon completion, the well is a producer, Pogo Producing Company will furnish maps or plats showing On Well Pad facilities and Off Well Pad facilities (if needed) on a Sundry Notice before construction of these facilities starts.

5. LOCATION AND TYPE OF WATER SUPPLY

Water will be purchased locally from a commercial source and trucked over the access roads or piped in flexible lines laid on top of the ground.

6. SOURCE OF CONSTRUCTION MATERIALS

If needed, construction materials will be obtained from the drill site's excavations or from a local source. These materials will be transported over the access route as shown on Exhibit "C".

7. METHODS FOR HANDLING WASTE DISPOSAL

- A.
1. Drill cuttings will be disposed of in the reserve pit.
 2. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed all contents will be removed and deposited in an approved sanitary landfill.
 3. Salts remaining after completion of the well will be picked up by the supplier, including broken sacks.
 4. Sewage from trailer houses will drain into holes with minimum depth of 10'00". These holes will be covered during drilling and backfilled upon completion. A "porta John" will be provided for the rig crews. This will be properly maintained during the drilling operations and removed upon completion of the well.
- B.
- Remaining drilling fluids will be allowed to evaporate in the reserve pit until the pit is dry enough for backfilling. In the event drilling fluids will not evaporate in a reasonable period of time they will be transported by tank truck to a state approved disposal site. Pits will then be broken out to speed drying.

Water produced during testing of the well will be disposed of in the reserve pit. Oil produced during testing of the well will be stored in test tanks until sold and hauled from the site.

8. ANCILLARY FACILITIES

No camps or airstrips will be constructed.

SURFACE USE PLAN

POGO PRODUCING COMPANY
COVINGTON "A" FEDERAL # 12
UNIT "H" SECTION 25
T22S-R32E LEA CO. NM

9. WELL SITE LAYOUT

- A. Exhibit "D" shows the proposed well site layout.
- B. This exhibit indicated proposed location of reserve and sump pits and living facilities.
- C. Mud pits in the active circulating system will be steel pits and the reserve pit is proposed to be unlined, unless subsurface condition encountered during pit construction indicate that lining is needed for lateral containment of fluids.
- D. If needed, the reserve pit is to be lined with polyethylene. The pit liner will be 6 mils thick. Pit liner will extend a minimum 2'00" over the reserve pits dikes where the liner will be anchored down.
- E. The reserve pit will be fenced on three sides with four strands of barbed wire during drilling and completion phases. The fourth side will be fenced after all drilling operations have ceased. If the well is a producer, the reserve pit fence will be torn down. The reserve pit and those areas of the location not essential to production facilities will be reclaimed and seeded per BLM requirements.

10. PLANS FOR RESTORATION OF SURFACE

Rehabilitation of the location and reserve pit will start in a timely manner after all drilling operations cease. The type of reclamation will depend on whether the well is a producer or a dry hole.

However, in either event, the reserve pit will be allowed to dry properly, and fluid removed and disposed of in accordance with Article 7.B as previously noted. The pit area will then be leveled and contoured to conform to the original and surrounding area. Drainage systems, if any, will be reshaped to the original configuration with provisions made to alleviate erosion. These may need to be modified in certain circumstances to prevent inundation of the location's pad and surface facilities. After the area has been shaped and contoured, topsoil from the spoil pile will be placed over the disturbed area to the extent possible. Revegetation procedures will comply with BLM standards.

If the well is a dry hole, the pad and road area will be contoured to match the existing terrain. Topsoil will be spread to the extent possible. Revegetation will comply with BLM standards.

Should the well be a producer, the previously noted procedures will apply to those areas which are not required for production facilities.

SURFACE USE PLAN

POGO PRODUCING COMPANY
COVINGTON "A" FEDERAL # 12
UNIT "H" SECTION 25
T22S-R32E LEA CO. NM

11. OTHER INFORMATION:

- A. Topography consists of sand dunes with a slight dip toward the West. Deep sandy soil supports native grasses, mesquite, and shinnery Oak.
- B. Surface is owned by the Bureau of Land Management U.S. Department of Interior. Surface is used for grazing of livestock and is leased to ranchers for this purpose.
- C. An Archaeological survey has been made of this location and road and a copy is attached.
- D. There are no dwellings or habitation within three miles of this location.

12. OPERATORS REPRESENTATIVE:

Before construction:

TIERRA EXPLORATION INC.
P.O. BOX 2188
HOBBS, NEW MEXICO 88241
OFFICE PHONE 505-392-2112
JOE T. JANICA

During and after construction:


POGO PRODUCING COMPANY
P.O. BOX 10340
MIDLAND, TEXAS 79702-7340
OFFICE PHONE 915-685-8100
MR. RICHARD WRIGHT 915-685-8140

13. CERTIFICATION: - I hereby certify that I, or persons under my direct supervision have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Pogo Producing company, its contractors/subcontractors is in the conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provision of U.S.C. 1001 for the filing of a false statement.

NAME : Joe T. Janica

DATE : 02/16/00

TITLE : Agent

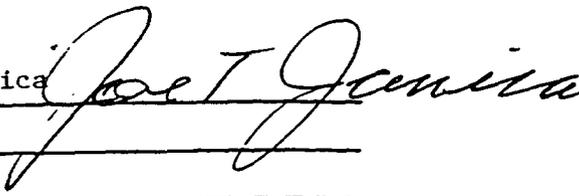

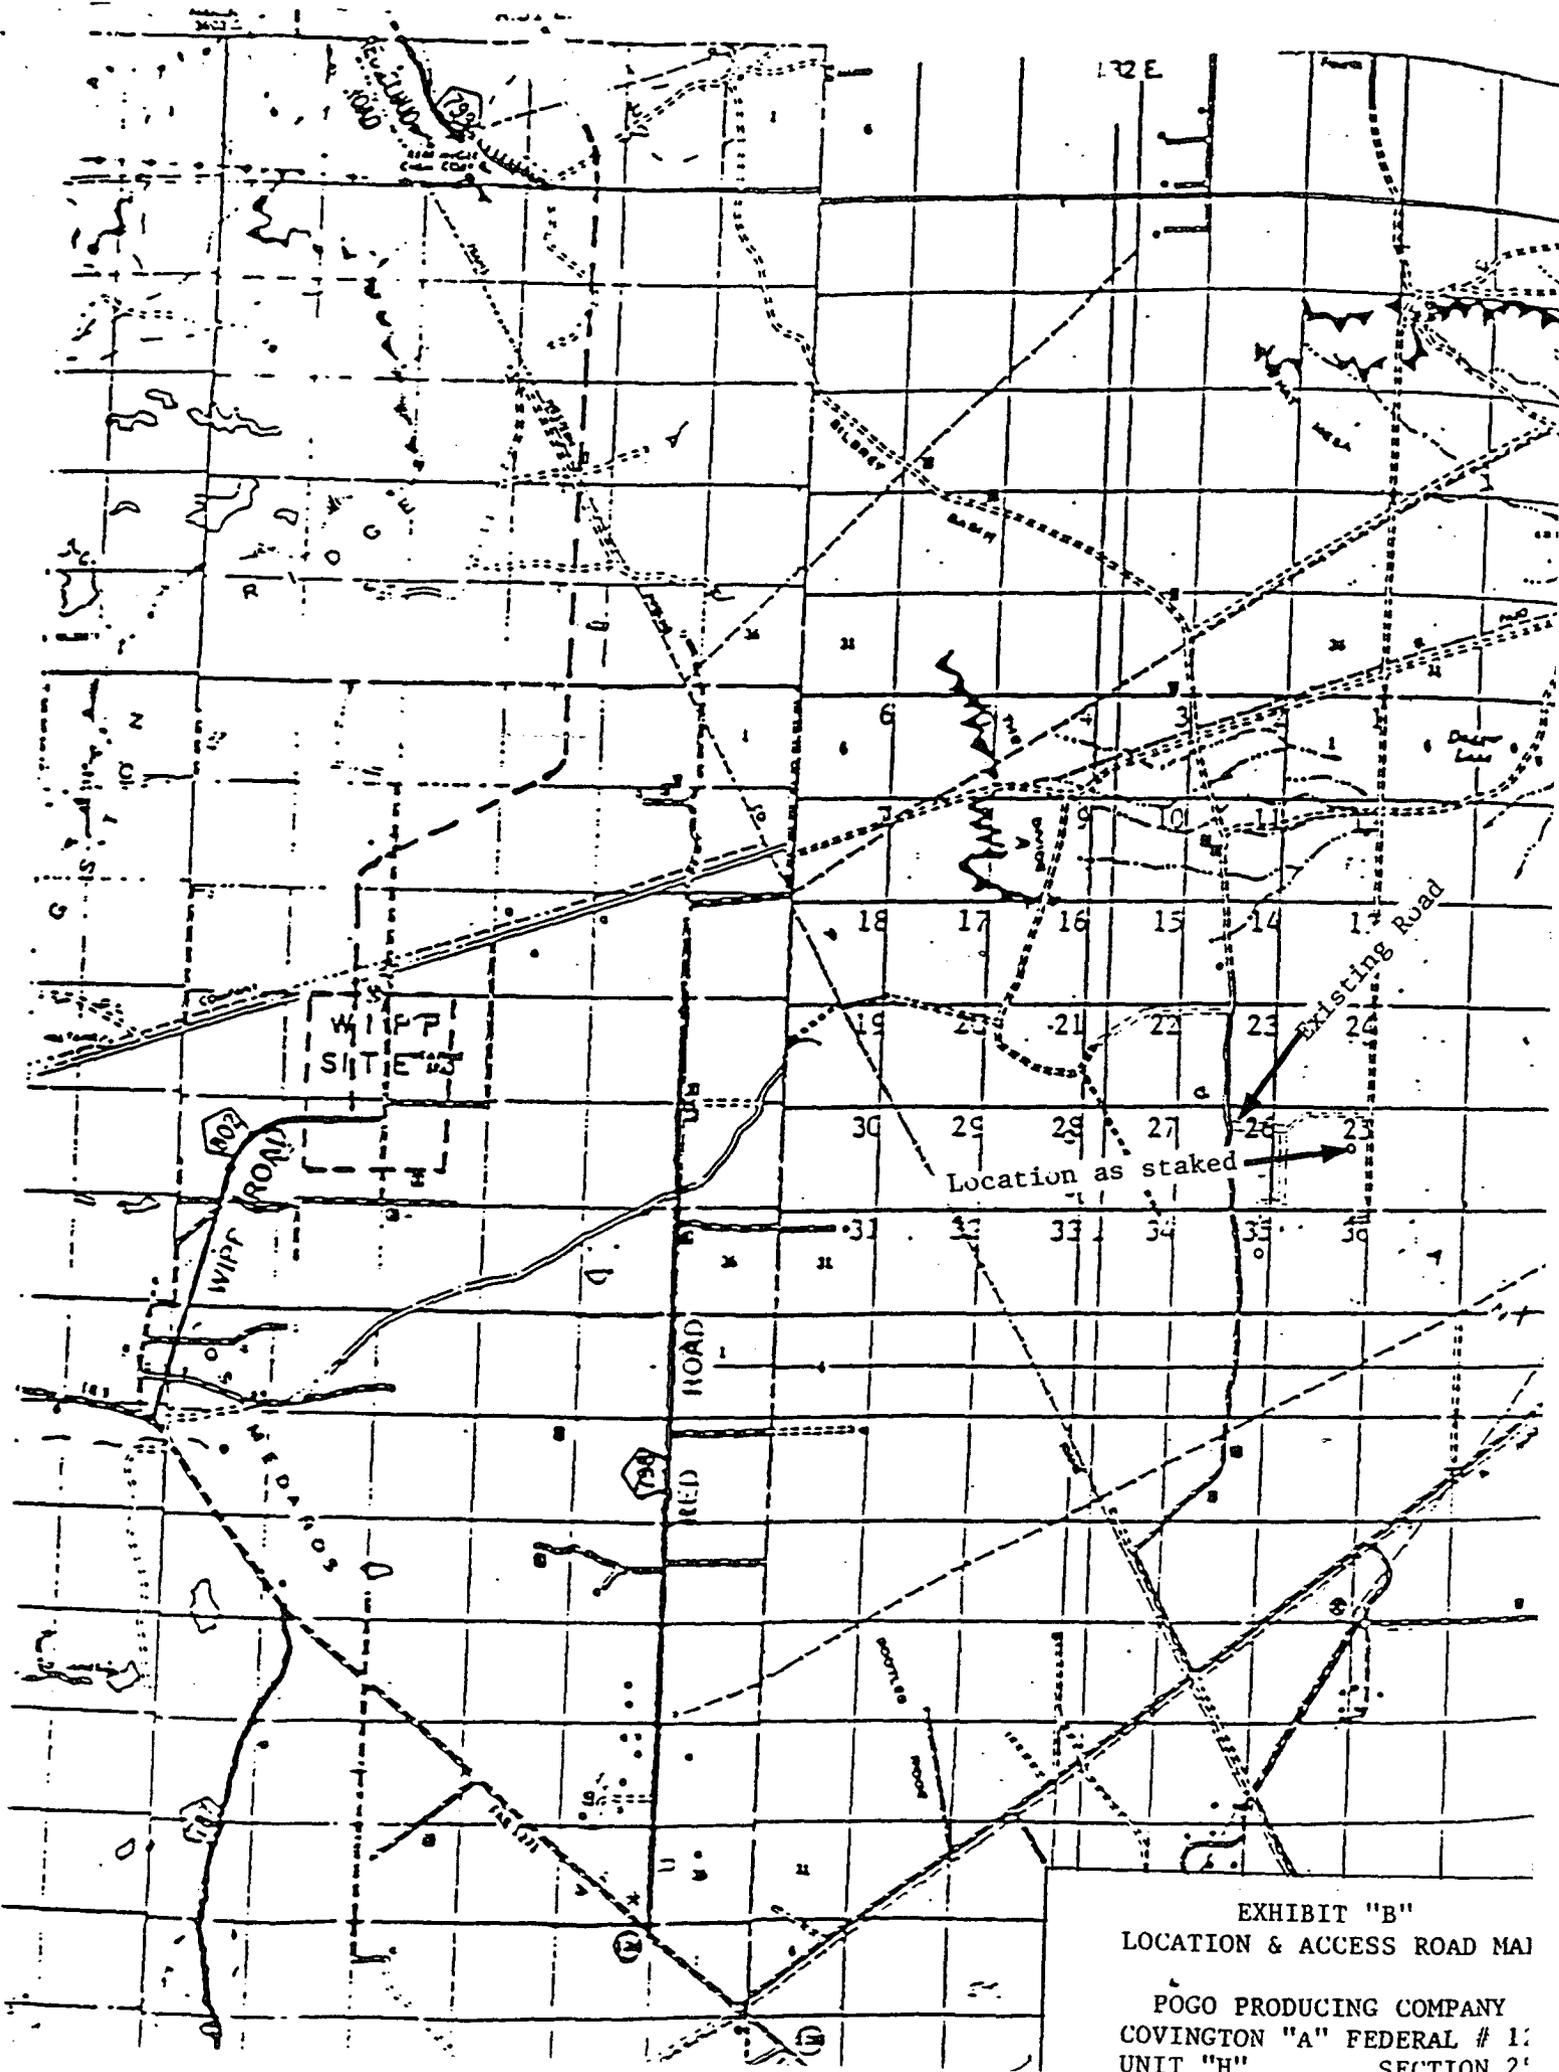


EXHIBIT "B"
 LOCATION & ACCESS ROAD MAI
 POGO PRODUCING COMPANY
 COVINGTON "A" FEDERAL # 17
 UNIT "H" SECTION 25

BOOTLEG RIDGE QUADRANGLE
NEW MEXICO

7.5 MINUTE SERIES (TOPOGRAPHIC) DEPARTMENT OF GEOLOGIC

SW 1/4 HAT MESA 15' QUADRANGLE

UNITED STATES GEOLOGIC SURVEY


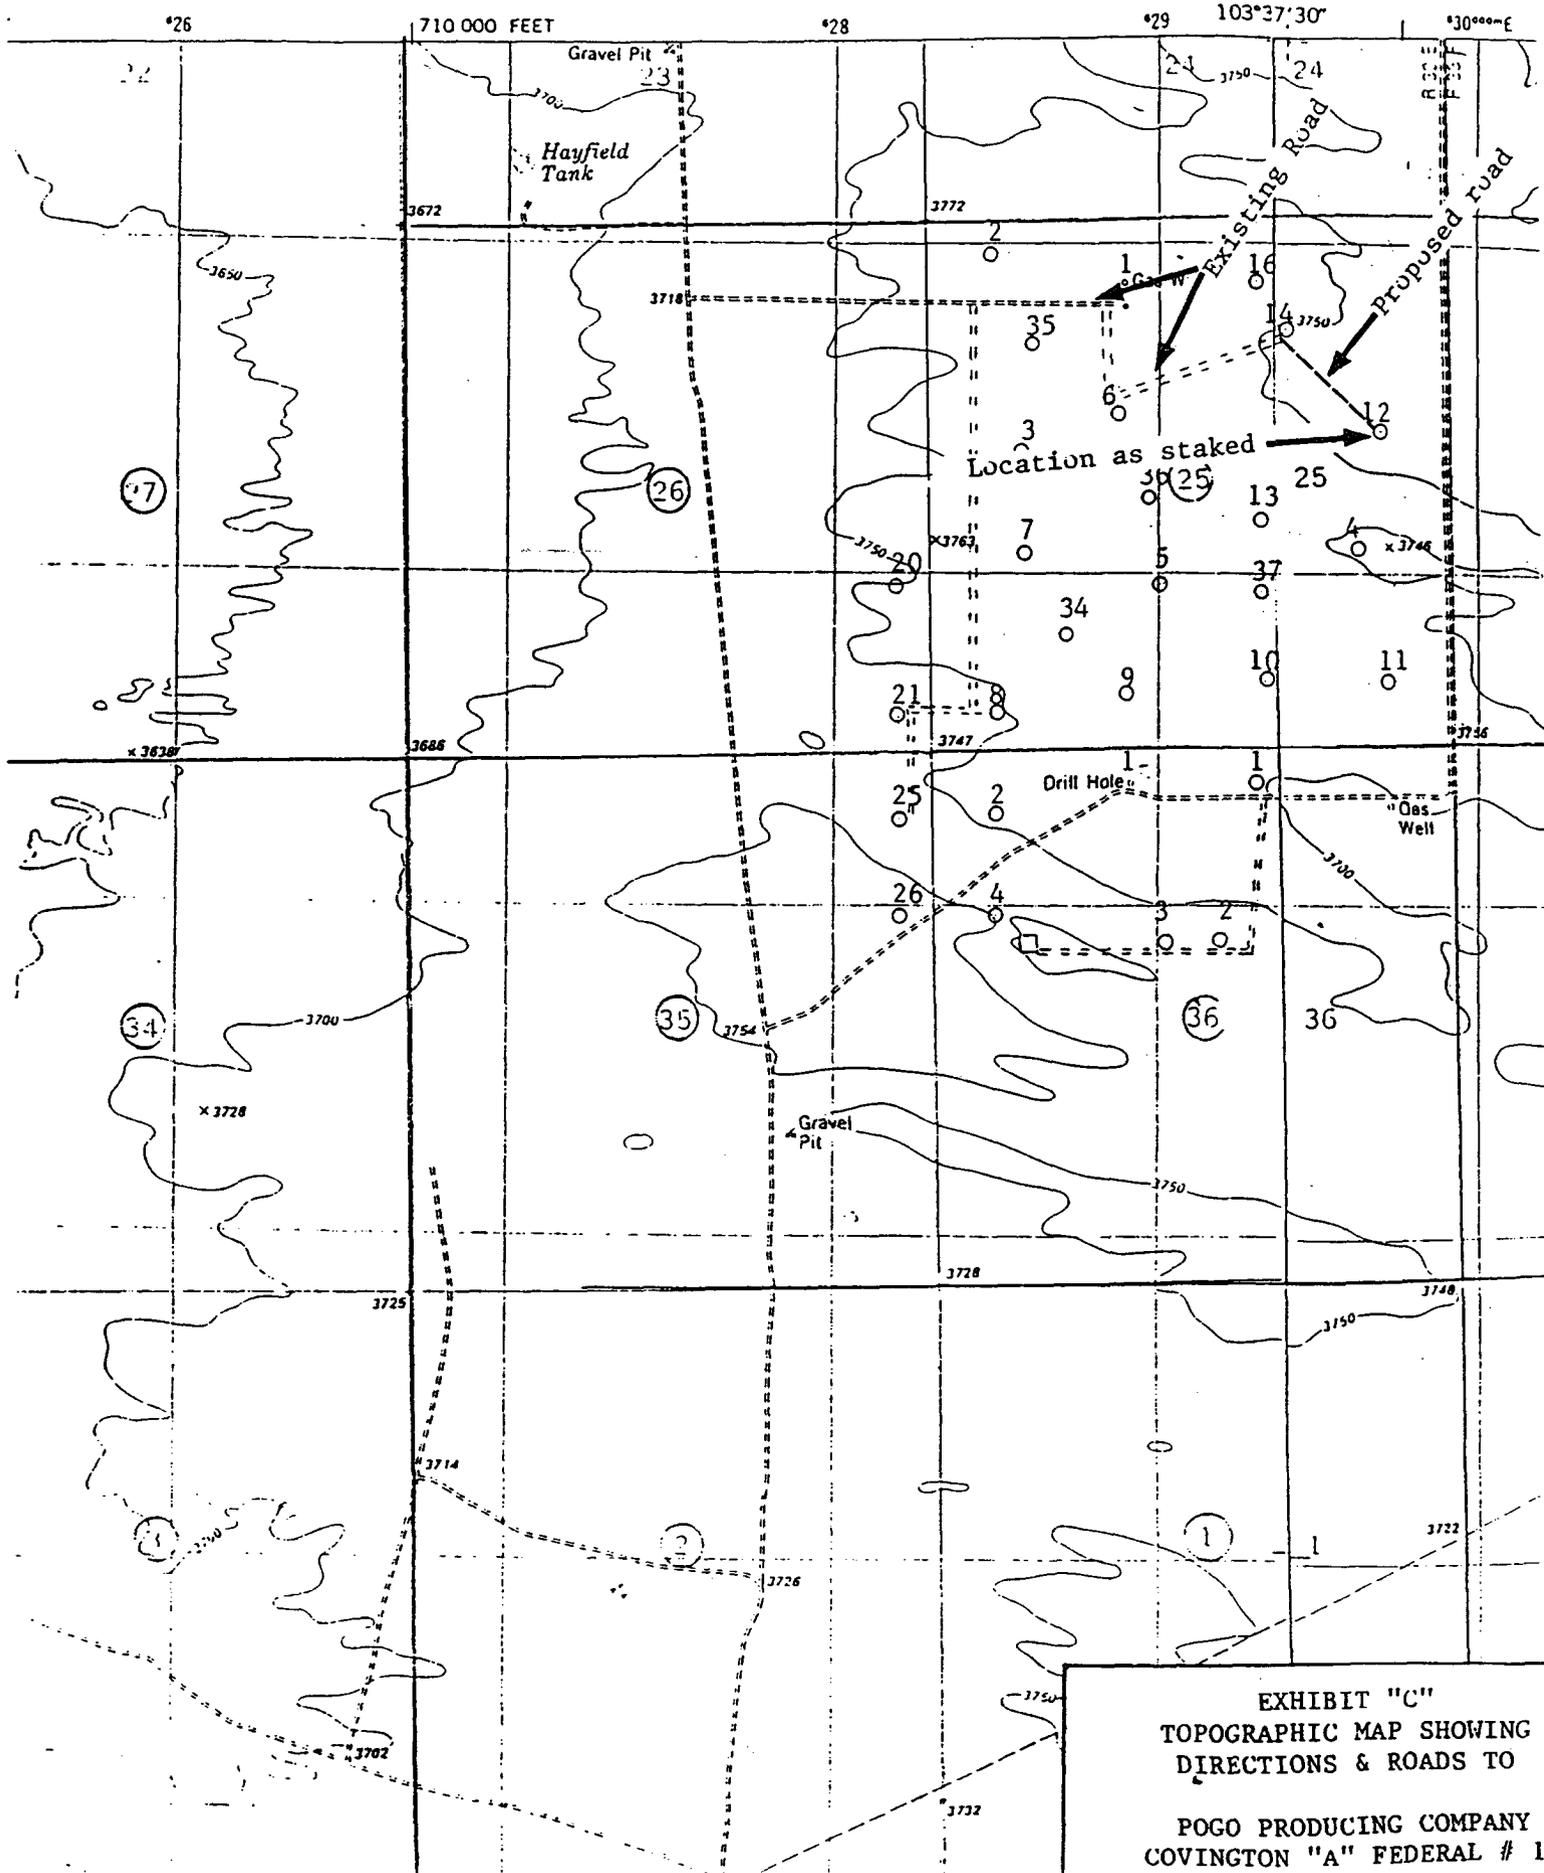


EXHIBIT "C"
TOPOGRAPHIC MAP SHOWING
DIRECTIONS & ROADS TO
POGO PRODUCING COMPANY
COVINGTON "A" FEDERAL # 1

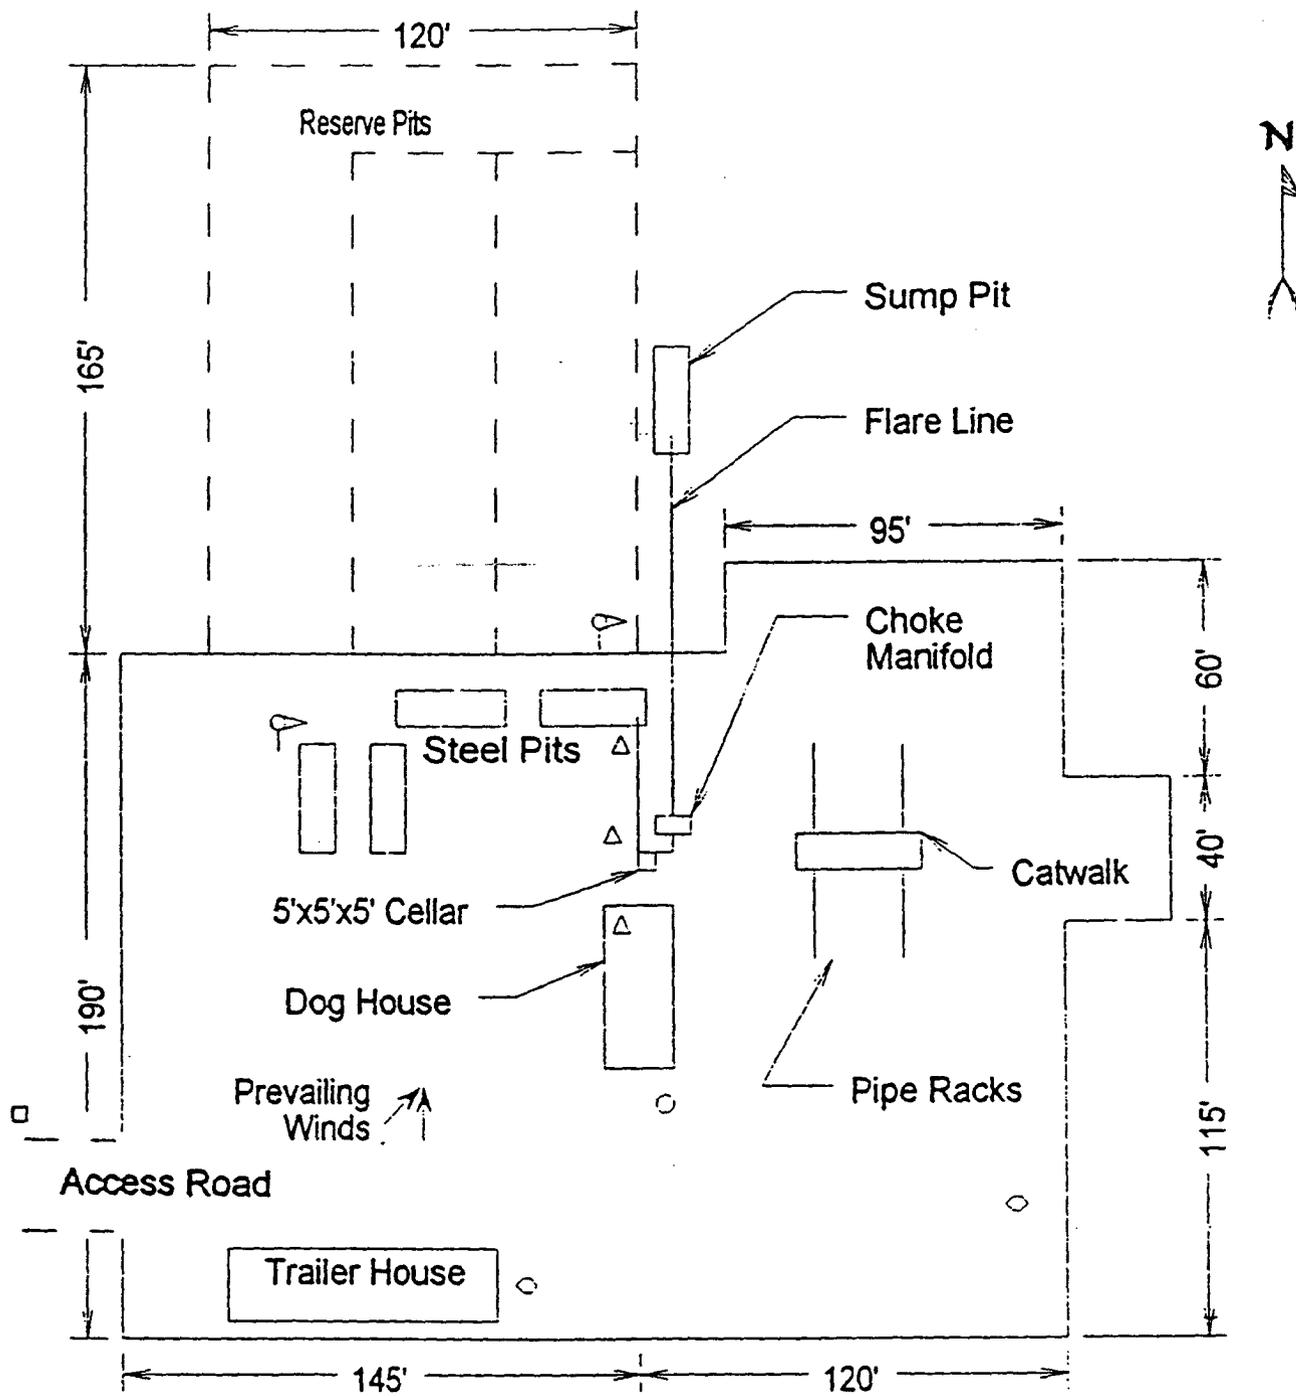

- ⚓ Wind Direction Indicators
(wind sock or streamers)
- △ H2S Monitors
(alarms at bell nipple and shale shaker)
- Briefing Areas
- Remote BOP Closing Unit
- Sign and Condition Flags

EXHIBIT "D"
RIG LAYOUT PLAT

POGO PRODUCING COMPANY
COVINGTON "A" FEDERAL # 1
UNIT "H" SECTION 2


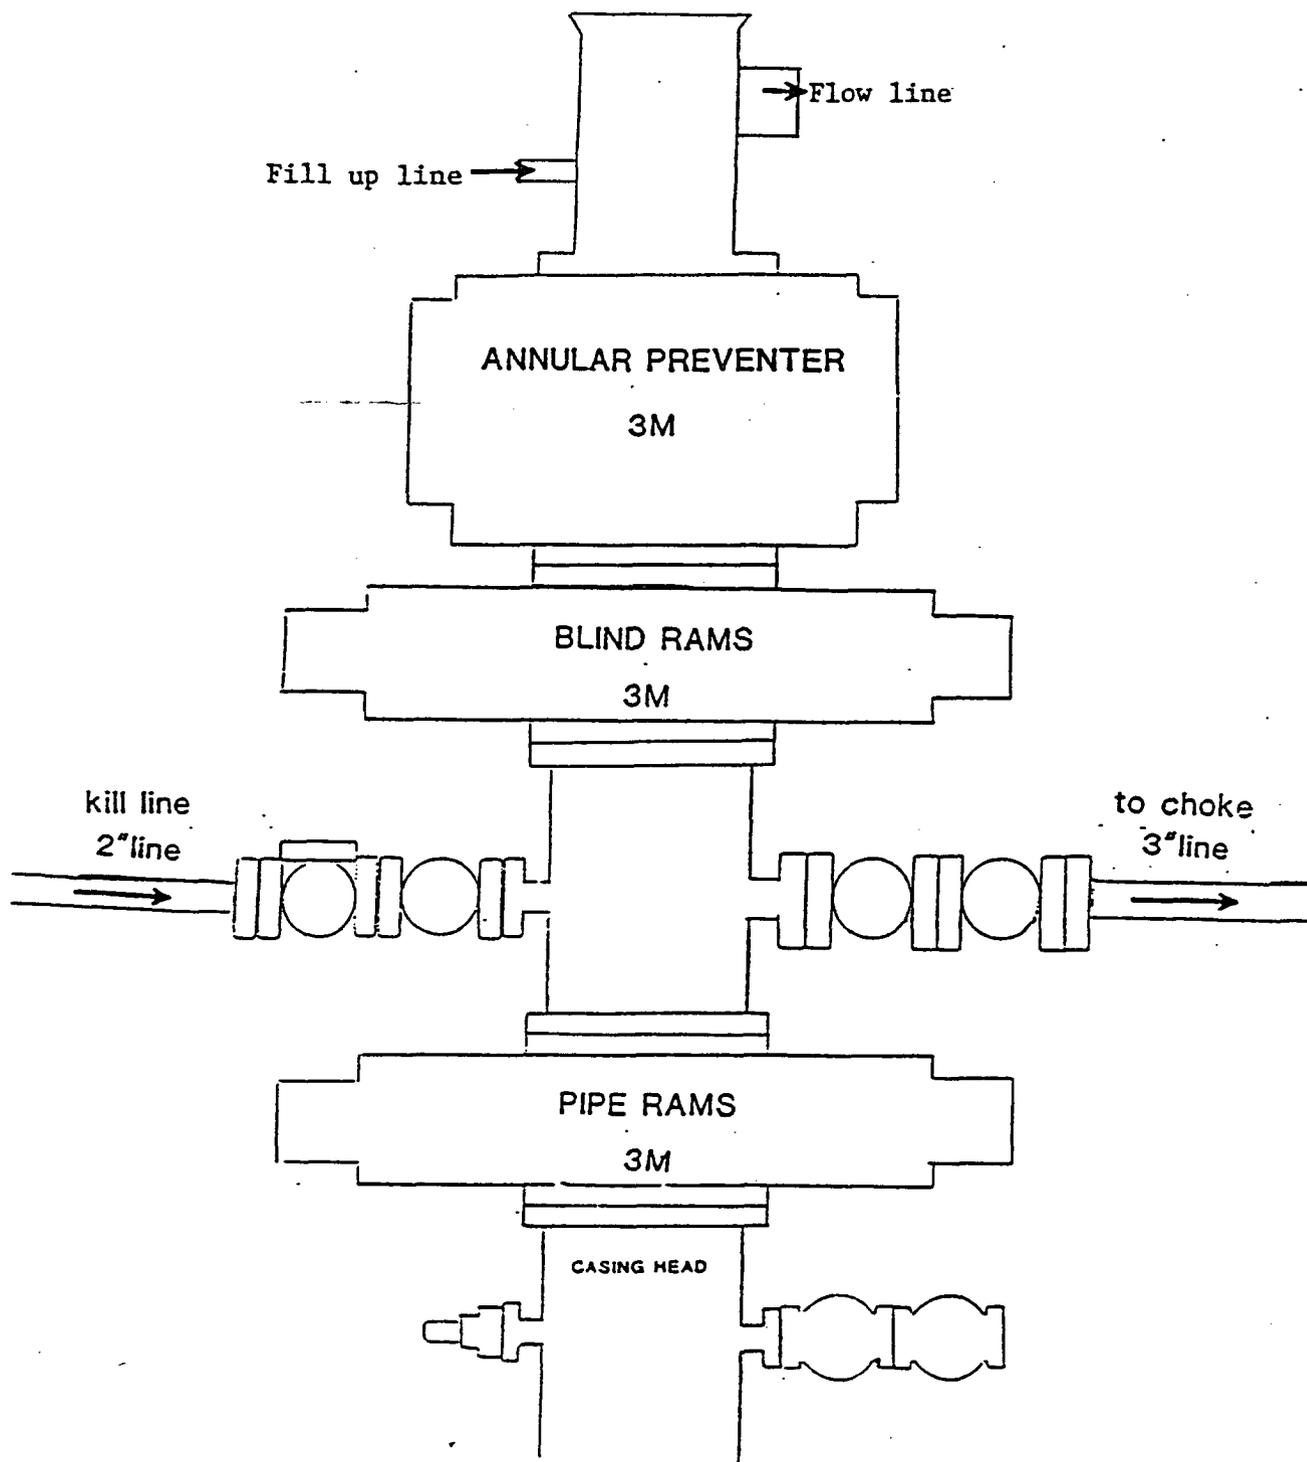


EXHIBIT "E"
SKETCH OF B.O.P. TO BE USED

POGO PRODUCING COMPANY
COVINGTON "A" FEDERAL # 1
UNIT "H" SECTION 2

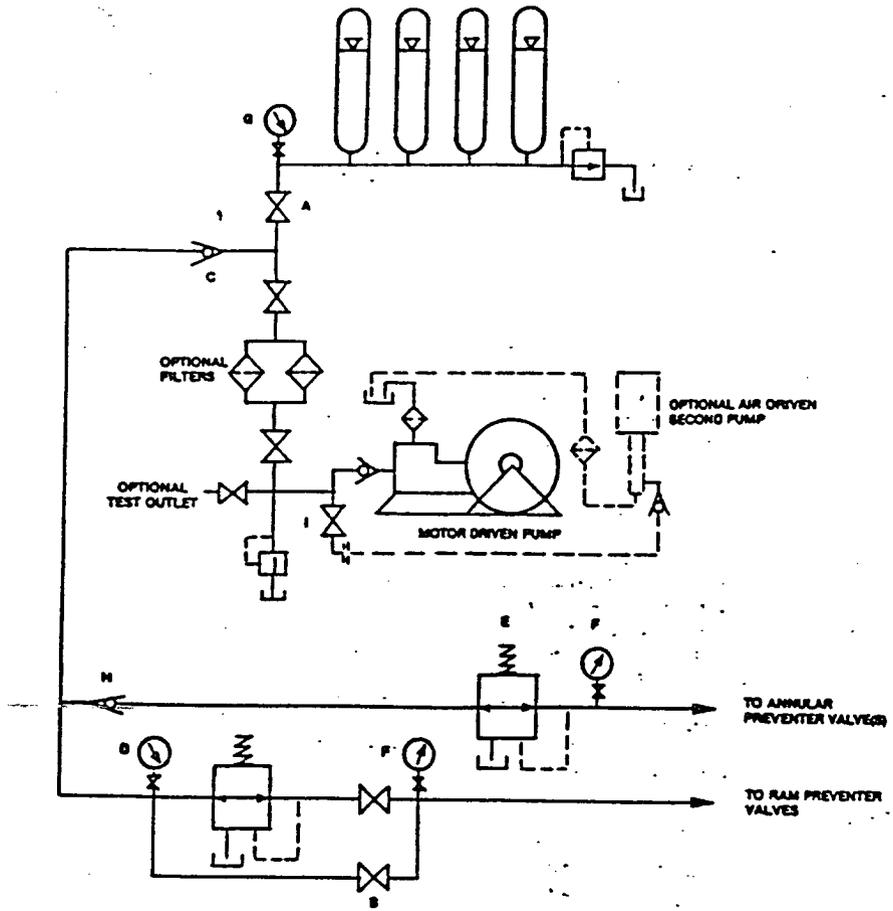

POGO PRODUCING CO
3M CHOKE MANIFOLD

HAND AJUSTABLE CHOKE

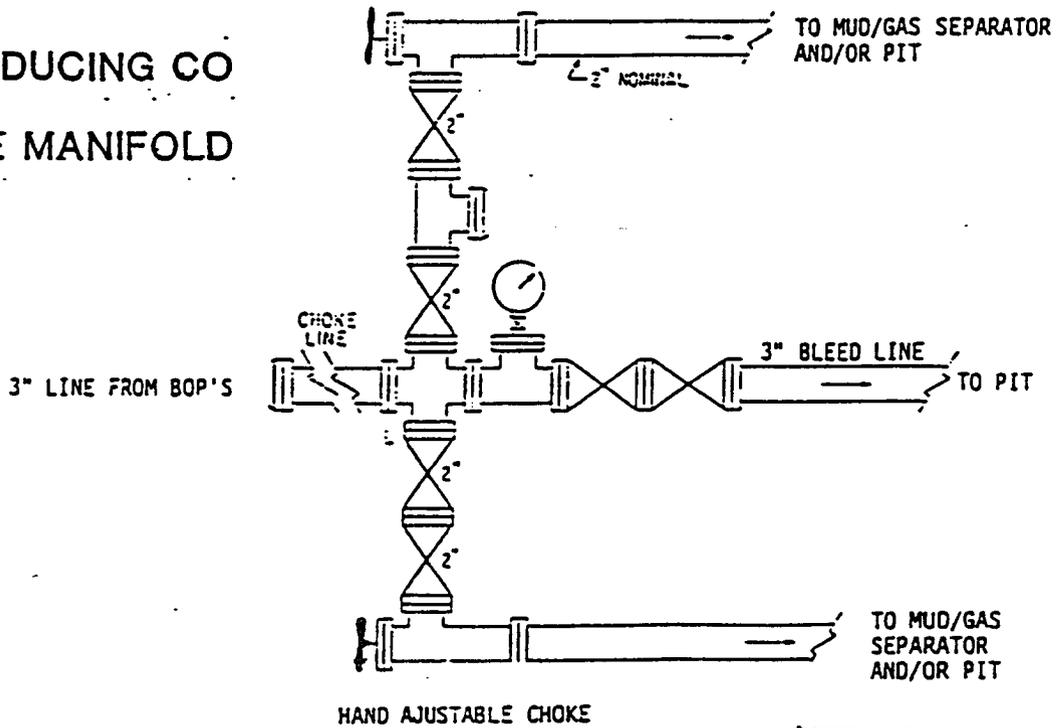


EXHIBIT "E-1"
CHOKE MANIFOLD & CLOSING UN

POGO PRODUCING COMPANY
COVINGTON "A" FEDERAL # 1
UNIT "H" SECTION 2

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Form C-14
March 12, 2004

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505


For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes No
Type of action: Registration of a pit or below-grade tank Closure of a pit or below-grade tank

Operator: Pogo Producing Company Telephone: 432-685-8100 e-mail address: wrightc@pogoproducing.com
Address: P. O. Box 10340, Midland, TX 79702-7340 37003
Facility or well name: Covington A Fed #12 API #: 30-025-36416 U/L or Qtr/Qtr H Sec 25 T 22 R 32
County: Lea Latitude 32:21:50.04N Longitude 103:37:18.08W NAD: 1927 1983 Surface Owner Federal State Private Indian

Pit	Below-grade tank	
Type: Drilling <input checked="" type="checkbox"/> Production <input type="checkbox"/> Disposal <input type="checkbox"/> Workover <input type="checkbox"/> Emergency <input type="checkbox"/> Lined <input checked="" type="checkbox"/> Unlined <input type="checkbox"/> Liner type: Synthetic <input checked="" type="checkbox"/> Thickness <u>12</u> mil Clay <input type="checkbox"/> Volume <u>16000</u> bbl	Volume: _____ bbl Type of fluid: _____ Construction material: _____ Double-walled, with leak detection? Yes <input type="checkbox"/> If not, explain why not. _____	
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet 50 feet or more, but less than 100 feet 100 feet or more	(20 points) (10 points) (0 points) <u>0</u>
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes No	(20 points) (0 points) <u>0</u>
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet 200 feet or more, but less than 1000 feet 1000 feet or more	(20 points) (10 points) (0 points) <u>0</u>
	Ranking Score (Total Points)	0

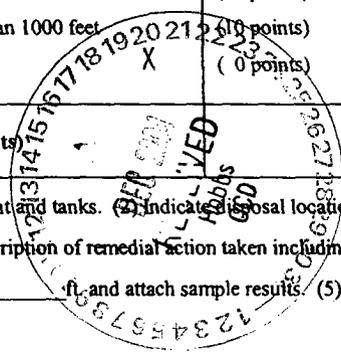

If this is a pit closure: (1) attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: onsite offsite If offsite, name of facility _____ (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No Yes If yes, show depth below ground surface _____ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines a general permit , or an (attached) alternative OCD-approved plan .
Date: 12/10/04

Printed Name/Title Cathy Wright, Sr Eng Tech Signature Cathy Wright

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval:
Date: _____
Printed Name/Title DEC 16 2004

Signature _____
**ORIGINAL SIGNED BY,
PAUL F. KAUTZ
PETROLEUM ENGINEER**

Ground-water levels for New Mexico

Search Results -- 1 sites found

Search Criteria

site_no list = • 322314103384301

Save file of selected sites to local disk for future upload

USGS 322314103384301 22S.32E.14.32322

Available data for this site

Ground-water: Levels



Lea County, New Mexico
Hydrologic Unit Code
Latitude 32°23'14", Longitude 103°38'43" NAD27
Gage datum 3,717.00 feet above sea level NGVD29
The depth of the well is 435 feet below land surface.
This well is completed in SANTA ROSA SANDSTONE (231SNRS)


Output formats

[Table of data](#)

[Tab-separated data](#)

[Graph of data](#)

[Reselect period](#)

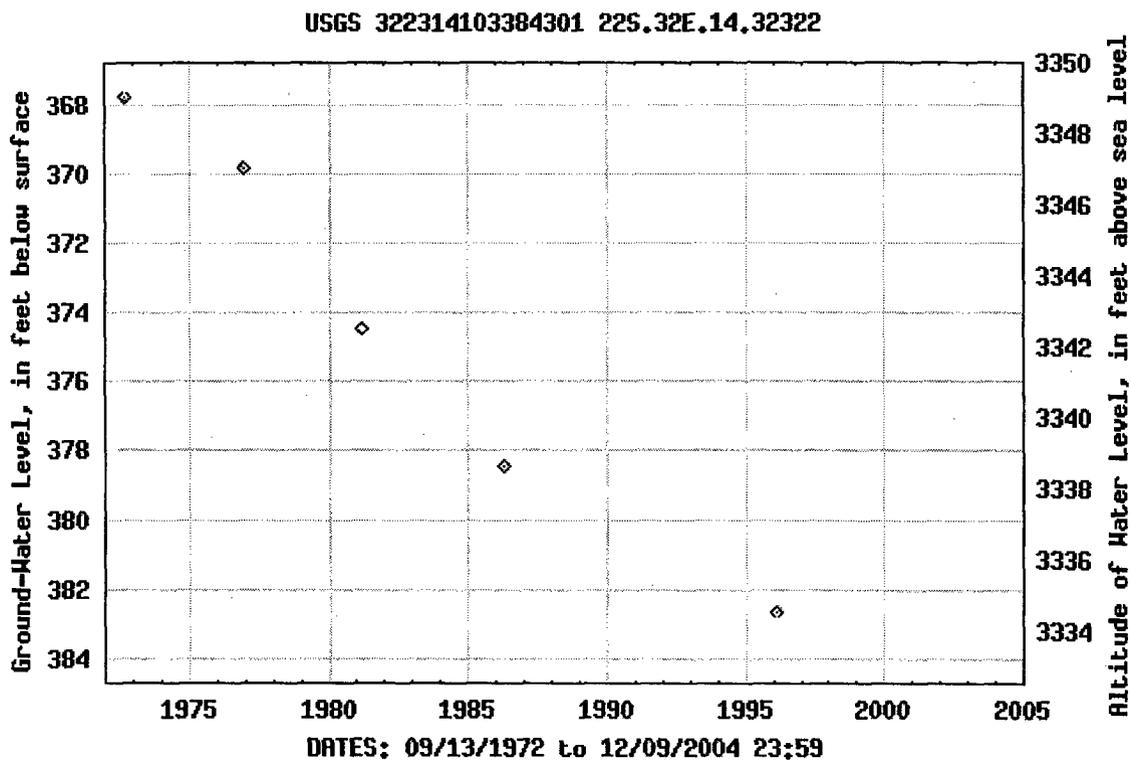

Breaks in the plot represent a gap of at least one calendar year between two consecutive points.

[Download a presentation-quality graph](#)

[Questions about data](#) [New Mexico NWISWeb Data Inquiries](#)

[Feedback on this website](#) [New Mexico NWISWeb Maintainer](#)

[Ground water for New Mexico: Water Levels](#)

<http://waterdata.usgs.gov/nm/nwis/gwlevels?>

[Top](#)
[Explanation of terms](#)

Retrieved on 2004-12-09 10:15:14 EST

[Department of the Interior, U.S. Geological Survey](#)

[USGS Water Resources of New Mexico](#)

[Privacy Statement](#) || [Disclaimer](#) || [Accessibility](#) || [FOIA](#)

2.02 1.48 nadww01



Water Resources

Data Category:

Site Information

Geographic Area:

New Mexico

GO

This server(nwis.waterdata.usgs.gov) is currently experiencing network and database connectivity problems which prevent Real-Time data from being updated. We are actively working on resolving this issue.



All real-time data continues to be available at <http://waterdata.usgs.gov/nwis/rt>.

Site Map for New Mexico

USGS 322314103384301 22S.32E.14.32322


Available data for this site

site map


GO

Lea County, New Mexico
Hydrologic Unit Code
Latitude 32°23'14", Longitude 103°38'43" NAD27
Gage datum 3,717.00 feet above sea level NGVD29

Location of the site in New Mexico.

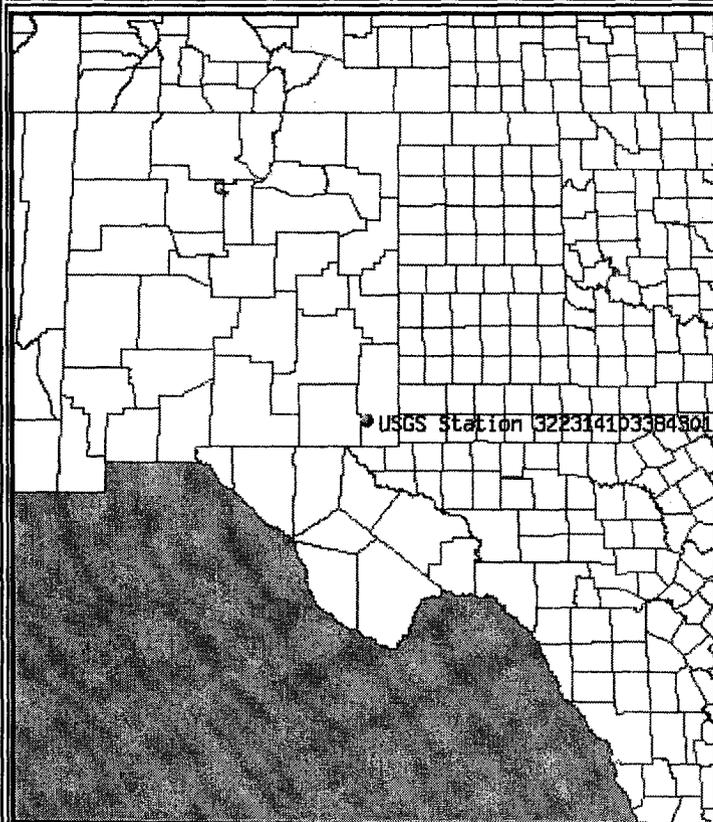


Site map.

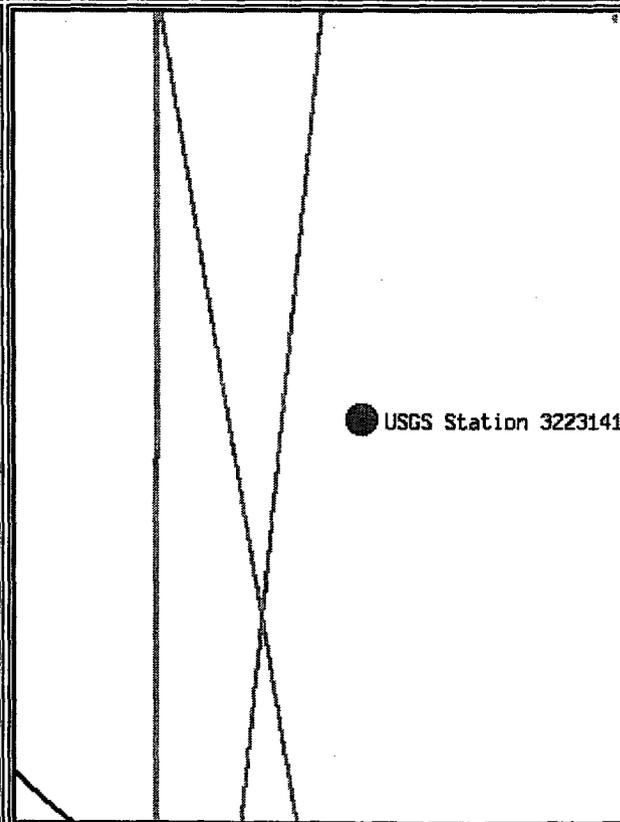

POGO Producing Company Covington A Federal #12 Approximate Pit Dimensions

H/25/22S/32E, Lea County, New Mexico
API # 30 025 36416

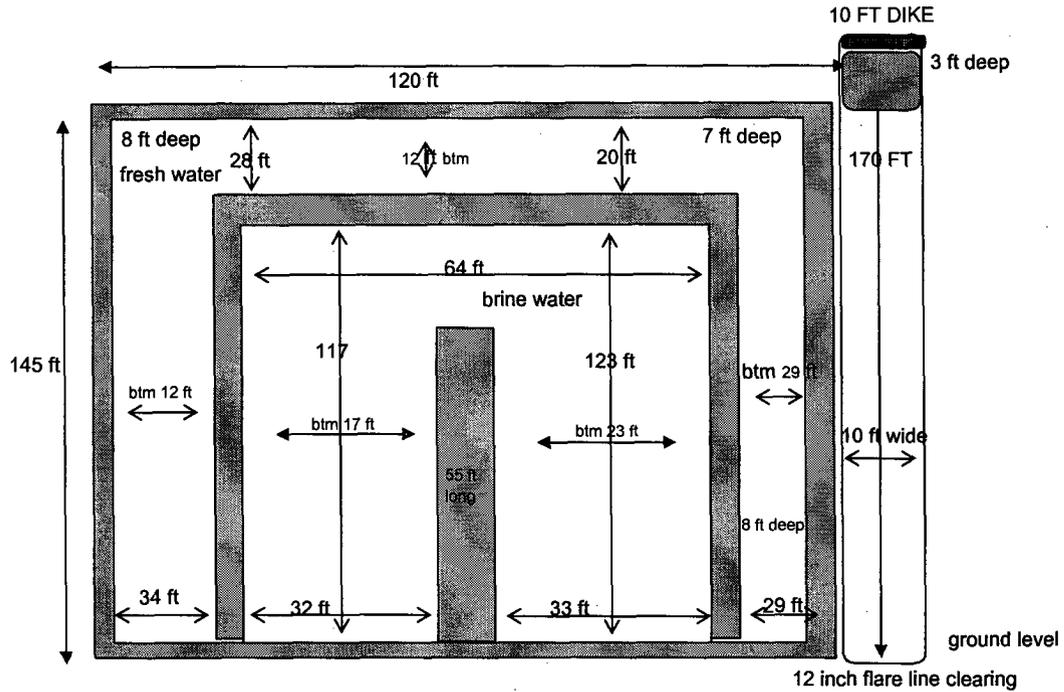

PIT NOTES:

Pit will be lined with 12 mil Black plastic w/ UV protection.
Pit walls are 6 ft to 8 ft wide.
Pit is 8 ft deep below ground level plus 2 ft walls
Pit walls are 2 ft above ground level.
Caliches mined from pit used to make Well Pad.
Fresh Water volume to ground level = ± 7950 bbls
Brine Water volume to ground level = ± 7730 bbls
12 inch Flare line laid on gradual descending graded ROW away from rig to avoid fluid trapping
Fresh water well = (Nad 27) 32° 23' 14" N & 103° 38' 43" W "Published data"
This well produces from a depth greater than 100 ft.

Pit equals approx 16000 bbls

Great Circle Calculator.

By Ed Williams

You need Javascript enabled if you want this page to do anything useful! For Netscape, it's under Options/Network Preferences/Languages.

Compute true course and distance between points.

Enter lat/lon of points, select distance units and earth model and click "compute". Lat/lons may be entered in DD.DD, DD:MM.MM or DD:MM:SS.SS formats.

Note that if either point is very close to a pole, the course may be inaccurate, because of its extreme sensitivity to position and inevitable rounding error.

Input Data

Lat1		Lon1	
32:23.14	N	103:38:43	W
Lat2		Lon2	
32:21:50.04	N	103:37:18.08	W

Output

Course 1-2	Course 2-1	Distance
137.526835	317.539465	1.770443885

Distance Units: Earth model:

Compute lat/lon given radial and distance from a known point

Enter lat/lon of initial point, true course and distance. Select distance units and earth model and click "compute". Lat/lons may be entered in DD.DD, DD:MM.MM or DD:MM:SS.SS formats.

Note that the starting point cannot be a pole.

Input data

Lat1		Lon1	
0:00.00	N	0:00.00	W
Course 1-2		Distance 1-2	