

EC

OPER. OGRID NO. 873
PROPERTY NO. 34401
POOL CODE 96121
EFF. DATE 1/12/05
API NO. 30-025-37042FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

APPLICANT

Lease Serial No.
NMLC032573B

If Indian, Allottee or Tribe Name

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		7. If Unit or CA Agreement, Name and No.	
1b. Type of Well: <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other: INJ <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		8. Lease Name and Well No. ELLIOTT B 9	
2. Name of Operator APACHE CORPORATION		9. API Well No. <u>30-025-37042</u>	
3a. Address 6120 SOUTH YALE, TWO WARREN PLACE, SUITE TULSA, OK 74136-4224		10. Field and Pool, or Exploratory SWD; SAN ANDRES	
3b. Phone No. (include area code) 1500: 505-624-9799 Fx: 505-624-9799			
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface SESE Tract P 330FSL 330FEL At proposed prod. zone SESE Tract P 330FSL 330FEL SUBJECT TO LIKE APPROVAL BY STATE		11. Sec., T., R., M., or Blk. and Survey or Area Sec 6 T22S R37E Mer NMP	
14. Distance in miles and direction from nearest town or post office* 2 MILES SOUTHWEST OF EUNICE, NM		12. County or Parish LEA	
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 330'		13. State NM	
16. No. of Acres in Lease 360.00		17. Spacing Unit dedicated to this well	
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 400'		20. BLM/BIA Bond No. on file	
19. Proposed Depth 5050 MD 5050 TVD		21. Estimated Duration 15 DAYS Hobbs	
21. Elevations (Show whether DF, KB, RT, GL, etc.) 3435 GL		22. Approximate date work will start 12/24/2004	

24. Attachments

CAPITAN CONTROLLED WATER BASIN

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature (Electronic Submission)	Name (Printed/Typed) MOHAMED EL-AHMADY Ph: 918.491.4977	Date 12/17/2004
Title DRILLING ENGINEER		
Approved by (Signature) /s/ Joe G. Lara	Name (Printed/Typed) /s/ Joe G. Lara	Date JAN - 7 2005
Title ACTING FIELD MANAGER		
Office CARLSBAD FIELD OFFICE		

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

APPROVAL FOR 1 YEAR

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #52030 verified by the BLM Well Information System
For APACHE CORPORATION, sent to the Hobbs
Committed to AFMSS for processing by ARMANDO LOPEZ on 12/21/2004 (05AL0021AE)APPROVAL SUBJECT TO
GENERAL REQUIREMENTS
AND SPECIAL STIPULATIONS
ATTACHED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **

KZ

Additional Operator Remarks:

This is a salt water disposal well.

Surface Owner: McNeill Ranch, P. O. Box 1058, Hobbs, NM 88241.
Contact Person: Page McNeill 505-631-5211

DISTRICT I
1625 N. FRANCH DR., ROSA, NM 88240

DISTRICT II
1301 W. GRAND AVENUE, ARTESIA, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Artesia, NM 87410

DISTRICT IV
1220 S. ST. FRANCIS DR., SANTA FE, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

EXHIBIT D-1

C-102

Revised JUNE 10, 2003

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

OIL CONSERVATION DIVISION
1220 SOUTH ST. FRANCIS DR.
Santa Fe, New Mexico 87505

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-25-37042	Pool Code 96121	Pool Name SWD; San Andres
Property Code 34401	Property Name ELLIOTT B	Well Number 9
OGRID No. 873	Operator Name APACHE CORPORATION	Elevation 3435'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	6	22-S	37-E		330	SOUTH	330	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40.00	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

LOT 4	LOT 3	LOT 2	LOT 1
37.24 AC LOT 5	40.12 AC	40.21 AC	40.30 AC
37.13 AC LOT 6	<p>GEODETIC COORDINATES NAD 27 NME</p> <p>Y=516337.1 N X=851516.9 E</p> <p>LAT.=32°24'51.75" N LONG.=103°11'39.36" W</p>		
37.07 AC LOT 7			
36.99 AC	<p>DETAIL</p> <p>3436.8' 3434.5'</p> <p>3434.6' 3433.2'</p> <p>600' 800'</p> <p>SEE DETAIL</p> <p>330' 330'</p>		

OPERATOR CERTIFICATION

I hereby certify the information contained herein is true and complete to the best of my knowledge and belief.

Mohamed Elahmady
Signature

Mohamed Elahmady
Printed Name

Drilling Engineer
Title

11/4/04
Date

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

OCTOBER 25, 2004

Date Surveyor
Signature & Seal
Professional Surveyor
GARY EIDSON
10/25/04
04.11.1409C
Certificate No. GARY EIDSON 12641

State of New Mexico

EXHIBIT D-2

DISTRICT I

1625 N. FRENCH DR., BOBBS, NM 88240

Energy, Minerals and Natural Resources Department

DISTRICT II

1301 W. GRAND AVENUE, ARTESIA, NM 88210

OIL CONSERVATION DIVISION

1220 SOUTH ST. FRANCIS DR.

Santa Fe, New Mexico 87505

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV

1220 S. ST. FRANCIS DR., SANTA FE, NM 87505

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-25-	Pool Code 96121	Pool Name SWD; San Andres
Property Code 34401	Property Name ELLIOTT B	Well Number 9
OGRID No. 873	Operator Name APACHE CORPORATION	Elevation 3435'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	6	22-S	37-E		330	SOUTH	330	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40.00	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

LOT 4	LOT 3	LOT 2	LOT 1
37.24 AC LOT 5	40.12 AC	40.21 AC	40.30 AC
37.13 AC LOT 6			
37.07 AC LOT 7			
36.99 AC			

ELLIOTT B 3-P

OPERATOR CERTIFICATION

I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.

Mohamed Elahmady
Signature

Mohamed Elahmady
Printed Name

Drilling Engineer
Title

11/4/04
Date

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

OCTOBER 25, 2004
Date Surveyed


LA
Signature & Seal of Professional Surveyor

04.11.1409

Certificate No. GARY EIDSON 12641


SECTION 6, TOWNSHIP 22 SOUTH, RANGE 37 EAST, N.M.P.M.,
 LEA COUNTY, NEW MEXICO

EXHIBIT D-3

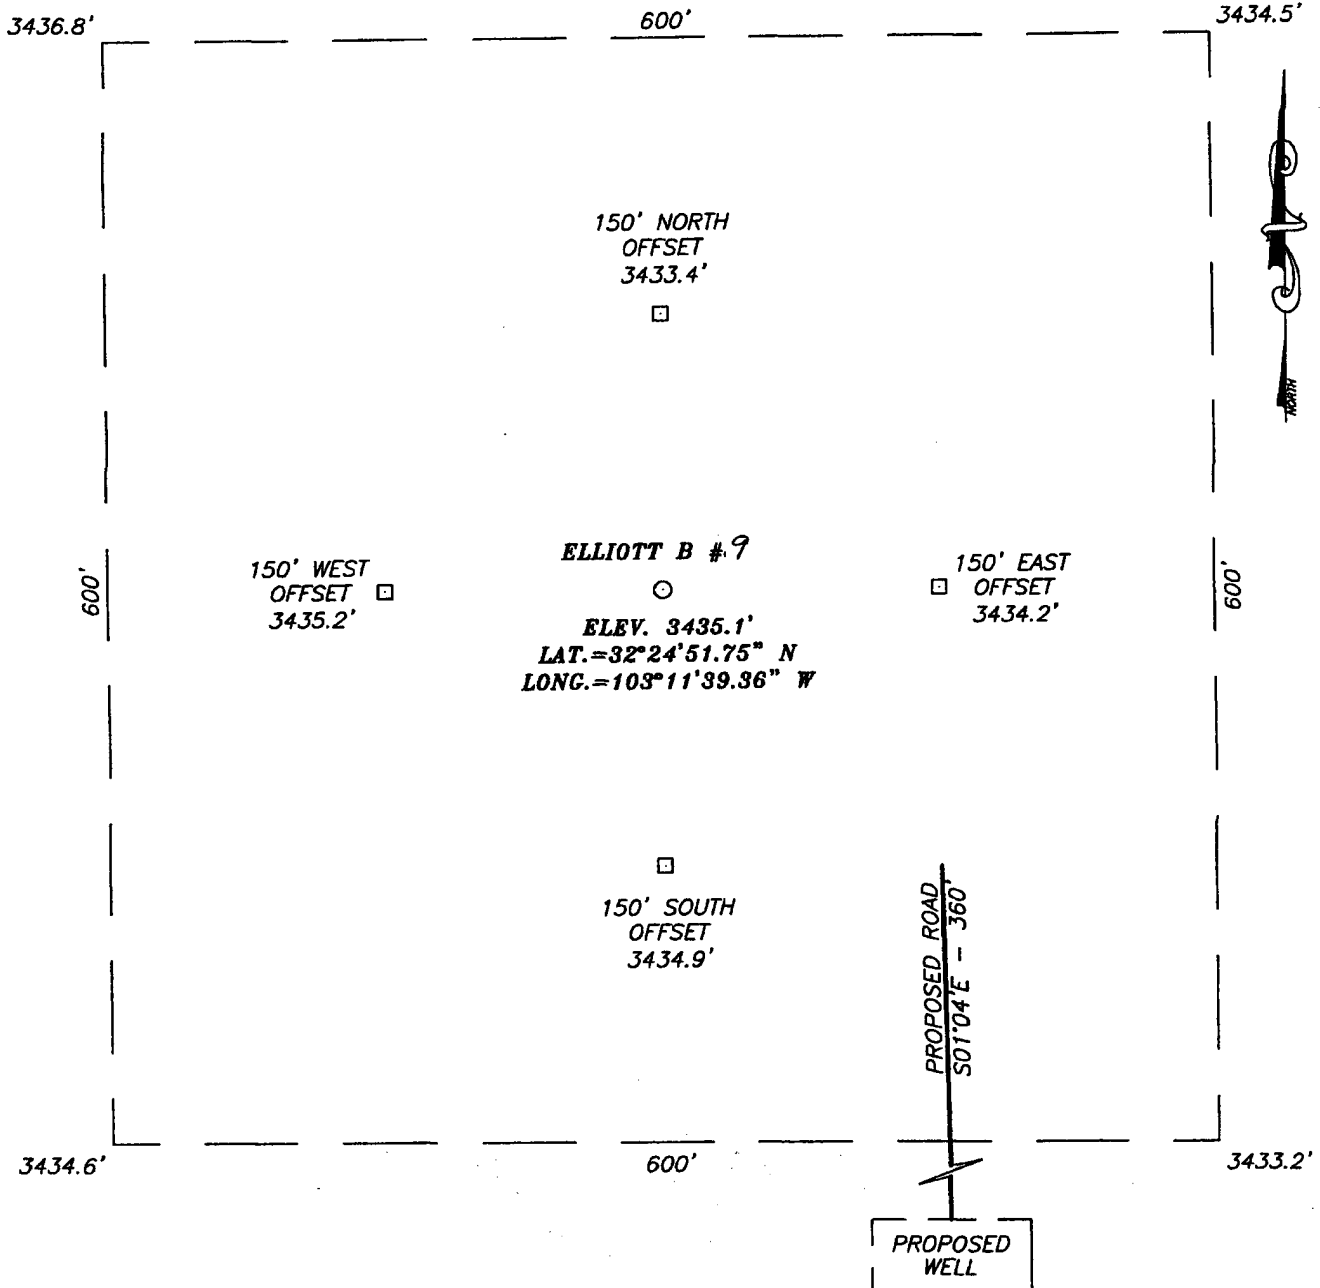

DIRECTIONS TO LOCATION


FROM THE INTERSECTION OF CO. RD. #21
 (DELAWARE BASIN RD) AND CO. RD. #33 (LEGION
 RD.) GO NORTH ON CO. RD. #33 FOR 1.3 MILES
 TO A CALICHE ROAD ON THE LEFT. TURN LEFT
 AND GO WEST 200' AND TAKE LEFT FORK.
 FOLLOW ROAD IN A WESTERLY DIRECTION FOR
 APPROX. 1.0 MILE. THIS LOCATION IS NORTH
 1100'±.



APACHE CORPORATION


ELLIOTT B #8WD WELL
 LOCATED 330 FEET FROM THE SOUTH LINE
 AND 330 FEET FROM THE EAST LINE OF SECTION 6,
 TOWNSHIP 22 SOUTH, RANGE 37 EAST, N.M.P.M.,
 LEA COUNTY, NEW MEXICO.

Survey Date: 10/25/04	Sheet 1 of 1 Sheets
W.O. Number: 04.11.1409	Dr By: LA
Date: 10/28/04	Disk: CD#3
04111409	Scale: 1"=100'

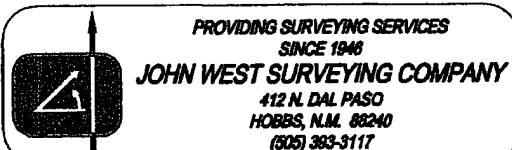

VICINITY MAP

EXHIBIT E-1

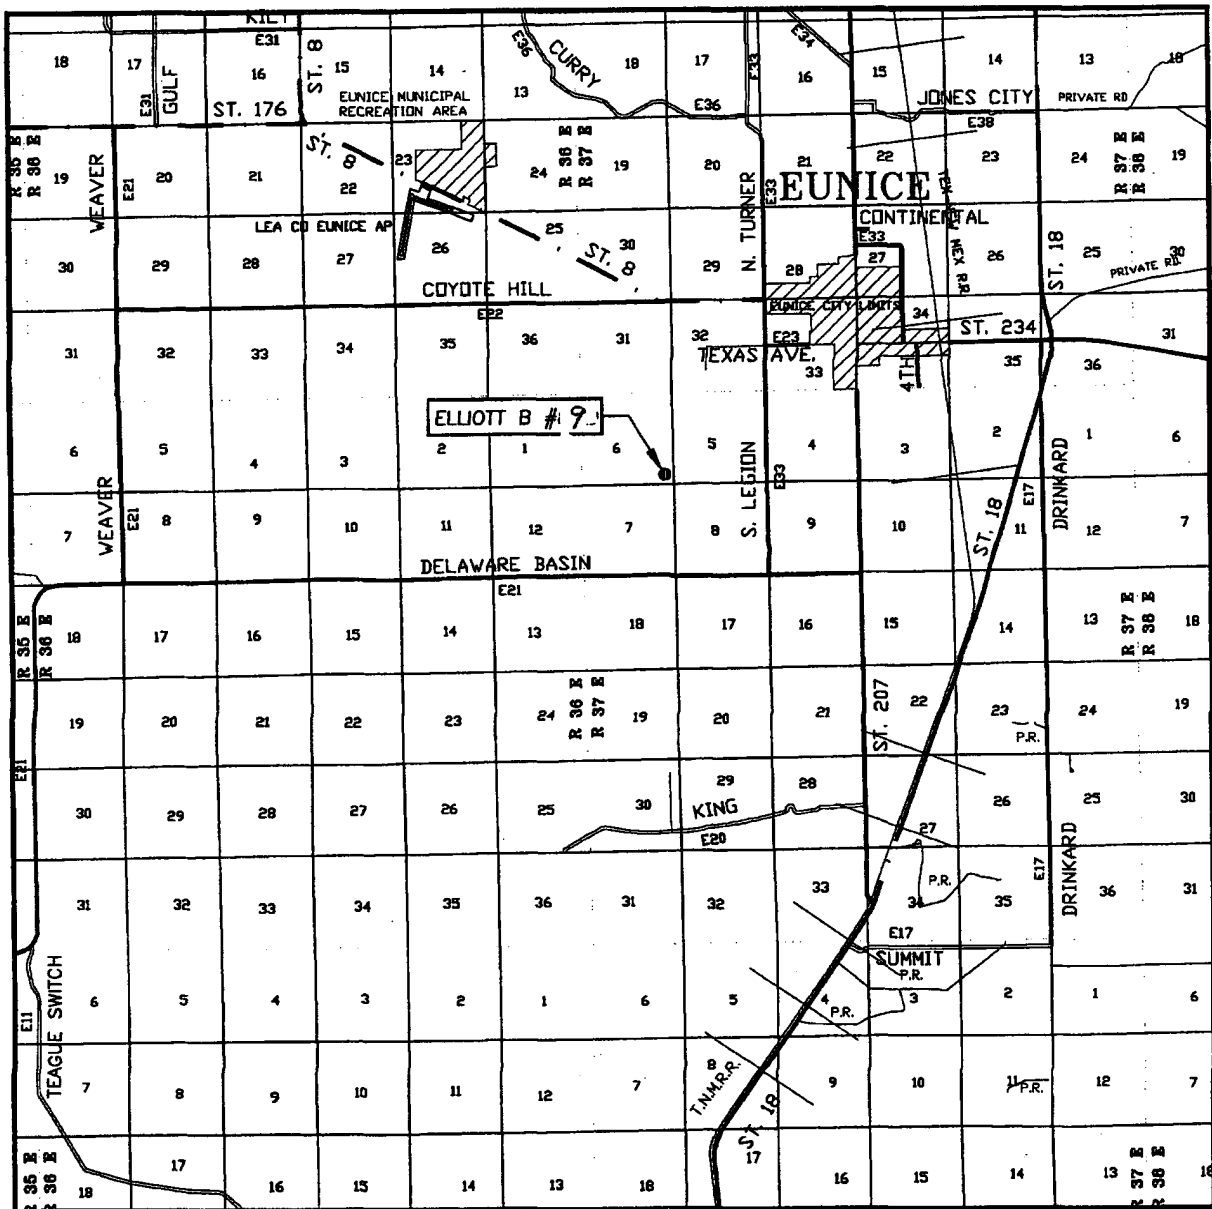

SCALE: 1" = 2 MILES

SEC. 6 TWP. 22-S RGE. 37-E
 SURVEY N.M.P.M.
 COUNTY LEA
 DESCRIPTION 330' FSL & 330' FEL
 ELEVATION 3435'
 OPERATOR APACHE CORPORATION
 LEASE ELLIOTT B

PROVIDING SURVEYING SERVICES
 SINCE 1946
JOHN WEST SURVEYING COMPANY
 412 N. DAL PASO
 HOBBS, N.M. 88240
 (505) 393-3117

EXHIBIT E-2



CONTOUR INTERVAL:
EUNICE, N.M. - 10'

U.S.G.S. TOPOGRAPHIC MAP
EUNICE, N.M.

**PROVIDING SURVEYING SERVICES
SINCE 1946
JOHN WEST SURVEYING COMPANY
412 N. DAL PASO
HOBBS, N.M. 88240
(505) 393-3117**

EXHIBIT "A"
ELLIOTT B #9

DRILLING PROGRAM

- I. The geological surface formation is recent Permian with quaternary alluvium and other surficial deposits.
II. Estimated Tops of Geological Markers:

<u>FORMATION</u>	<u>DEPTH</u>
Quaternary alluvials	Surface
Rustler	1088''
Yates	2643'
Seven Rivers	2869'
Queen	3365'
Grayburg	3638'
San Andres	3864'
TD	5050'
Glorieta	5100'

- III. Estimated depths at which water will be injected:

SUBSTANCE
Injection Water

DEPTH
San Andres@4400'

Fresh Water

None anticipated

All fresh water and prospectively valuable minerals (as described by BLM) encountered during drilling will be recorded by depth and adequately protected.

- IV. A. Proposed Casing Program:

<u>HOL</u>	<u>CASING</u>		<u>WEIGHT</u>		<u>DEPTH</u>	<u>SACKS</u>	<u>ESTIMATED TOC -</u>
<u>E</u>	<u>SIZE</u>	<u>ID</u>	<u>GRAD</u>	<u>PER</u>		<u>CEMENT</u>	<u>REMARKS</u>
<u>SIZE</u>	OD		<u>E</u>	<u>FOOT</u>			
12 1/4"	9 5/8"		k55	40#	1150'	575	TOC - Surface
	8.835		STC		<u>(Pursuant</u>		8.6 ppg Water-based
					<u>to Lea</u>		Mud;
					<u>County</u>		83° F Est. Static Temp;
					<u>Alternative</u>		80 ° F Est. Circ. Temp.
					<u>Casing</u>		
					<u>Program)</u>		
8 3/4"	7"		k55	26#	4400'	725	TOC - Surface
	6.276		LTC				Float Collar set @
							4160' / 10.20 ppg
							Brine Mud;
							118° F Est. Static
							Temp;
							100° F Est. Circ. Temp.
6 1/8"	Openhole				5050'		

B. Proposed Cement Program:

<u>CASING</u>	<u>LEAD SLURRY</u>	<u>TAIL SLURRY</u>	<u>DISPLACEMENT</u>
8 5/8"	400 sacks Class C Cement + 2% bwoc Calcium Chloride + 0.25 lbs/sack Cello Flake + 0.003 gps FP-6L + 6% bwoc 750 Vol. Cu Ft 1.94 Vol. Factor Slurry Weight (ppg) 12.7 Slurry Yield (cf/sack) 1.88 Amount of Mix Water (gps) 10.7; <u>Estimated Pumping Time – 70 BC</u> <u>(HH:MM)-3:00;</u>	175 sacks Class C Cement + 2% bwoc Calcium Chloride + 0.125 lbs/sack Cello Flake + 56.3% Fresh Water 240 Vol. Cu Ft 1.94 Vol. Factor Slurry Weight (ppg) 14.8 Slurry Yield (cf/sack) 1.35 Amount of Mix Water (gps) 6.35 Estimated Pumping Time – 70 BC (HH:MM)-3:00;	80.2 bbls Fresh Water 8.34 ppg

876 ft	x	0.4127 cf/ft	with	108% excess	=	751.97 cf
274 ft	x	0.4127 cf/ft	with	100% excess	=	226.15 cf
40 ft	x	0.3576 cf/ft	with	0% excess	=	14.3 cf (inside pipe)
TOTAL SLURRY VOLUME			=	992 cf		
			=	175 bbls		

Spacer 30.0 bbls Water @ 8.3 ppg

<u>CASING</u>	<u>LEAD SLURRY</u>	<u>TAIL SLURRY</u>	<u>DISPLACEMENT</u>
7 "	475 sacks (50:50) Poz (Fly Ash): Class C Cement + 5% bwow Sodium Chloride + 0.125 lbs/sack Cello Flake + 0.003 gps FP-6L + 10% bwoc Bentonite + 139.7% Fresh Water; 1161 Vol. Cu Ft 2.44 Vol. Factor Slurry Weight (ppg) 11.8 Slurry Yield (cf/sack) 2.44 Amount of Mix Water (gps) 14.07; Amount of Mix Fluid (gps) 14.07 <u>Estimated Pumping Time – 70</u> <u>BC (HH:MM)-4:00;</u>	250 sacks (50:50) Poz (Fly Ash): Class C Cement + 5% bwow Sodium Chloride + 0.003 gps FP-6L + 0.4% bwoc FL-25 + 57.5% Fresh Water 341 Vol. Cu Ft 1.37 Vol. Factor Slurry Weight (ppg) 14.8 Slurry Yield (cf/sack) 1.37 Amount of Mix Water (gps) 6.49; Amount of Mix Fluid (gps) 6.49; Estimated Pumping Time – 70 BC (HH:MM)-3:00;	159 bbls Fresh Water @ 8.34 ppg

7" Casing: Volume Calculations:

400 ft	x	0.1585 cf/ft	with	0% excess	=	63.4 cf
2914 ft	x	0.1503 cf/ft	with	151% excess	=	1097.6 cf
886 ft	x	0.1503 cf/ft	with	150% excess	=	332.8 cf
40 ft	x	0.2148 cf/ft	with	0% excess	=	8.6 cf (inside pipe)
TOTAL SLURRY VOLUME			=	1502.4 cf		
			=	268 bbls		

All slurries will be tested prior to loading to confirm thickening times and a lab report furnished to Apache. Fluid loss will be tested and reported on slurries with fluid loss additives. Lab test report will be furnished prior to pumping cement.

V. A. Proposed Mud Program

<u>DEPTH</u>	<u>MUD PROPERTIES</u>	<u>REMARKS</u>
0 – 1150'	Weight: 8.6 – 9.2 ppg Viscosity: 32 – 50 sec/qt Plastic Viscosity: 2-10 cps Yield Point: 6-15 lbs/100' pH: 9-10 Filtrate: NC Solids: <4 % volume Chloride: <4,000 mg/L	Spud with Fresh Water AQUAGEL EZ-Mud, LCM, Lime. Add AQUAGEL and LIME to Fresh Water to build desired viscosity for hole cleaning, restricting system to steel pits. Additions of Fresh Water at the flowline will aid in controlling viscosity. HY-SEAL "sweeps" as needed for extra hole cleaning, seepage and severe losses. Should total circulation loss be encountered, add up to 20 ppb. LCM (BARO-SEAL = Maxiseal); (HY-SEAL = Drilling Paper); (PLUG-GIT = Cedar Fiber) and spot in loss zone. If returns cannot be established, then "dry-drill" to set surface casing.
1150' -4400'	Weight: 9.2 ppg Viscosity: 30 – 32 sec/qt Plastic Viscosity: 0-1 cps Yield Point: 0-1 lbs/100' pH: 9-10 Filtrate: NC Solids: <1 % volume Chloride: < 30K mg/L	Drill out from under the surface casing with Fresh Water. HY-SEAL should be added at 2 bags after every 100' drilled, if you have and drag or torque on connections. Begin adding 10 # Brine 100' before drilling salt formation for 9.7 + weight. LIME applications should be continued during this interval for a pH of 9.0-10.0, in addition, to flocculate solids and to minimize corrosion. Additions of CAUSTIC SODA may be needed to maintain pH at 9-10.
4400' -TD	Weight: 9.1 – 10.3 ppg Viscosity: 30 – 32 sec/qt Plastic Viscosity: 3-10 cps Yield Point: 4-6 lbs/100' pH: 9-10 Filtrate: 10-15 cm/30 min Solids: <2-4 % volume Chloride: < 170K mg/L	From 4400' to Total Depth, it is recommended the system be restricted to the steel pits, and, with Brine, mud up as follows: while circulating through the steel pits, add 3-4 #/bbl IMPERMX (starch) to lower fluid loss below 15 cc. If lost circulation is encountered, mix a viscous pit of mud and add 15 ppb LCM (Add 5#/bbl of the following: BARASEAL, HYSEAL & PLUG-GIT) and continue to drill. Sweep the hole with a viscous pill prior to coming out of the hole to log

VI. Proposed Control Equipment:

Will install on the 8 5/8" surface casing a 9" x 3000 psi WP Double Ram BOP and will test before drilling out of surface casing. **As expected pressures will not exceed 2000 psi, we request a waiver of the remote control requirement on the accumulator of the 3M BOP and a variance to run a 2M BOP, if available, and to test to 1500 psi using rig pumps.** See Exhibit "H" for BOP layout.

VII. Auxiliary Equipment:

- 9" x 3000 psi double BOP/blind & pipe ram **(2M BOP if available)**
- 41/2" x 3000 psi Kelly valve
- 9" x 3000 psi mud cross – H₂S detector on production hole
- Gate-type safety valve 3" choke line from BOP to manifold
- 2" adjustable chokes – 3" blowdown line

VIII A. Testing Program: None planned

B. Logging Program: The following logs may be run:

CNL, LDT, GR, CAL, DLL, MSFL, NGT from TD-14002400'

CNL, GR from TD-Surface

C. Coring Program: None planned

IX. No abnormal pressures or temperatures are anticipated. In the event abnormal pressures are encountered, however, the proposed mud program will be modified to increase the mud-weight. The estimated maximum bottom hole pressure is 1980 psi.

EXHIBIT "B"
ELLIOTT B #9

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

No H₂S is anticipated.

EXHIBIT "C"

SURFACE USE AND OPERATIONS PLAN
CULTURAL RESOURCES SURVEY
APPROXIMATE REHABILITATION SCHEDULE

LOCALITY: **ELLIOTT B #9**
OPERATOR: **APACHE CORPORATION**

LOCATION: SE¼SE¼ OF SECTION 6, T22S-R37E, N.M.P.M.
LEA COUNTY, NEW MEXICO

SUBMITTED TO:

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
ROSWELL DISTRICT OFFICE
2909 WEST 2ND STREET
ROSWELL, NEW MEXICO 88201
TELEPHONE (505) 627-0272

This plan is submitted to provide permitting agencies with information necessary to allow an appraisal of the environmental effects associated with the proposed drilling operations. Within the context of typical drilling operations, this plan provides for protection of surface resources and other environmental components. This plan has been developed in conformity with the United States Geological Survey NTL-6 guidelines, Bureau of Land Management Oil and Gas Order No. 1, and in connection and consultation with the private surface owner of record, if other than the United States of America, as well as the Roswell District Office for the Bureau of Land Management and the United States Department of the Interior personnel.

PART #1:

- 1) Surface Location:
SE¼SE¼ of Section 6, Township 22 South, Range 37 East, N.M.P.M.
Lea County, New Mexico
330 ' FSL, 330'FEL, Unit P
See attached Exhibits "D" and "E"
- 2) Bottom Hole Location:
SE¼SE¼ of Section 6, Township 22 South, Range 37 East, N.M.P.M.
Lea County, New Mexico
330 ' FSL, 330'FEL, Unit P
See attached Exhibits "D" and "E"
- 3) Leases Issued: NMLC-032573-B
- 4) Record Lessee:

Amoco Production Company	50%
Conoco, Inc.	25%
Chevron USA, Inc.	25%

- 5) Acres in Lease:
Township 22 South, Range 37 East, NMPM
Section 6: SE $\frac{1}{4}$
Section 7: NE $\frac{1}{4}$
Section 17: NE $\frac{1}{4}$ NE $\frac{1}{4}$
Containing 360.00 acres, more or less
- 6) Acres Dedicated to Well:
There are 40.00 acres dedicated to this well, which takes in the SE $\frac{1}{4}$ SE $\frac{1}{4}$ of Section 6, Township 22 South, Range 37 East, N.M.P.M., Lea County, New Mexico.

PART #2:

- 1) Existing Roads:
Exhibits "E-1" & "E-2" comprise maps showing the proposed well site in relation to existing roads. The well is ± 2 miles southwest of Eunice, New Mexico. From Eunice, go south on S. Legion approximately 1.75 miles. Turn West and continue along access road ± 1 mile. Turn North on new access road to location as illustrated on Exhibit "E-2".
- 2) Planned Access:
A. Length and Width: A new 360' access road, 20' wide, will be constructed from the exiting lease/access road to the well site. Extra width may be needed in the turns. Application for a buried pipeline right-of-way will be made in the near future.
B. Construction: The new road will be 20' wide with a center crown, with 6 inches compacted caliche. The existing roads will be lightly graded and topped with compacted caliche as needed.
C. Turnouts: None required.
D. Culverts: None required.
E. Cuts and Fills: As needed.
F. Gates and Cattleguards: None required.
- 3) Location of Existing Wells:
Exhibit "F" shows existing wells within a 1-mile radius of the proposed well.
- 4) Location of Existing and/or Proposed Facilities:
A. There are production facilities within the area of the ELLIOTT B #9 lease.
B. If the oil well proves to be commercial, any necessary production facilities will be installed on the drilling pad, and pipelines will be installed.
- 5) Location and Type of Water Supply:
Apache Corporation plans to drill the proposed well with fresh and brine water which will be transported by truck over proposed and existing access roads.
- 6) Source of Construction Materials:
Caliche for surfacing access roads and the wellsite pad will be obtained from the location itself or from BLM pits in the area.
- 7) Method of Handling Waste Material:
A. Drill cuttings will be disposed of in the reserve pits.
B. Drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry.
C. All pits will be fenced with normal fencing materials to prevent livestock from entering the area.
D. Water produced during operations will be collected in tanks until hauled to an approved disposal system.
E. Oil produced during operation will be stored in tanks until sold.
F. Apache Corporation will comply with current laws and regulations pertaining to the disposal of human waste.
G. All waste materials will be contained to prevent scattering by the wind and will be removed from the well site within 30 days after drilling and/or completion operations are finished.
- 8) Ancillary Facilities: None planned.
- 9) Well Site Layout:

- A. Exhibit "G" shows the relative location and dimensions of the well pad, reserve pits, and major rig components. The pad and pit area have been staked and flagged.
 - B. Mat Size: 170' x 240' plus reserve pits as shown on Exhibit "G".
 - C. Cut & Fill: Only minor leveling of the drilling site is anticipated.
 - D. The surface will be topped with compacted caliche and the reserve pits will be lined with 6 mil plastic.
- 10) Plans for Restoration of the Surface:
- A. After completion of drilling and/or completion operations, all equipment and other material, not needed for operations, will be removed. Pits will be filled and the location cleaned of all trash and junk to leave the well site in as aesthetically pleasing a condition as possible.
 - B. Any unguarded pits containing fluids will be fenced until they are filled.
 - C. If the proposed well is non-productive, Apache Corporation will comply with all rehabilitation and/or vegetation requirements of the Bureau of Land Management, and such rehabilitation will be accomplished as expeditiously as possible. All pits will be filled and leveled within 90 days after abandonment.
- 11) Other Information:
- A. Topography: The wellsite and access road are located in the Querecho Plains and are relatively flat.
 - B. Soil: The proposed location, access road and production facilities consist of sandy soil. Slope in the proposed area ranges from zero (0) to five (5) degrees.
 - C. Flora and Fauna: Vegetation is one of a grassland environment and a scrub-grass, scrub disclimax community. The wildlife consists of rabbits, coyotes, rattlesnakes, lizards, dove, quail and other wildlife typical of the semi-arid desert land.
 - D. Ponds and Streams: There are no ponds, lakes, streams or feeder creeks in the immediate area.
 - E. Residences and Other Structures: There are no occupied residences or other structures on or near the proposed location.
 - F. Land Use: The land is used for grazing cattle.
 - G. Surface Ownership: The surface is owned by the McNeill Ranch, c/o Page McNeill , P. O. Box 1092 , Hobbs, New Mexico 88240, 505-393-3386. A Surface Damage Release agreement for this tract has been executed by the McNeill Ranch and Apache Corporation.
 - H. Archaeological, Historical, and Other Cultural Sites:

Don Clifton, Archaeological Consultant, of Pep, New Mexico, will be conducting an archaeological survey of the proposed ELLIOTT B #9 well which covers the drilling location and access road, including a corridor along said access road for power. His report will be filed under separate cover.
 - I. Senior Representative (Manager, Engineering & Production):

Ross Murphy
Apache Corporation
Suite 1500 – Two Warren Place
6120 South Yale Avenue
Tulsa, Oklahoma 74136
(918) 491-4834


Project (Operations Engineer):
Rick Crist
Apache Corporation
Suite 1500 – Two Warren Place
6120 South Yale Avenue
Tulsa, Oklahoma 74136
(918) 491-4972

Drilling Operations (Operations Engineer):

Mohamed El-Ahmady
Apache Corporation
Suite 1500 – Two Warren Place
6120 South Yale Avenue
Tulsa, Oklahoma 74136
(918) 491-4977

CERTIFICATION

I hereby certify that Apache Corporation has inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in the plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by Apache Corporation and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

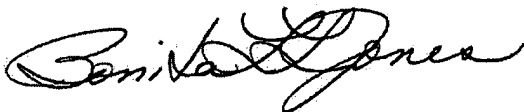


Bonita L. L. Jones, RLP, Consulting Landman
Agent for Apache Corporation
P. O. Box 8309
Roswell, New Mexico 88202-8309
(505) 624-9799 FAX (505) 624-9799
E-Mail: bonita@dfn.com

Date: 12-17-04

Exhibit F


Elliott B #9
Salt Water Disposal Well

Township 22 South, Range 37 East, NMPM
Sec. 6: SE/4SE/4 (330' FSL, 330' FEL)

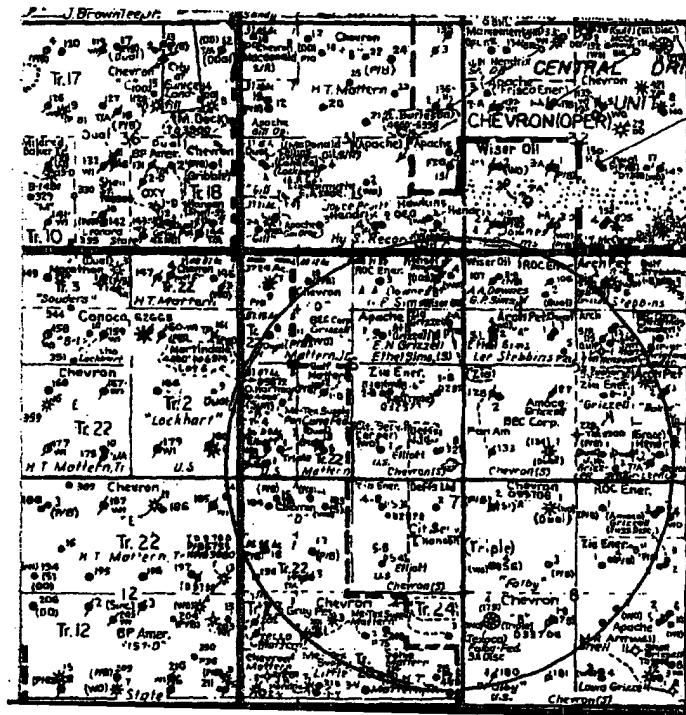

CapStar Drilling, Inc.
LOCATION SPECIFICATIONS AND RIG LAYOUT
FOR EARTH PITS

EXHIBIT G

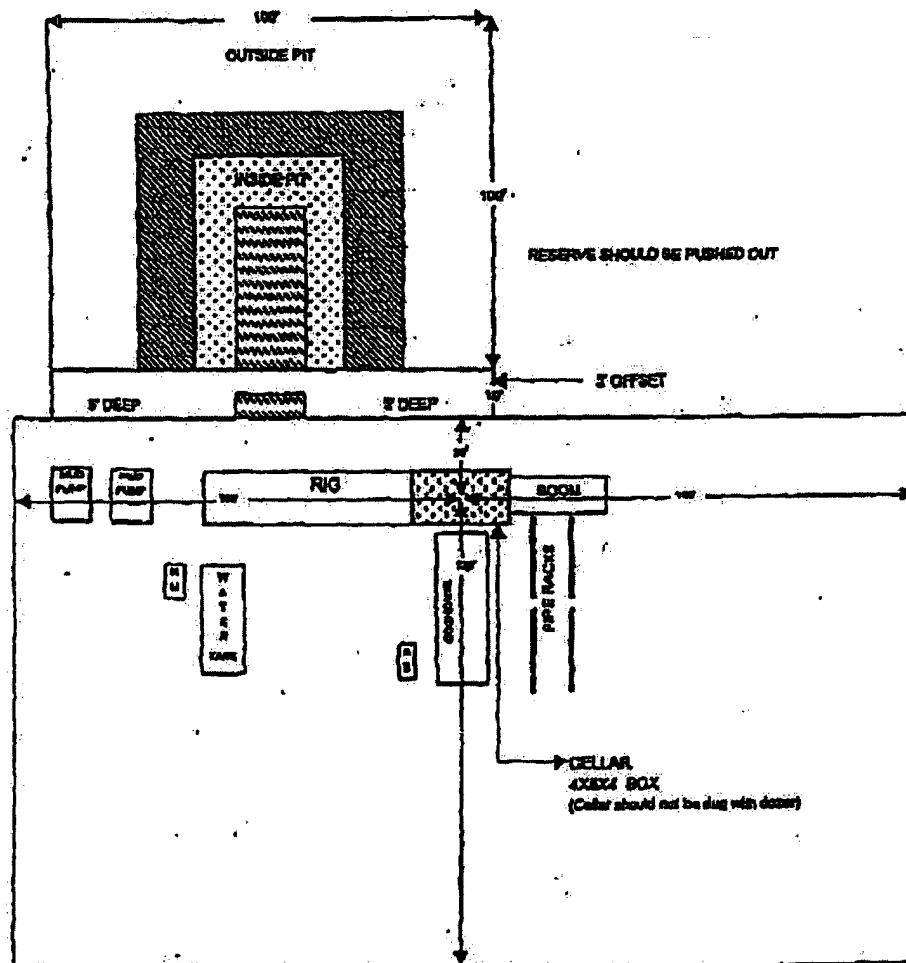

Cellar can be 4X4X4 if using a screw-on wellhead
Working Pits dug 5' below ground level


CAPSTAR DRILLING INC

BOP SCHEMATIC 9" X 3000 psi


EXHIBIT "H"

*Note: If BOP is equipped w/ side outlets below the rams, a spool is not required.

3000 psi WP Double Ram
Blow-out Preventor. Must be tested
to 1000 psi prior to drilling out
8-6/8" surface casing.

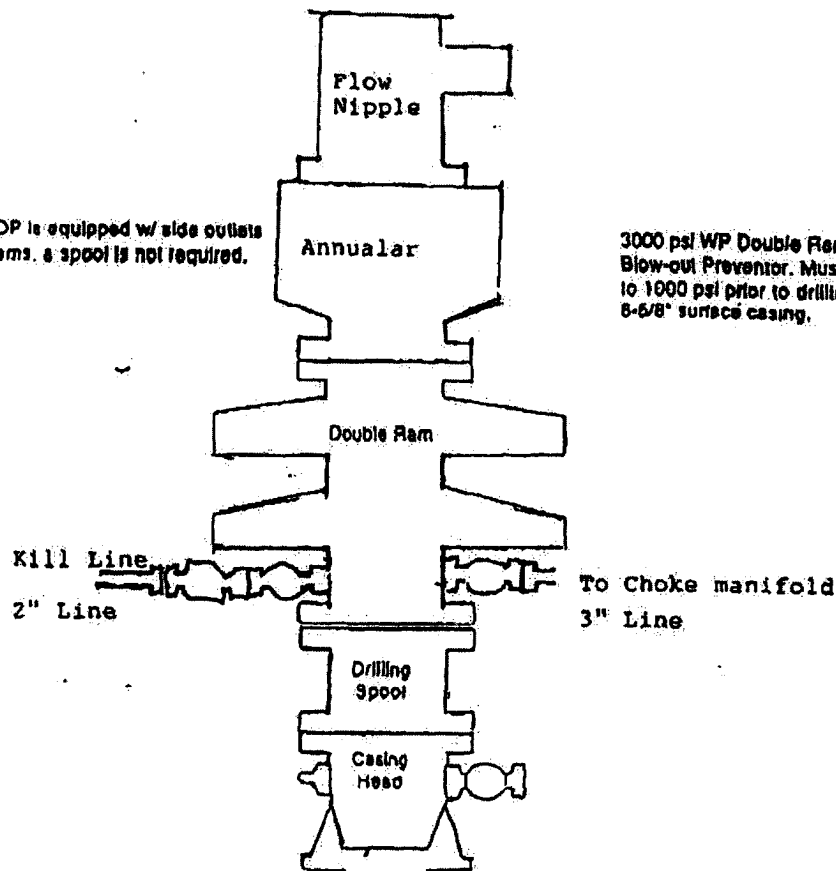

Choke Manifold Schematic

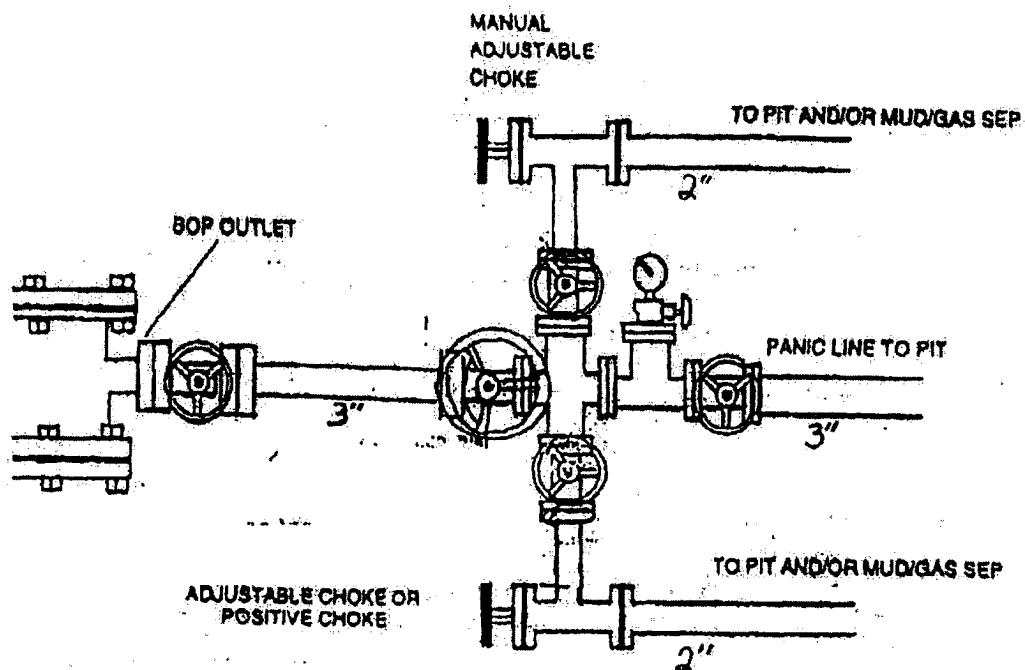

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
July 29, 2004

For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Pit or Below-Grade Tank Registration or Closure

Is pit or below-grade tank covered by a "general plan"? Yes ☐ No ☒

Type of action: Registration of a pit or below-grade tank ☒ Closure of a pit or below-grade tank ☐

Operator: Apache Corporation Telephone: (918) 491-4900 e-mail address: glenn.bone@apachecorp.com
Address: Two Warren Place, Suite 1500, 6120 S. Yale Tulsa Oklahoma 74136-4224
Facility or well name: Elliot R #9 API #: 30-025-37842 U/L or Q/L or P Sec 6 T. 22S R. 37E
County: Lea Latitude 32°24'51.75"N Longitude 103°11'39.36"W NAD: 1927 ☒ 1983 ☐ Surface Owner Federal ☒ State ☐ Private ☐ Indian ☐

Pit Type: Drilling <input checked="" type="checkbox"/> Production <input type="checkbox"/> Disposal <input type="checkbox"/> Workover <input type="checkbox"/> Emergency <input type="checkbox"/> Lined <input checked="" type="checkbox"/> Unlined <input type="checkbox"/> Inner type: Synthetic <input checked="" type="checkbox"/> Thickness <u>12</u> mil Clay <input type="checkbox"/> Volume <u>7105</u> bbl	Below-grade tank Volume: _____ bbl Type of fluid: _____ Construction material: _____ Double-walled, with leak detection? Yes <input type="checkbox"/> If not, explain why not: _____	
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet	(20 points)
	50 feet or more, but less than 100 feet -- 70 ft	(10 points) 10 Pts
	100 feet or more	(0 points)
Wellhead protection area: (Less than 200 feet from a private domestic water source, or less than 1000 feet from all other water sources.)	Yes	(20 points)
	No	(0 points)
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet	(20 points)
	200 feet or more, but less than 1000 feet	(10 points)
	1000 feet or more	(0 points)
Ranking Score (Total Points)		10 Points

If this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: onsite ☐ offsite ☐ If offsite, name of facility: _____ (3) Attach a general description of remedial action taken including remediation start date and end date. (4) Groundwater encountered: No ☐ Yes ☐ If yes, show depth below ground surface: _____ ft. and attach sample results. (5) Attach soil sample results and a diagram of sample locations and excavations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐, or an (attached) alternative OCD-approved plan ☐.

Date: 1/11/2005

Printed Name/Title: Glenn Bone - Drilling Engineer

Signature: [Signature]

Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.

Approval:

Date: JAN 12 2005

Printed Name/Title:

PETROLEUM ENGINEER


Signature: [Signature]

Elliott B #9 - Mud Pits

Sec. 6, T 22S, R 37 E
Lea County, NM



Top Soil pushed back off of Reserve pit prior to digging pits

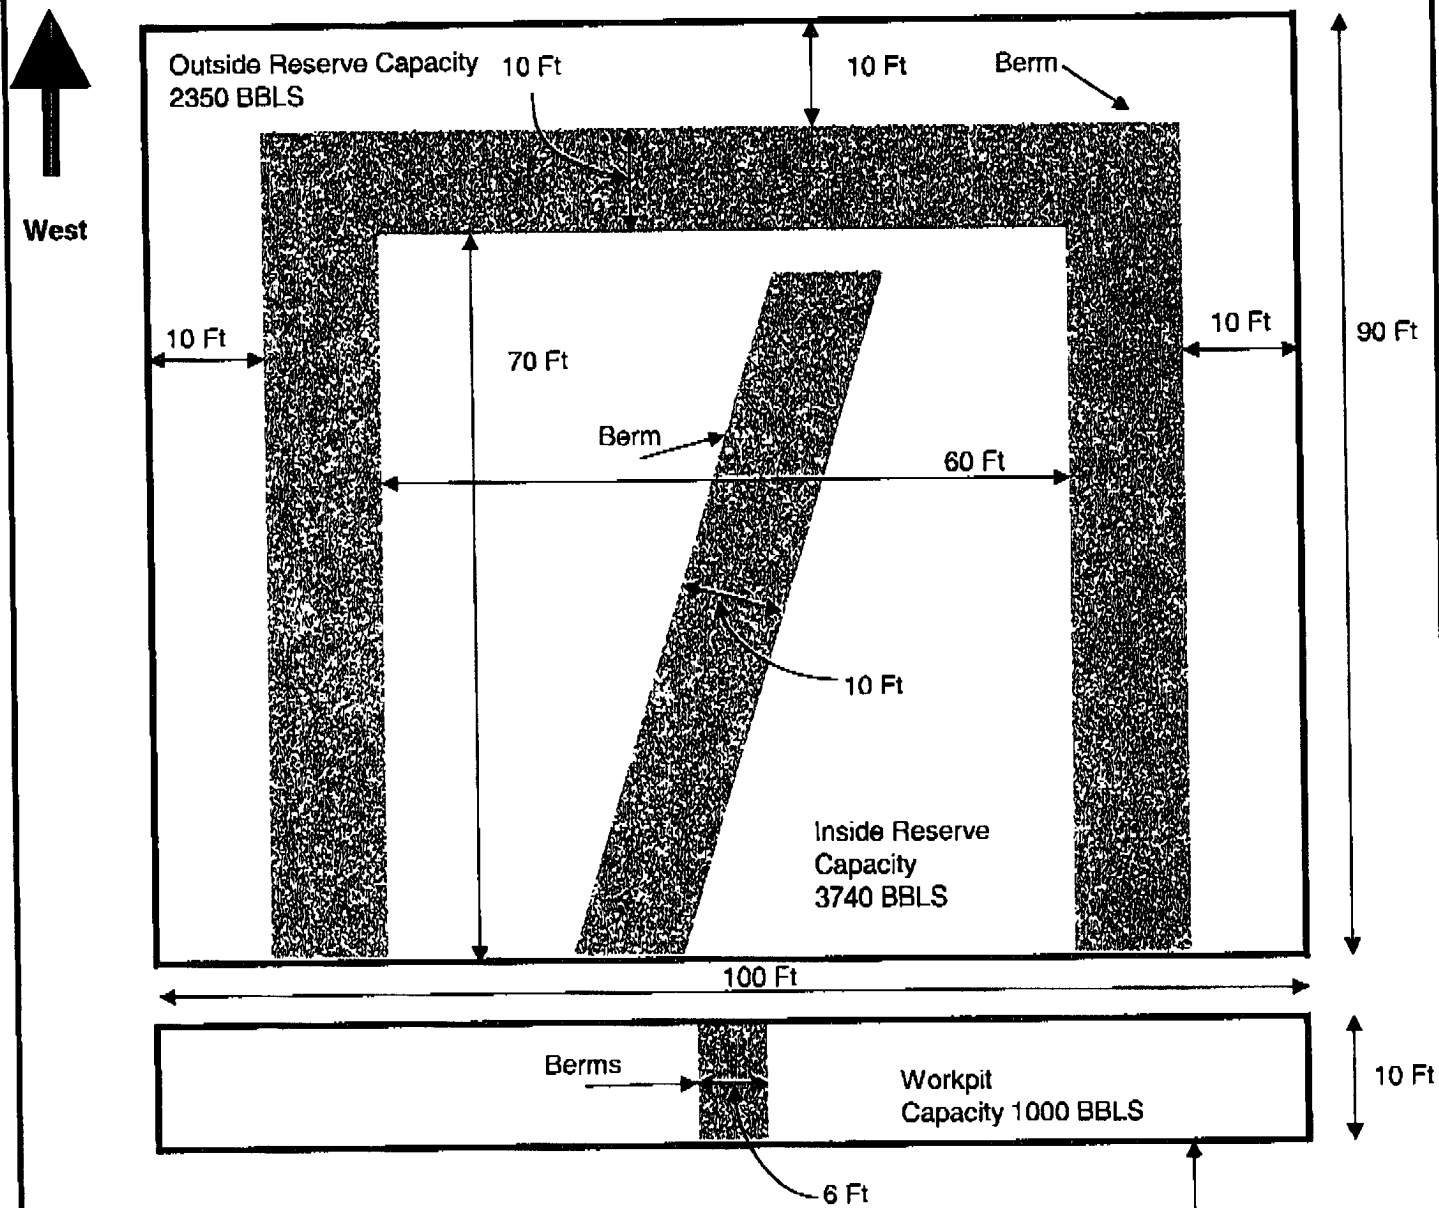

Outside Dimension of reserve Pit is 100 Ft x 90 Ft

Elevation of Pit Sides - 2 Ft Above Ground Level

Pits are dug 4 Ft below ground

Pit walls are sloped on a 3 to 1 ratio

Wellhead