

N.M. Oil Cons. DIV-Dist. 2
1301 W. Grand Avenue
Artesia, NM 88210

Form 3160-3
(August 1999)

860

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

AUG 29 2005

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No.
NMN71016-27A

6. If Indian, Allottee or Tribe Name

1a. Type of Work: ☒ DRILL ☐ REENTER

7. If Unit or CA Agreement, Name and No.
NMN71016

1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☐ Single Zone ☐ Multiple Zone

8. Lease Name and Well No. 1796
POKER LAKE UNIT 241

2. Name of Operator
Bass Enterprises Production Co.

9. API Well No.
30-015-34308

3a. Address P. O. Box 2760 Midland, TX 79702

3b. Phone No. (include area code)
(432)683-2277

10. Field and Pool, or Exploratory
NASH DRAW - DELAWARE

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface SWSE, UL O, 840 FSL, 2030 FEL, LAT 32.11007, LON 103.55083
At proposed prod. zone SAME

11. Sec., T., R., M., or Blk, and Survey or Area
SEC 30, T24S, R30E, MER NMP

14. Distance in miles and direction from nearest town or post office*
14 MILES EAST OF MALAGA NM

12. County or Parish
EDDY

13. State
NM

15. Distance from proposed* location to nearest property or lease line, ft.
(Also to nearest drig. unit line, if any)
840'

16. No. of Acres in lease
1922

17. Spacing Unit dedicated to this well
40.00

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.
1227'

19. Proposed Depth
7650' MD 7650' TVD

20. BLM/BIA Bond No. on file

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
3198

22. Approximate date work will start*
09/01/2005

23. Estimated duration
12 DAYS

24. Attachments CARLSBAD CONTROLLED WATER BASIN

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operation certification.
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature *Cindi Goodman* Name (Printed/Typed) Cindi Goodman Date 06/23/2005

Title
Production Clerk

Approved by (Signature) /s/ Joe G. Lara Name (Printed/Typed) /s/ Joe G. Lara Date AUG 24 2005

Title ACTING FIELD MANAGER Office CARLSBAD FIELD OFFICE

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

APPROVAL FOR 1 YEAR

Title 18 U.S.C Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States and false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

5-17
79.5

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS
AND SPECIAL STIPULATIONS
ATTACHED

Witness Surface Casing.

Surface casing to be set into the Rustler below all fresh water sands.

Production casing will be cemented using Zone Seal cement.

Drilling Procedure, BOP Diagram, Anticipated tops and surface plans attached.

This well is located outside the Secretary's Potash area and outside the R-111 Potash area. There are no potash leases within 1 mile of the location.

Form C-102
Revised March 17, 1999

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

2040 South Pacheco
Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number		Pool Code	Pool Name
		47545	NASH DRAW DELAWARE
Property Code	Property Name		Well Number
001796	POKER LAKE UNIT		241
OGRID No.	Operator Name		Elevation
001801	BASS ENTERPRISES PRODUCTION COMPANY		3198'



Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
0	30	24 S	30 E		840	SOUTH	2030	EAST	EDDY


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40	Joint or Infill N	Consolidation Code			Order No.				

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

<p>LOT 1 40.12 ACRES</p>				<p>OPERATOR CERTIFICATION</p> <p><i>I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.</i></p> <p><u><i>W.R. Dannels</i></u> Signature</p> <p><u>W.R. DANNELS</u> Printed Name</p> <p><u>DIVISION DRILLING SUPT.</u> Title</p> <p>_____ Date</p>
	81.34 ACRES	162.26 ACRES		
<p>LOT 2 40.16 ACRES</p>				
<p>LOT 3 40.20 ACRES</p>		<p>LAT - N32°11'00.7" LONG - W103°55'08.3"</p>		
			162.27 ACRES	<p>SURVEYOR CERTIFICATION</p> <p><i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i></p> <p><u>JUNE 06, 2005</u> Date Surveyed</p> <p><u>GARY L. JONES</u> Signature & Seal Professional Surveyor</p> <p></p> <p>Certificate No. <u>5388</u></p> <p><u>GARY L. JONES</u> Professional Surveyor 1977</p> <p>BASIN SURVEYS</p>
<p>LOT 4 40.24 ACRES</p>	81.18 ACRES			

SECTION 30, TOWNSHIP 24 SOUTH, RANGE 30 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

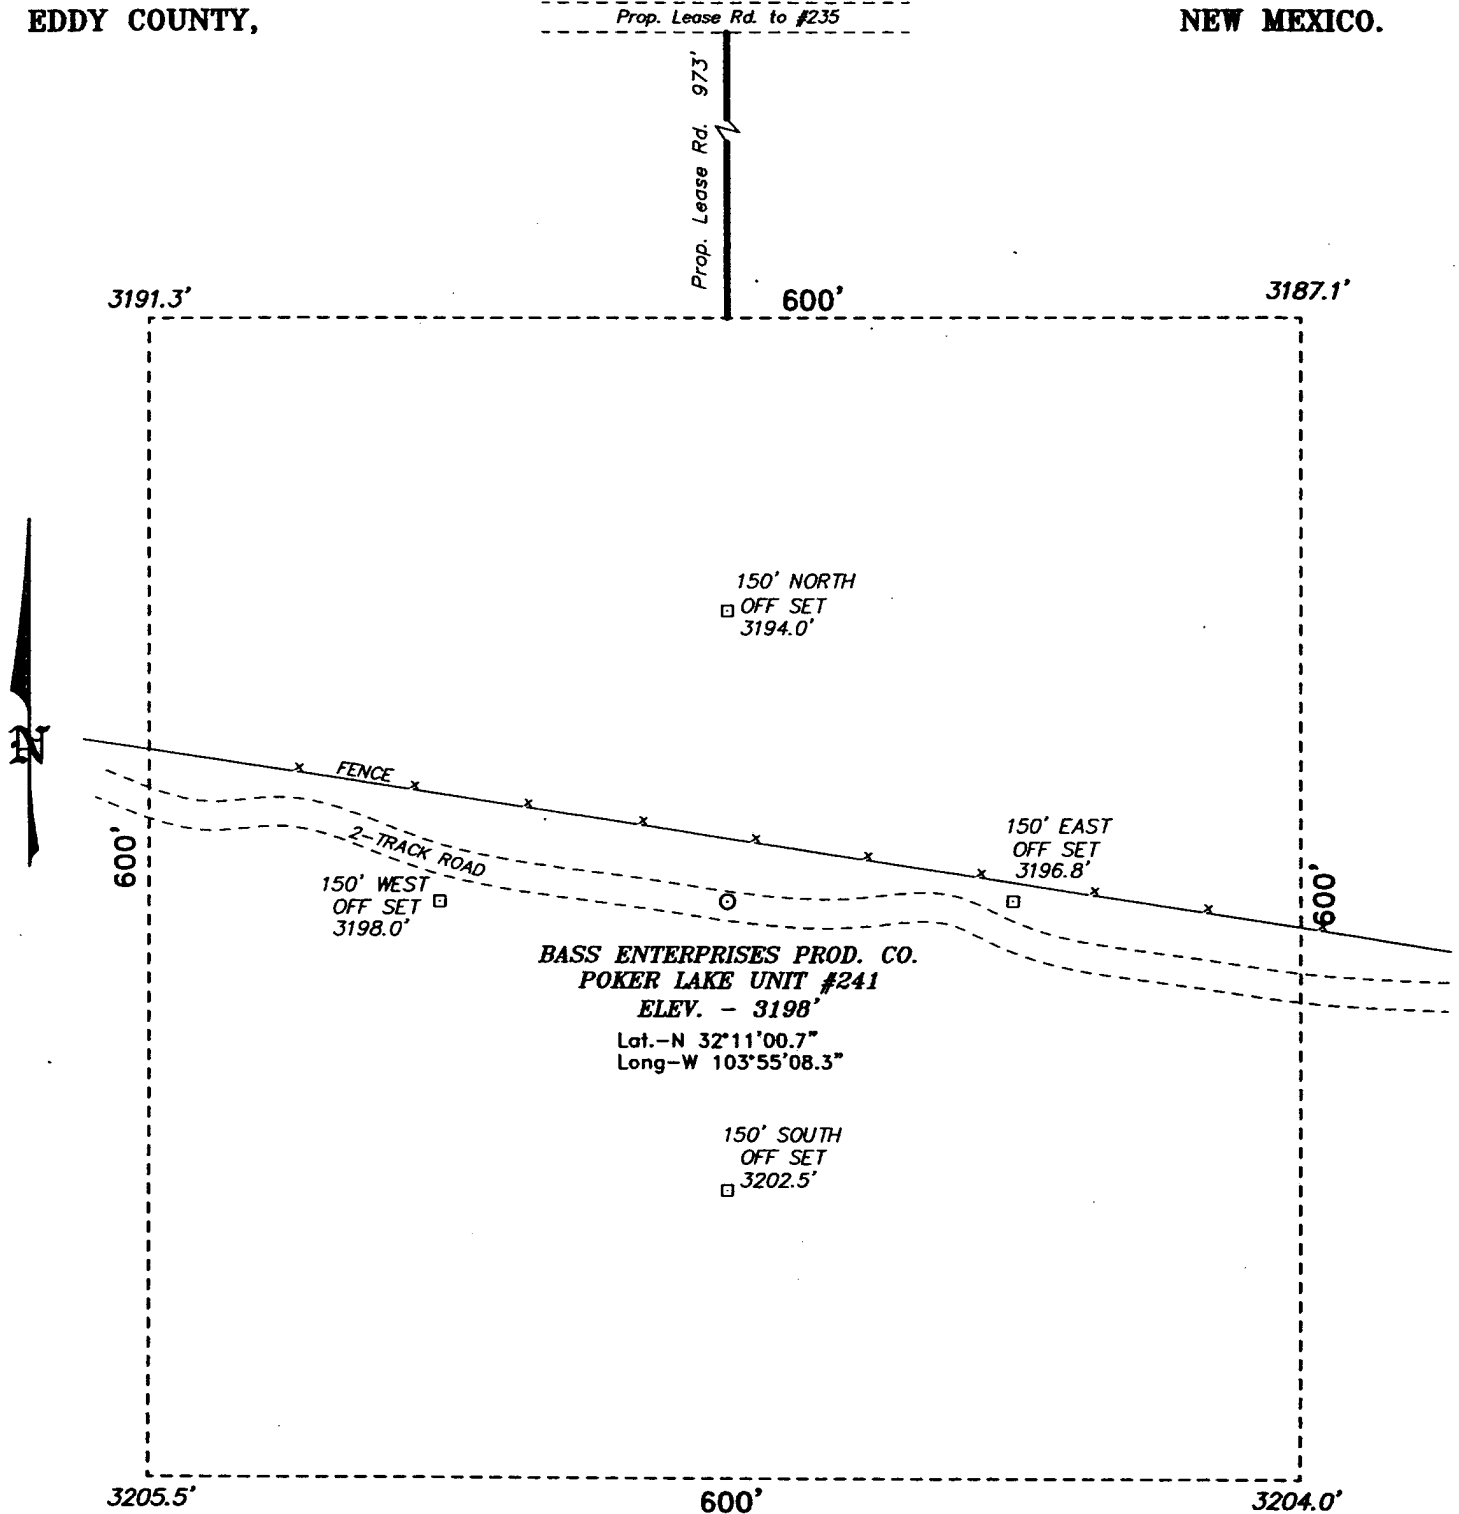

DIRECTIONS TO LOCATION:

FROM THE JUNCTION OF STATE HWY 128 AND
RAWHIDE ROAD, GO SOUTH FOR 10.2 MILES TO OLD
WINDMILL; THENCE WEST FOR 0.2 MILE; THENCE
SOUTHEAST FOR 1.8 MILE PAST A CATTLE GUARD;
THENCE WEST FOR 0.2 MILE TO WELL #227 AND
PROPOSED LEASE ROAD.

BASS ENTERPRISES PRODUCTION CO.

REF: POKER LAKE UNIT No. 241 / Well Pad Topo

THE POKER LAKE UNIT No. 241 LOCATED 840' FROM
THE SOUTH LINE AND 2030' FROM THE EAST LINE OF
SECTION 30, TOWNSHIP 24 SOUTH, RANGE 30 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.

BASIN SURVEYS P.O. BOX 1786 - HOBBS, NEW MEXICO

W.O. Number: 5388

Drawn By: K. GOAD

Date: 06-07-2005 Disk: KJG CD#7 - 5388A.DWG

Survey Date: 06-06-2005

Sheet 1 of 1 Sheets

**EIGHT POINT DRILLING PROGRAM
BASS ENTERPRISES PRODUCTION CO.**

NAME OF WELL: Poker Lake Unit #241

LEGAL DESCRIPTION - SURFACE: 840' FSL & 2030' FEL, Section 30, T-24-S, R-30-E, Eddy County, New Mexico.

POINT 1: ESTIMATED FORMATION TOPS

(See No. 2 Below)

POINT 2: WATER, OIL, GAS AND/OR MINERAL BEARING FORMATIONS

Anticipated Formation Tops: KB 3218' (est) GL 3198'

<u>FORMATION</u>	<u>ESTIMATED TOP FROM KB</u>	<u>ESTIMATED SUBSEA TOP</u>	<u>BEARING</u>
T/Rustler	Not Present		
T/Salt	248'	+2970'	Barren
T/Ramsey Sand	3526'	-308'	Oil/Gas
T/Lwr Brushy Canyon "8" A	7023'	-3805'	Oil/Gas
TD	7650'	-4432'	

POINT 3: CASING PROGRAM

<u>TYPE</u>	<u>INTERVALS</u>	<u>PURPOSE</u>	<u>CONDITION</u>
16"	0'- 40'	Conductor	Contractor Discretion
11-3/4", 42#, H-40, ST&C	0'- 240'	Surface	New
8-5/8", 32#, J-55, LT&C	0'- 3490'	Intermediate	New
5-1/2", 15.5#, J-55, LT&C	0' -6300'	Production	New
5-1/2", 17#, J-55, LT&C	6300' -7650'	Production	New

WITNESS

*If there is no flowing sand or Loss Circulation this string will not be run.

POINT 4: PRESSURE CONTROL EQUIPMENT (SEE ATTACHED DIAGRAM)

A BOPE equivalent to requirements of Onshore Oil & Gas Order No. 2 – 2000 psi system (Diagram 1) will be nipped up on the surface casing head. The BOP stack, choke, kill lines, kelly cocks, inside BOP, etc. when installed on the surface casing head will be hydro-tested to 70% of internal yield pressure of casing or 1000 psig whichever is less with the rig pump. The BOPE when rigged up on the intermediate casing spool will be as described in Diagram 2 and will be tested to 3000 psig by independent tester. (As per Onshore Oil & Gas Order No 2 – 3000 psig system) In addition to the high pressure test, a low pressure (200 psig) test will be required. These tests will be performed: These tests will be performed:

These tests will be performed:

- a) Upon installation
- b) After any component changes
- c) Fifteen days after a previous test
- d) As required by well conditions

A function test to insure that the preventers are operating correctly will be performed on each trip.

POINT 5: MUD PROGRAM

DEPTH	MUD TYPE	WEIGHT	FV	PV	YP	FL	Ph
0' - 240'	FW Spud Mud	8.5 - 9.2	38-70	NC	NC	NC	10.0
240' - 3490'	Brine Water	9.8 - 10.2	28-30	NC	NC	NC	9.5 - 10.5**
3490' - 6000'	FW	8.8 - 9.2	30-34	NC	NC	NC	9.5 - 10.5**
6000' - 6900'	FW/Starch	8.8 - 9.2	30-34	8	2	<100 cc	9.5 - 10.5**
6900' - TD	FW/Starch	8.8 - 9.2	30-34	8	2	<25 cc	9.5 - 10.5**

**** If there is no intermediate casing set @ 3490', the drilling fluid will be 10 ppg BW to 5600' where it will be converted to BW/Diesel with properties as follows: 8.8 – 9 ppg, 32 – 40 funnel secs vis, YP2, PV 8, FL 25 cc or less, Ph 9.5 – 10.**

NOTE: May increase vis for logging purposes only.

POINT 6: TECHNICAL STAGES OF OPERATION

A) TESTING

None anticipated.

B) LOGGING

GR-CNL-LDT-AIT from TD to base of Salt (+/- 3300').
GR-CNL-CAL from base of Salt to surface.

C) CONVENTIONAL CORING

None anticipated.

D) CEMENT

INTERVAL	AMOUNT SXS	FT OF FILL	TYPE	GALS/SX	PPG	FT ³ /SX
SURFACE:						
Lead 0 – 240' (100% excess circ to surface)	300	240	Prem Plus + 2% CaCl ₂ + ¼# Flocele	6.33	14.8	1.35
INTERMEDIATE:						
Lead 1000' – 3190' (200% excess)	800	2190	Interfill C	14.11	11.9	2.45
Tail 3190' – 3490' (200% excess)	200	300	Prem Plus + 2% CaCl ₂	6.37	14.8	1.35
PRODUCTION:						
Base Slurry w/nitrogen 2997-7650' (50% excess)	775	4603	Premium Plus + 2% Zone Sealant 2000	6.76	9.1-14.5	2.3-1.39

Nitrogen
300/600
scf/bbl

COMPRESSIVE
Strength
1200

E) DIRECTIONAL DRILLING

No directional services anticipated.

POINT 7: ANTICIPATED RESERVOIR CONDITIONS

Normal pressures are anticipated throughout Delaware section. A BHP of 3285 psi (max) or MWE of 8.7 ppg is expected. Lost circulation may exist in the Delaware Section from 3526'-7650'. No H₂S is anticipated.

POINT 8: OTHER PERTINENT INFORMATION**A) Auxiliary Equipment**

Upper and lower kelly cocks. Full opening stab in valve on the rig floor.

B) Anticipated Starting Date

Upon approval

12 days drilling operations

14 days completion operations

GEG/cdg
June 23, 2005

MULTI-POINT SURFACE USE PLAN

NAME OF WELL: Poker Lake Unit #241

LEGAL DESCRIPTION - SURFACE: 840 FSL & 2030' FEL, Section 30, T-24-S, R-30-E, Eddy County, New Mexico.

POINT 1: EXISTING ROADS

A) Proposed Well Site Location:

See Exhibit A and Survey Plats

B) Existing Roads:

From Carlsbad, New Mexico, go 8 miles south on Highway 285 to Highway 31. Turn north and go 7 miles on Highway 31. Turn east on Highway 128 and go 4 miles to Rawhide Road (located between mile markers 4 and 5). Go south for 10.2 miles to old windmill, then west for 0.2 mile, then southeast 1.8 miles, then westerly for 0.2 miles to Poker Lake Unit #227.

C) Existing Road Maintenance or Improvement Plan:

See Exhibit B and Survey Plats.

POINT 2: NEW PLANNED ACCESS ROUTE

A) Route Location:

Approximately 973' of new road is required.

B) Width

12'

C) Maximum Grade

Grade to match existing topography or as per BLM requirements.

D) Turnout Ditches

Spaced per BLM requirements.

E) Culverts, Cattle Guards, and Surfacing Equipment

If required, culverts and cattle guards will be set per BLM Specs.

POINT 3: LOCATION OF EXISTING WELLS

Exhibit A indicates existing wells within the surrounding area.

POINT 12: OPERATOR'S FIELD REPRESENTATIVE

Page 6

(Field personnel responsible for compliance with development plan for surface use).

DRILLING

William R. Dannels
Box 2760
Midland, Texas 79702
(432) 683-2277

PRODUCTION

Mike Waygood
3104 East Green Street
Carlsbad, New Mexico 88220
(505) 887-7329

Kent A. Adams
Box 2760
Midland, Texas 79702
(432) 683-2277


POINT 13: CERTIFICATION

I hereby certify that I, or persons under my direct supervision have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in the plan are, to the best of my knowledge, true and correct; and that the work associated with operations proposed herein will be performed by Bass Enterprises Production Co. and it's contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

6-28-05

Date


GEG/cdg

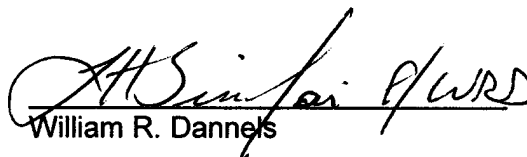
William R. Dannels


BASS ENTERPRISES PRODUCTION COMPANY

Poker Lake Unit #
Grey Wolf Rig 15

EXHIBIT "D"

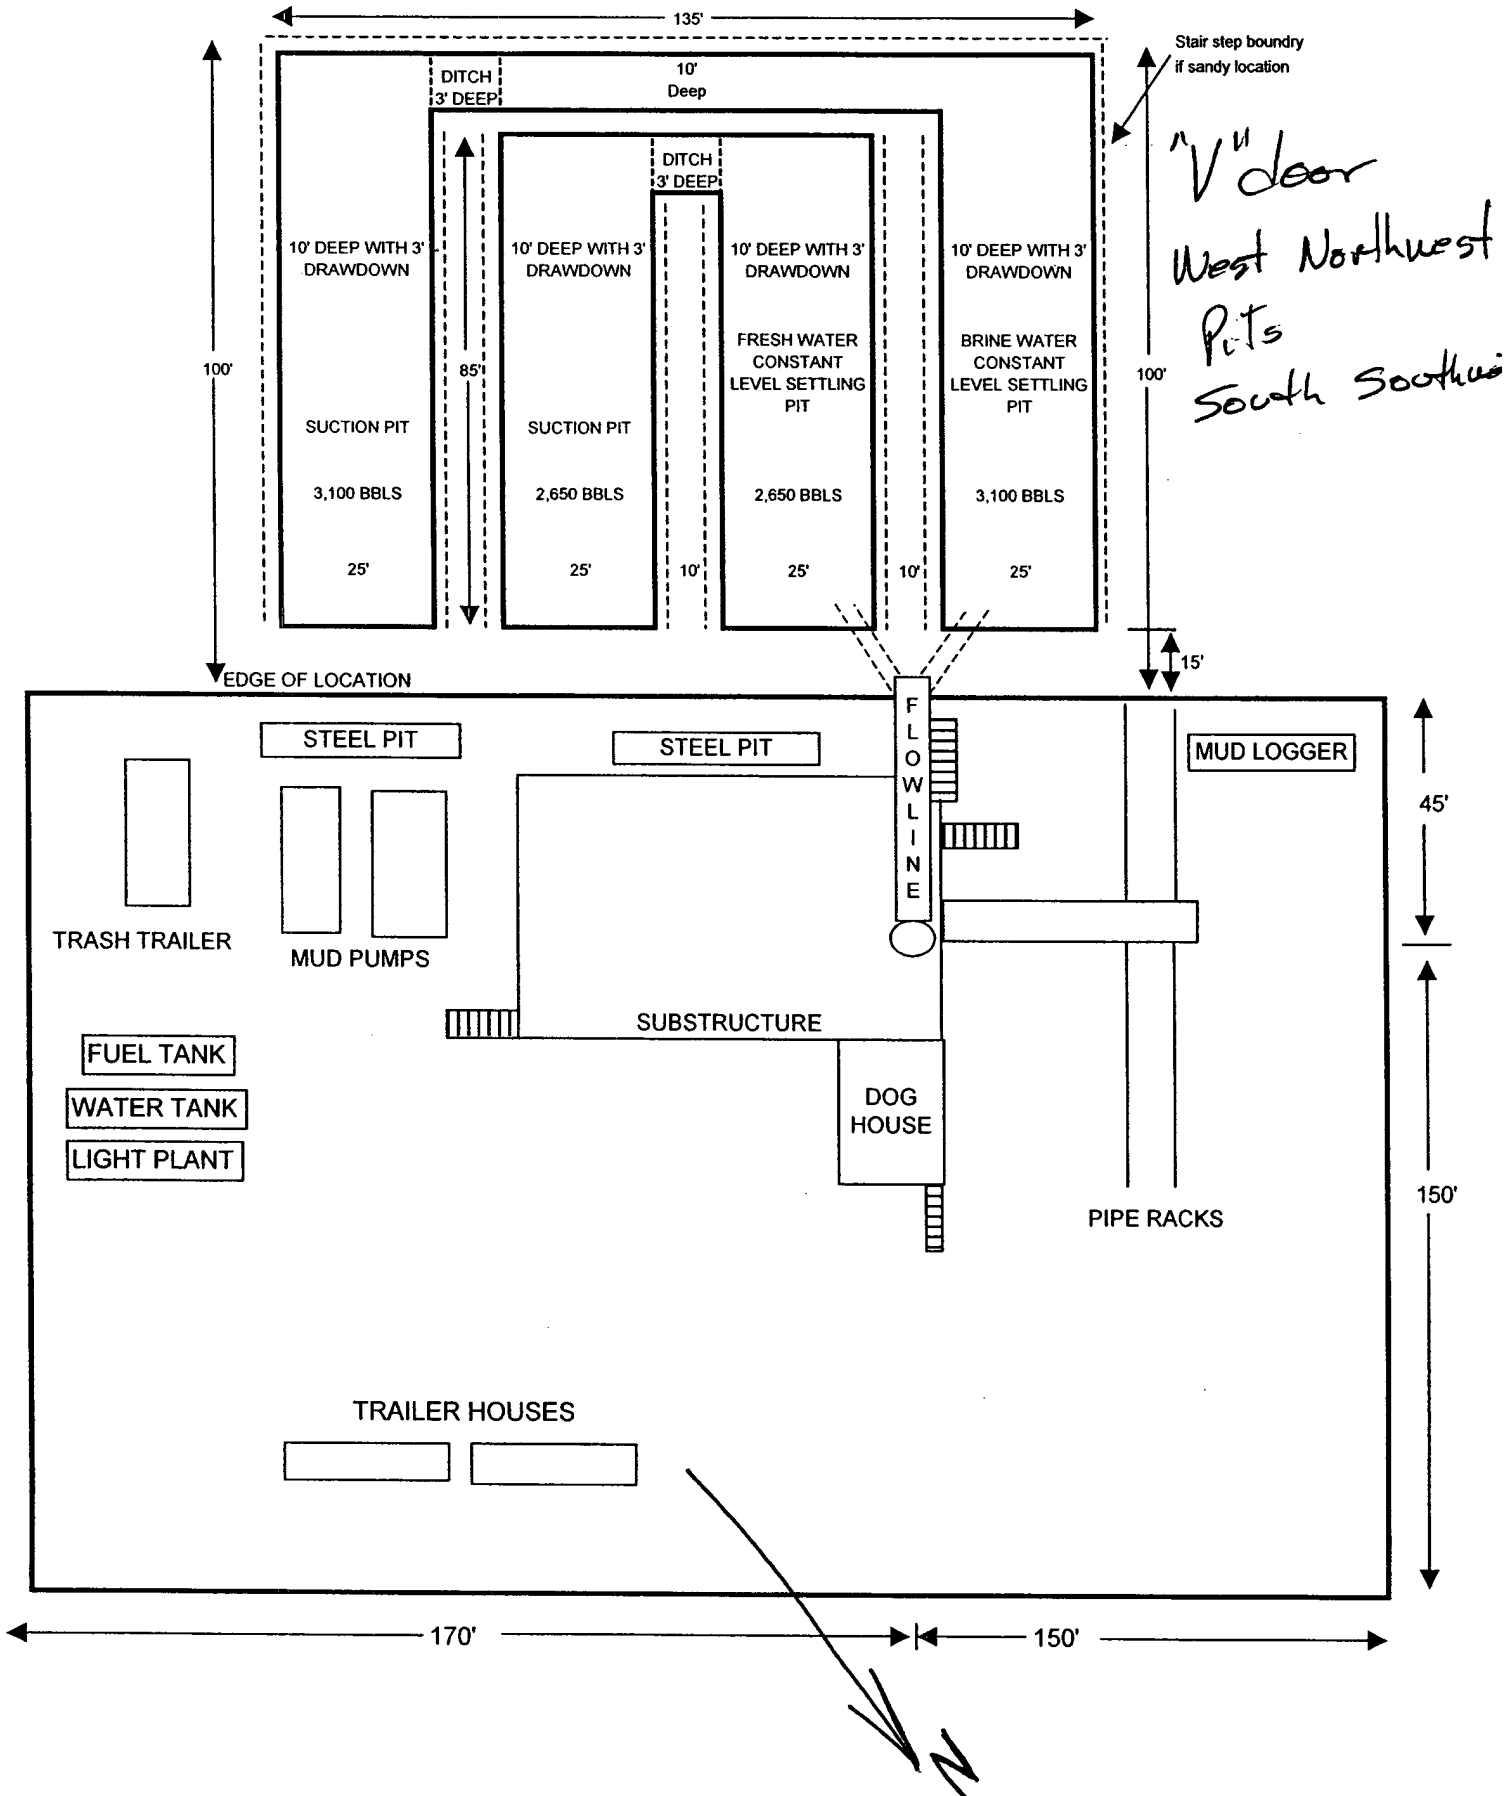


2000 PSI WP

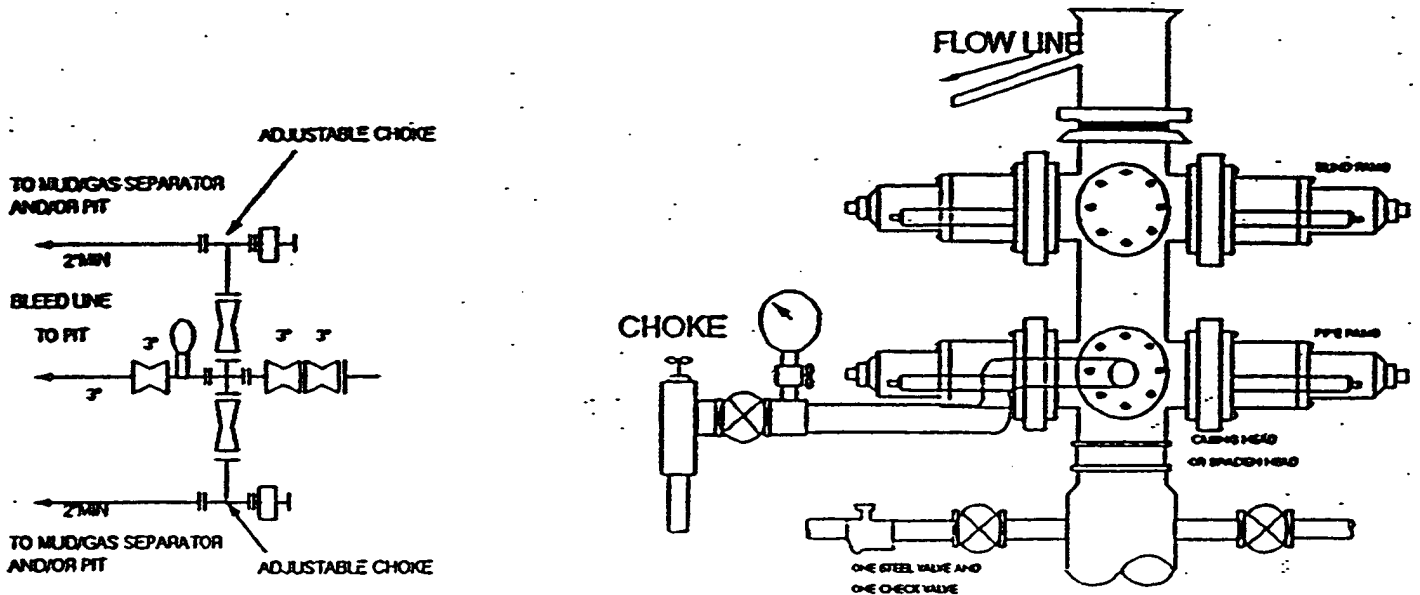

THE FOLLOWING CONSTITUTE MINIMUM BLOWOUT PREVENTER REQUIREMENTS

- A. One double gate blowout preventer with lower rams for pipe and upper rams blind, all hydraulically controlled.
- B. Opening on preventers between rams to be flanged, studded or clamped and at least two inches in diameter.
- C. All connections from operating manifold to preventers to be all steel hose or tube a minimum of one inch in diameter.
- D. The available closing pressure shall be at least 15% in excess of that required with sufficient volume to operate (close, open, and re-close) the preventers.
- E. All connections to and from preventers to have a pressure rating equivalent to that of the BOP's.
- F. Manual controls to be installed before drilling cement plug.
- G. Valve to control flow through drill pipe to be located on rig floor.
- H. All chokes will be adjustable. Choke spool may be used between rams.

3000 PSI WP

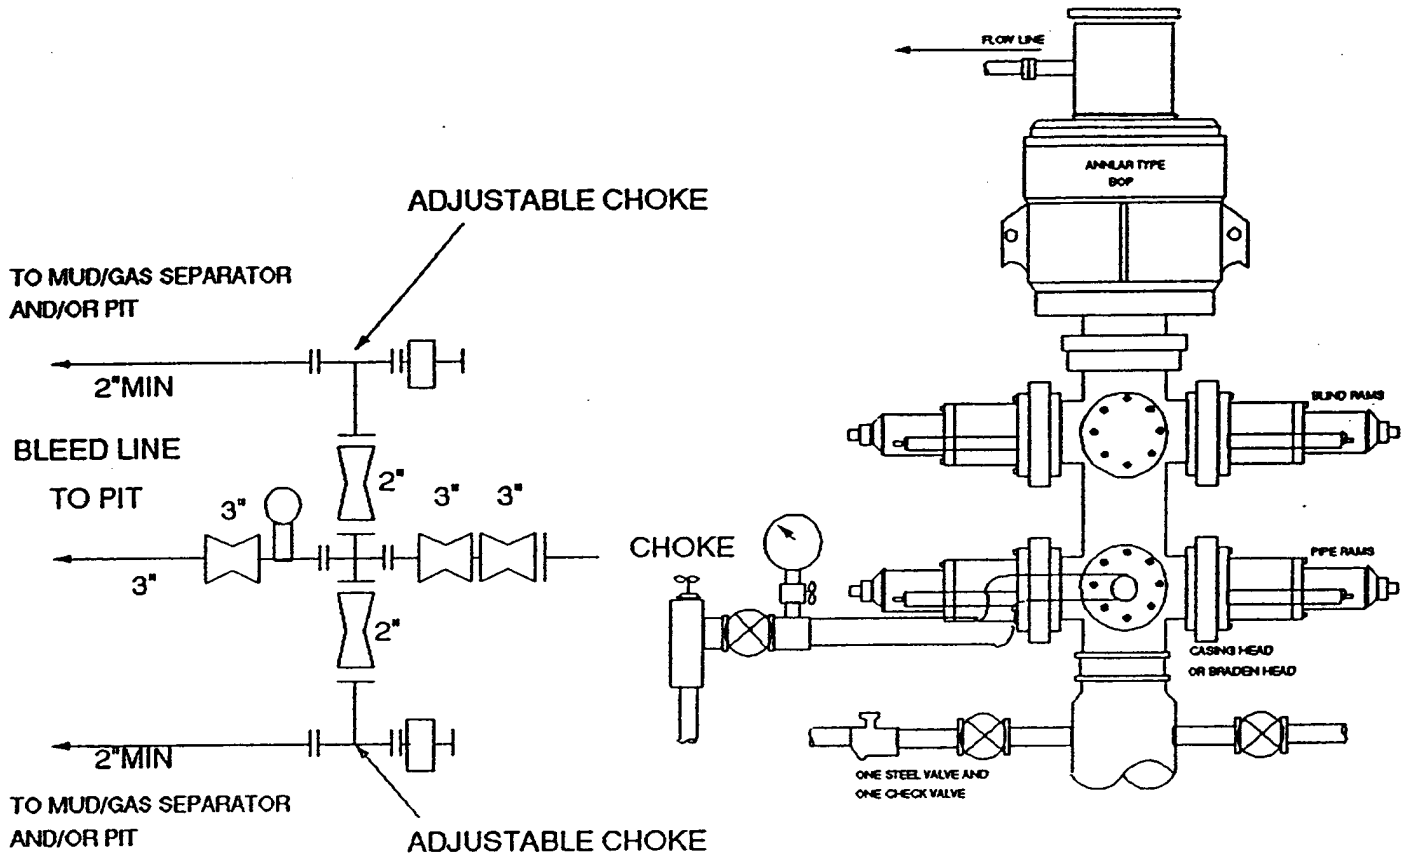

THE FOLLOWING CONSTITUTE MINIMUM BLOWOUT PREVENTER REQUIREMENTS

- One double gate blowout preventer with lower rams for pipe and upper rams blind, all hydraulically controlled.
- Opening on preventers between rams to be flanged, studded or clamped and at least two inches in diameter.
- All connections from operating manifold to preventers to be all steel hose or tube a minimum of one inch in diameter.
- The available closing pressure shall be at least 15% in excess of that required with sufficient volume to operate (close, open, and re-close) the preventers.
- All connections to and from preventers to have a pressure rating equivalent to that of the BOP's.
- Manual controls to be installed before drilling cement plug.
- Valve to control flow through drill pipe to be located on rig floor.
- All chokes will be adjustable. Choke spool may be used between rams.

CONDITIONS OF APPROVAL - DRILLING

Operator's Name: Bass Enterprises Production Company
Well Name & No. Poker Lake Unit #241
Location: 840' FSL, 2030' FEL, Section 30, T. 24 S., R. 30 E., Eddy County, New Mexico
Lease: LC-069627-A

I. DRILLING OPERATIONS REQUIREMENTS:

1. The Bureau of Land Management (BLM) is to be notified at the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (505) 361-2822 for wells in Eddy County in sufficient time for a representative to witness:

A. Well spud

B. Cementing casing: 11-3/4 inch 8-5/8 inch (if needed) 5-1/2 inch

C. BOP tests

2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.

3. Submit a Sundry Notice (Form 3160-5, one original and five copies) for each casing string, describing the casing and cementing operations. Include pertinent information such as; spud date, hole size, casing (size, weight, grade and thread type), cement (type, quantity and top), water zones and problems or hazards encountered. The Sundry shall be submitted within 15 days of completion of each casing string. The reports may be combined into the same Sundry if they fall within the same 15 day time frame.

4. The API No. assigned to the well by NMOCD shall be included on the subsequent report of setting the first casing string.

II. CASING:

1. The 11-3/4 inch surface casing shall be set at approximately 240 feet and cement circulated to the surface. If cement does not circulate to the surface the appropriate BLM office shall be notified and a temperature survey or cement bond log shall be run to verify the top of the cement. Remedial cementing shall be completed prior to drilling out that string.

2. The 8-5/8 inch intermediate casing (if needed) shall be set at approximately 3490 feet and cement circulated to the surface. If cement does not circulate to the surface the appropriate BLM office shall be notified and a temperature survey or cement bond log shall be run to verify the top of the cement. Remedial cementing shall be completed prior to drilling out that string.

3. The minimum required fill of cement behind the 5-1/2 inch production casing is to be sufficient to reach at least 500 feet above the top of the uppermost productive hydrocarbon bearing interval.

III. PRESSURE CONTROL:

1. All BOP systems and related equipment shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2. The BOP and related equipment shall be installed and operational before drilling below the 8-5/8 inch casing shoe and shall be tested as described in Onshore Order No. 2. Any equipment failing to test satisfactorily shall be repaired or replaced.

2. Minimum working pressure of the blowout preventer and related equipment (BOPE) shall be 2000 psi. Surface casing may be tested with the rig pumps.

3. The appropriate BLM office shall be notified in sufficient time for a representative to witness the tests.

- The results of the test shall be reported to the appropriate BLM office.
- Testing fluid must be water or an appropriate clear liquid suitable for sub-freezing temperatures. Use of drilling mud for testing is not permitted since it can mask small leaks.
- Testing must be done in a safe workman-like manner. Hard line connections shall be required.

11 3/4
JL