

## New Mexico Oil Conservation Division, District I

1625 N. French Drive

Hobbs, NM 88240

Form 3160-3  
(August 2007)UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTFORM APPROVED  
OMB No 1004-0137  
Expires: July 31, 2010

## SUNDRY NOTICES AND REPORTS ON WELLS

**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

SUBMIT IN TRIPLICATE -- Other instructions on page 2.

## 1. Type of Well

☐ Oil Well ☐ Gas Well ☒ Other

## 2. Name of Operator

Celero Energy II, LP

## 3a. Address

400 W Illinois, Ste 1601 Midland TX 79701

## 3b. Phone No (include area code)

(432)686-1883

## 4 Location of Well (Footage, Sec, T, R, M, or Survey Description)

1980' FSL & 1980' FEL  
Sec 34, T13S, R31E (J)

## 5. Lease Serial No.

NM-120355

## 6. If Indian, Allottee or Tribe Name

## 7. If Unit of CA/Agreement, Name and/or No.

## 8. Well Name and No.

Drickey Queen Sand Unit #903

## 9. API Well No.

30-005-00912

## 10. Field and Pool or Exploratory Area

Caprock; Queen

## 11. Country or Parish, State

Chaves, NM

## 12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

- 1 RIH w/ open tbg to 2781' & spot 40 sx. WOC 4 hrs & tag
2. Perf 4 @ 2150'. RIH w/ pkr & squeeze 40 sx. TOH. RIH w/ open tbg & tag after 4 hrs WOC.
3. Perf 4 @ 1420' RIH w/ pkr & squeeze 40 sx. TOH. RIH w/ open tbg & tag after 4 hrs WOC.
4. Perf 4 @ 250'. RIH w/ open tbg & circ 5 1/2" csg & 5 1/2" x 13 3/8" annulus full of cmt.
- 5 POOH w/ tbg & top off csg w/ cmt.
6. Cut of WH. Set P&A marker & reclaim location.

- 10 ppg salt mud between all plugs.
- All plugs are Class C cmt w/2% CaCl2.

**APPROVED FOR 3 MONTH PERIOD**  
**ENDING OCT 12 2011**

*MWB-OCD 7/20/2011*

14 I hereby certify that the foregoing is true and correct Name (Printed/Typed)

Lisa Hunt

Title Regulatory Analyst

Signature

*Lisa Hunt*

Date 06/24/2011

## THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

/S/ DAVID R. GLASS

PETROLEUM ENGINEER

Date JUL 12 2011

Conditions of approval, if any, are attached Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title  
Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations or to furnish any information within its jurisdiction.

(Instructions on page 2)

**SEE ATTACHED FOR**  
**CONDITIONS OF APPROVAL**

# CELERO ENERGY

FIELD: Caprock  
LEASE/UNIT: Federal "V" Lease DQSU  
COUNTY: Chaves

DATE: Jun. 23, 2011  
BY: MWM  
WELL: -3 903  
STATE: New Mexico

Location: 1980' FSL & 1980' FEL, Sec 34J, T13S, R31ECM

SPUD: 9/55 COMP: 9/55


CURRENT STATUS: Injector

Original Well Name: Federal "V" #3

KB = 4428'

GL = 4420'

API = 30-005-00912

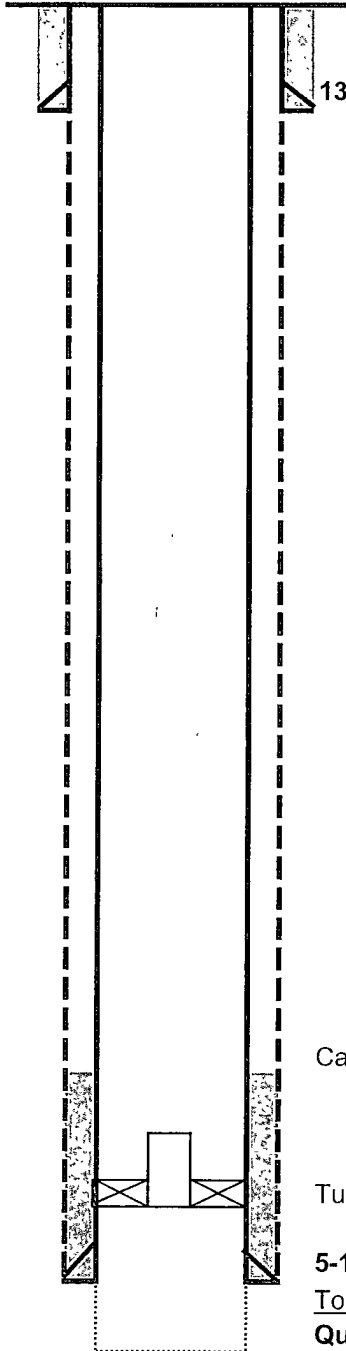

13-3/8", 44# @ 200' w/225 sx-calc'd TOC at surface

T-Anhy @ 1420'

T-Salt @ 1510'

B-Salt @ 2150'

T-Yates @ 2285' est.

T-Queen @ 3040'

EXISTING

Calc'd TOC at 2591' w/enlargement = 15%, yield = 1.26 ft3/sk

Tubing/Packer(?) at or below top of fish at 2881'.

5-1/2", 14# @ 3038' w/100 sx

Top of Queen @ 3040':

Queen Open Hole: 3040' - 3061' (9-55)

PBTD -  
TD - 3061'

# CELERO ENERGY

FIELD: Caprock  
LEASE/UNIT: ~~Federal "V" Lease~~ DQSU  
COUNTY: Chaves

DATE: Jun. 23, 2011  
BY: MWM  
WELL: ~~3~~ 903  
STATE: New Mexico

Location: 1980' FSL & 1980' FEL, Sec 34J, T13S, R31ECM

SPUD: 9/55 COMP: 9/55


CURRENT STATUS: Injector

Original Well Name: Federal "V" #3

KB = 4428'

GL = 4420'

API = 30-005-00912

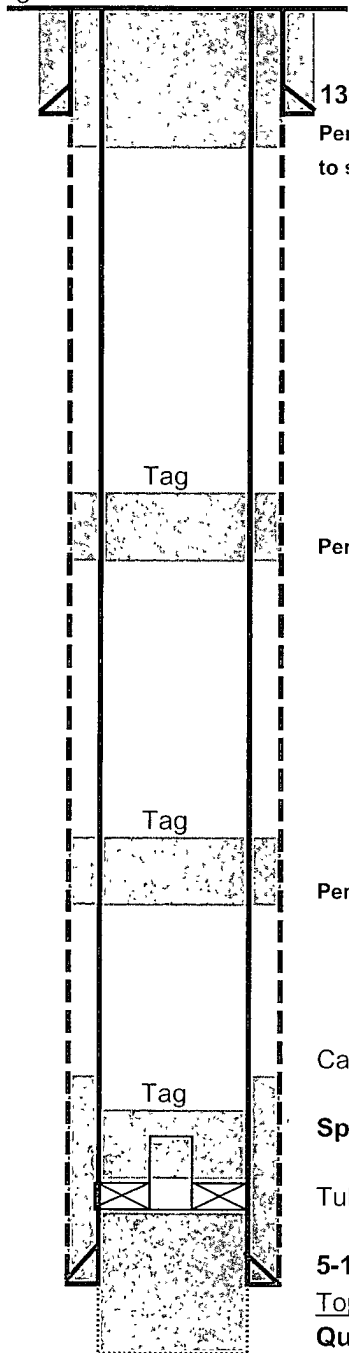

13-3/8", 44# @ 200' w/225 sx-calc'd TOC at surface

Perf(4) at 250', fill 5-1/2" and 5-1/2"-by-13-3/8' annulus to surface

## PROPOSED P&A

T-Anhy @ 1420'

T-Salt @ 1510'

B-Salt @ 2150'

T-Yates @ 2285' est.

T-Queen @ 3040'

Perf (4) at 1420', squeeze 40 sx, tag at or above 1320'

Perf(4) at 2150', squeeze 40 sx, tag at or above 2050'

Calc'd TOC at 2591' w/enlargement = 15%, yield = 1.26 ft3/sk

Spot 40 sx, tag at or above 2781'

Tubing/Packer(?) at or below top of fish at 2881'.

5-1/2", 14# @ 3038' w/100 sx

Top of Queen @ 3040':

Queen Open Hole: 3040' - 3061' (9-55)

PBTD -  
TD - 3061'

## **BUREAU OF LAND MANAGEMENT**

**Roswell Field Office  
2909 West Second Street  
Roswell, New Mexico 88201  
(575) 627-0272**

### **Permanent Abandonment of Federal Wells Conditions of Approval**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. **Plugging operations** shall commence within **ninety (90) days** from the approval date of this Notice of Intent to Abandon. **If you are unable to plug the well by the 90<sup>th</sup> day provide the BLM Roswell Field Office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when the BLM Roswell Field Office can expect the well to be plugged. Failure to do so will result in enforcement action.**

2. **Notification:** Contact the BLM Roswell Field Office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, during office hours call (575) 627-0205 or after office hours call (575) 420-2832. Engineer on call during office hours phone (575) 627-0275 or phone (after hours) call (575) 626-5749.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The minimum BOP requirement is a 2M system for a well not deeper than 9090 feet; a 3M system for a well not deeper than 13636 feet; and a 5M system for a well not deeper than 22727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at a rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. In lieu of a cement plug in cased hole, a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 50 feet of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either class "C" for up to 7500 feet of depth, mixed at 14.8 lbs./gal with 6.3 gallons of fresh water per sack or class "H" for deeper than 7500 feet plugs, mixed at 16.4 lbs./gal with 4.3 gallons of fresh water per sack.

6. **Dry Hole Marker:** All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be capped with a 4-inch pipe, 10 feet in length, 4 feet above the ground and embedded in cement. The following information shall be permanently inscribed on the dry hole marker: Well name and number, the name of the operator, the lease serial number, the surveyed location (the quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer; such as metes and bounds).

7. **Subsequent Plugging Reporting:** Within 30 days after plugging work is completed, file one original and five copies of the Subsequent Report of Abandonment, Form 3160-5 to the BLM Roswell Field Office. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

Following the submittal and approval of the Subsequent Report of Abandonment, a Notice of Intent for Final Abandonment with the proposed surface restoration procedure must be submitted for approval.