

Submit 3 Copies To Appropriate District
Office
District I
1625 N French Dr., Hobbs, NM 87240
District II
1301 W Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103

June 19, 2008

HOBBS OCD

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

JUL 15 2011

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other ☒

2. Name of Operator

Nearburg Producing Company

3. Address of Operator

3300 N. A Street, Bldg 2, #120; Midland, Tx 79705

4. Well Location

Unit Letter B : 280 feet from the N line and 2450 feet from the E line

Section 13 Township 17S Range 37E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc)
3724

WELL API NO.

3002540083

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name:

Honey 13

8. Well Number

1

9. OGRID Number

15742

10. Pool name or Wildcat

Humble City; Strawn South

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☒
CASING/CEMENT JOB ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

3/23/11 Spud well @ 0230.

3/24/11 Drill & TD 17-1/2" hole @ 480'. RIH w/ 13-3/8", 48#, H-40, ST&C csg & set @ 480'. Pump 510 sx Class C 2% Cacl, .125% Celloflake. Did not circ. RIH w/ 1" & TIH, tag cmt @ 70'. Pump 57 sx Class C NEAT & circ 2 sx cmt to surface. WOC.

4/10/11 Drill & TD 12-1/4" hole @ 4620'. RIH w/ 8-5/8", 32#, N-80, LT&C csg & set @ 4558'. Pump 1300 sx 50/50 POZ C, 10%Gel, 1.0125% celloflakes, 5% salt, .3% FL-52, 5% LCM-1 @ 11.8 ppg, 2.45 yield. Pump 370 sx Class C NEAT, 14.8 ppg, 1.33 yield, 633 gal/sx. Bump plug. Circ 151 sx. WOC.

--Cont on next page--

Spud Date:

03/23/11

Rig Release Date:

5/18/11

Approved for plugging of well bore only.
Liability under bond is retained pending receipt
of C-103 (Subsequent Report of Well Plugging)
which may be found at OCD Web Page under
Forms, www.dmnrd.state.nm.us/oed.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE Regulatory/Production Analyst DATE 5/19/11

tstathem@nearburg.com

Type or print name Terri Stathem

E-mail address: PHONE 4328182950

For State Use Only

APPROVED BY

TITLE PETROLEUM ENGINEER

DATE

JUL 27 2011

Conditions of Approval (if any):

Nearburg Producing Company

Honey 13 #1 - C103 - Dry hole.

4/14/2011 Drilling 7-7/8" hole.

5/10/2011 TD 7-7/8" hole @ 11966'.

5/17/2011 TOO H W/ DRILL PIPE. VERBAL APPROVAL FROM BUDDY HILL TO PLUG & ABANDONED WELL. TIH W/ 4-1/2" DP. RU CEMENTERS, TEST LINES TO 3000#, SPOT PLUG #1 50 SXS CLASS "H" F/11,210 FT- T/ 11,110, L/D 61 JTS DP SPOT PLUG #2 50 SXS CLASS "H" F/9124' - T/9024', L/D 64 JTS, SPOT PLUG #3 50 SXS CLASS "H" F/7104' - T/7004', L/D 67 JTS DP, SPOT PLUG #4 50 SXS CLASS "H" F/5004' - 4904', L/D 12 JTS DP SPOT PLUG #5 40 SXS CLASS "C" F/4608' - T/4508', L/D 32 JTS, SPOT PLUG #6 30 SXS CLASS "C" F/3600' - T/3500', L/D 41 JTS DP, SPOTTING PLUG #7 AT REPORT TIME


5/18/2011 SPOT PLUG #7 30 SXS CLASS "C" F/2350' - T/2250', L/D 59 JTS , SPOT PLUG #8 30 SXS CLASS "C" F/530' - T/430', L/D ALL DRILL PIPE.

N/D BOP STACK AND B SECTION.

TRIP IN HOLE W/ 3 JTS DP AND SPOT PLUG 17 SXS CLASS 'C' F/60'-T/SURF - CIRC CEMENT TO SURFACE.

LD DP. CLEAN AND JETS RELEASE RIG @1600 HRS 05/18/11. WELL DRILLED & ABANDONED.

P & A OF HONEY 13 #1

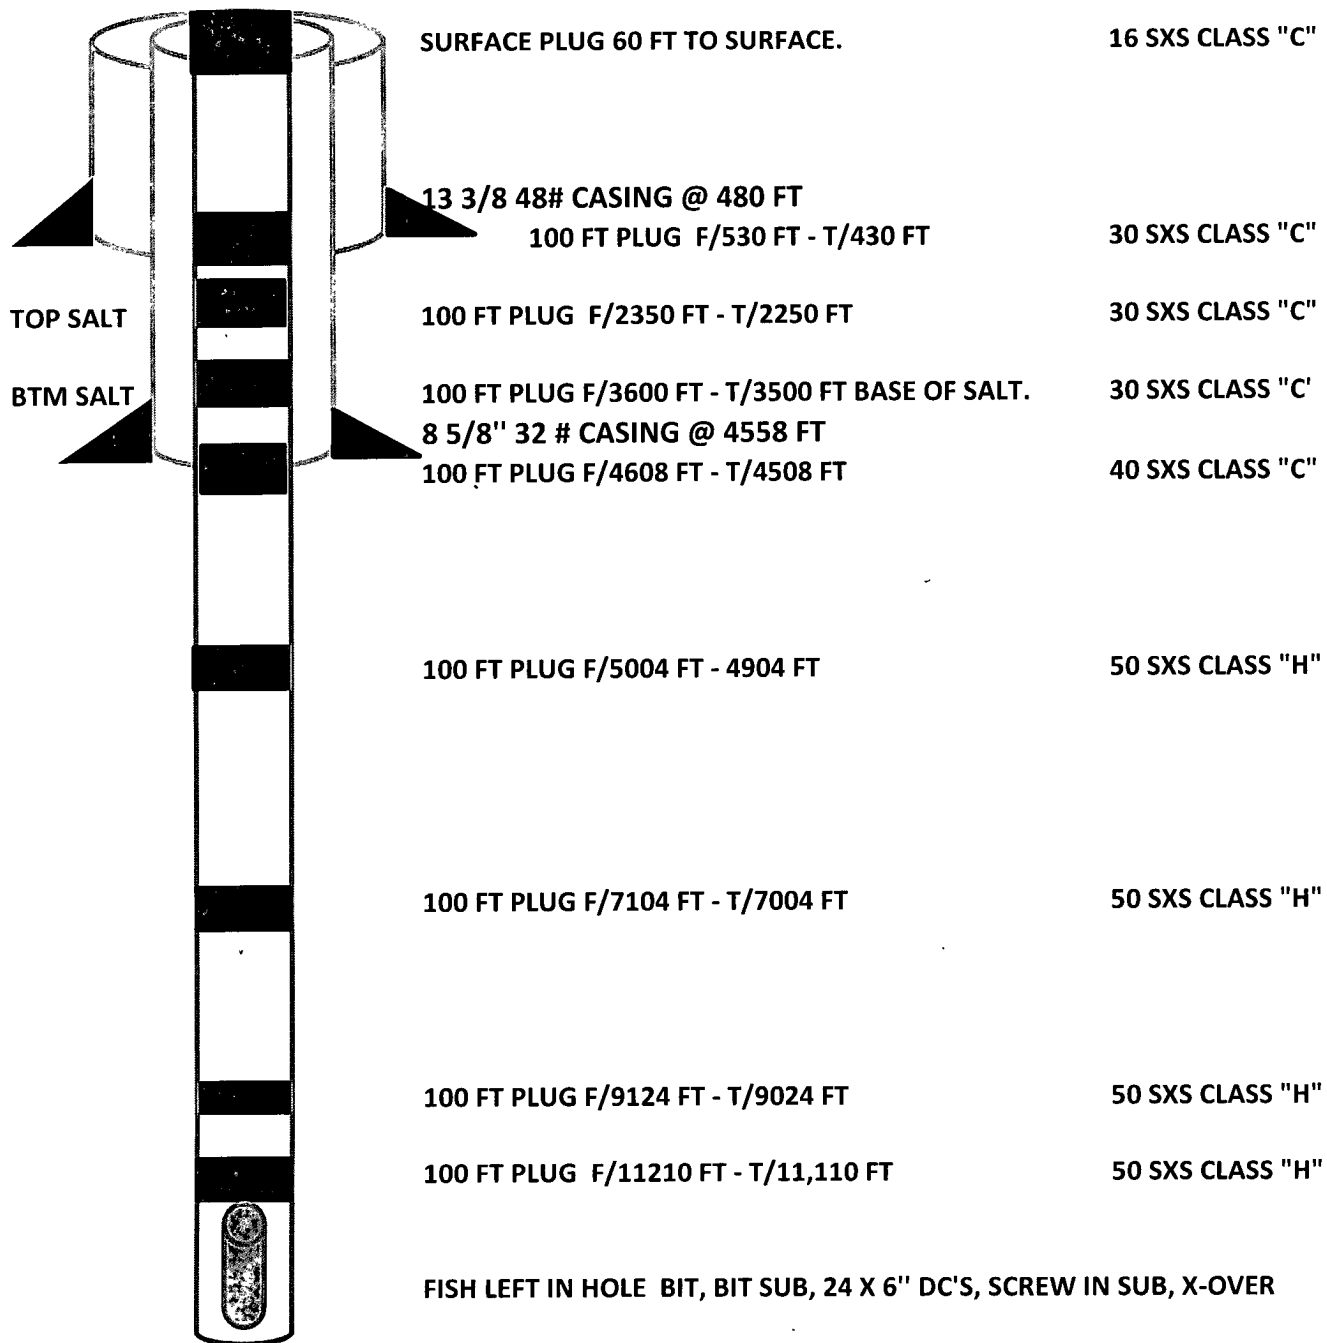

TOTAL DEPTH @ 11,966 FT / 7 7/8" HOLE

146 SXS CLASS "C" 14.8 PPG 1,32 YIELD , 6.3 GAL/SX

200 SXS CLASS "H" 15.6 PPG 1.18 YIELD, 5.2 GAL/SX