

ATS-10-644

HOBBS OCD

OCD-HOBBS

Form 3160-3  
(April 2004)

AUG 10 2011

RECEIVED

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
**APPLICATION FOR PERMIT TO DRILL OR REENTER**


FORM APPROVED  
OMB No 1004-0137  
Expires March 31, 2007

1a. Type of work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5 Lease Serial No. <b>NMLC-029509A</b>
1b. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name N/A
2. Name of Operator <b>COG Operating LLC</b>		7 If Unit or CA Agreement, Name and No N/A
3a Address <b>550 W. Texas, Suite 1300 Midland TX 79701</b>		8 Lease Name and Well No. <b>302519</b> <b>M C FEDERAL #62</b>
3b. Phone No. (include area code) <b>(432) 685-4384</b>		9 API Well No. <b>30-025- 40240</b>
4. Location of Well (Report location clearly and in accordance with any State requirements *) At surface <b>2012' FSL &amp; 553' FWL, Unit L</b> At proposed prod. zone		10 Field and Pool, or Exploratory <b>Maljamar; Yeso, West 44500</b>
14 Distance in miles and direction from nearest town or post office* <b>2.5 miles south of Maljamar NM</b>		11 Sec, T R M. or Blk and Survey or Area <b>Sec 21, T17S, R32E</b>
15 Distance from proposed* location to nearest property or lease line, ft (Also to nearest drig. unit line, if any) <b>553'</b>	16 No. of acres in lease <b>640</b>	17 Spacing Unit dedicated to this well <b>40</b>
18 Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft <b>330'</b>	19 Proposed Depth <b>7100'</b>	20 BLM/BIA Bond No. on file <b>NMB000740</b>
21. Elevations (Show whether DF, KDB, RT, GL, etc) <b>4020' GL</b>	22 Approximate date work will start* <b>06/30/2011</b>	23 Estimated duration <b>15 days</b>

## 24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No 1, shall be attached to this form:

- |   |  |
|---|--|
| 1 Well plat certified by a registered surveyor.   | 4 Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).   |
| 2 A Drilling Plan.  | 5 Operator certification   |
| 3 A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office) | 6 Such other site specific information and/or plans as may be required by the authorized officer |

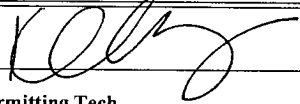25 Signature 	Name (Printed/Typed) <b>Kelly J. Holly</b>	Date <b>05/02/2011</b>
Title <b>Permitting Tech</b>		

Approved by (Signature) <b>/s/ Don Peterson</b>	Name (Printed/Typed)	Date <b>AUG 8 2011</b>
Title <b>FIELD MANAGER</b>		Office <b>CARLSBAD FIELD OFFICE</b>

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached

**APPROVAL FOR TWO YEARS**

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

\*(Instructions on page 2)

Roswell Controlled Water Basin

**K200/18/11**

Approval Subject to General Requirements  
& Special Stipulations Attached

SEE ATTACHED FOR  
CONDITIONS OF APPROVAL

DISTRICT I  
1625 N. FRENCH DR., HOBBS, NM 88240

DISTRICT II  
1301 W. GRAND AVENUE, ARTESIA, NM 88210

DISTRICT III  
1000 RIO BRAZOS RD., AZTEC, NM 87410

DISTRICT IV  
11885 S. ST. FRANCIS DR., SANTA FE, NM 87505

# State of New Mexico

Energy, Minerals & Natural Resources Department

## OIL CONSERVATION DIVISION

1220 South St. Francis Dr.  
Santa Fe, New Mexico 87505

Form C-102

Revised July 16, 2010

Submit to Appropriate  
District Office

☐ AMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025 <b>40240</b>	Pool Code 44500	Pool Name Maljamar; Yeso-West
Property Code 302519	Property Name MC FEDERAL	Well Number 62
OGRID No. 229137	Operator Name COG OPERATING, LLC	Elevation 4020'


#### Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	21	17-S	32-E		2012	SOUTH	553	WEST	LEA

#### Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

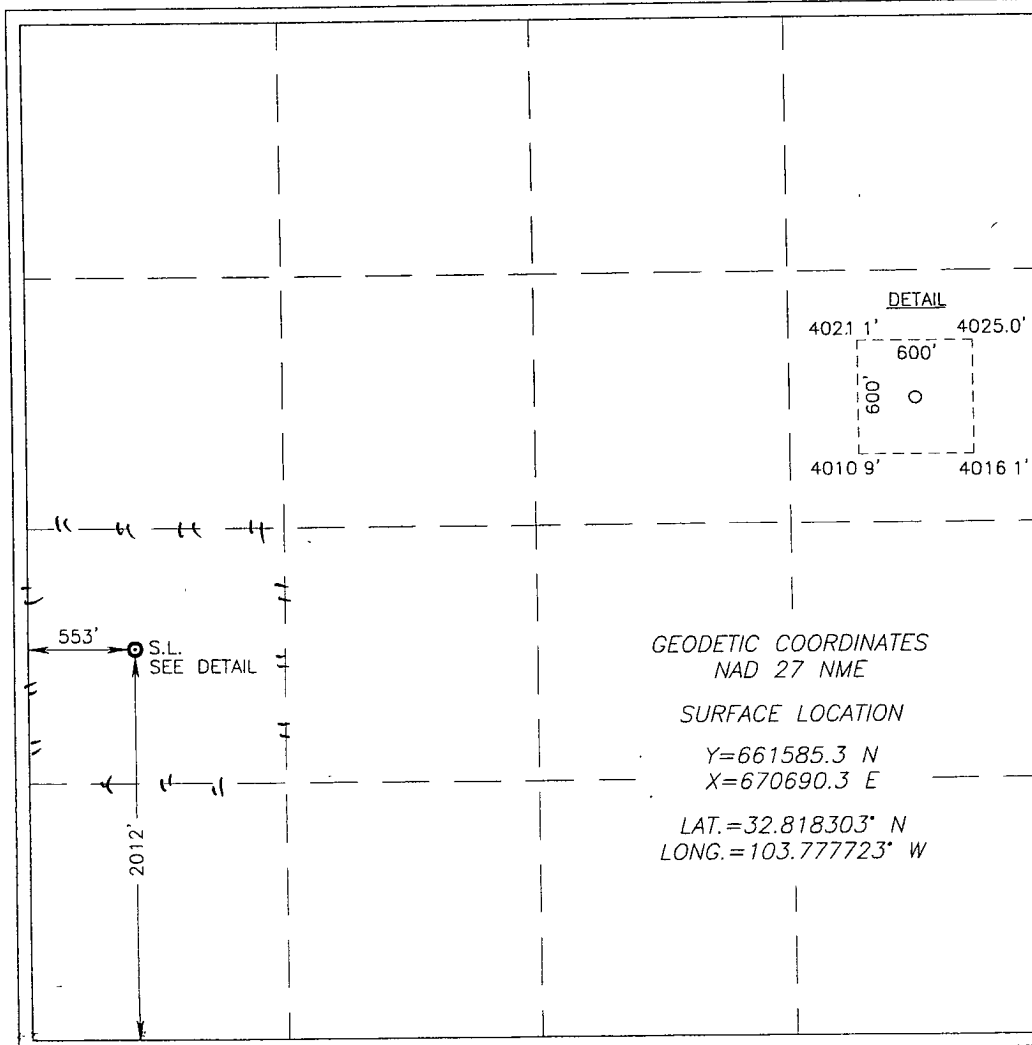

#### OPERATOR CERTIFICATION

I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature Date 5-5-11

Kelly J. Holly  
Printed Name

kholly@conchoresources.com  
E-mail Address

#### SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

APRIL 19, 2011

Date of Survey  
Signature & Seal of Professional Surveyor:

Certificate Number 12641  
Gary G. Eidson  
Professional Surveyor Ronald J. Eidson 3239  
DSS JWSC W.O.: 11.11.0187

HOBBS OCD

AUG 10 2011

RECEIVED

## MASTER DRILLING PROGRAM

### 1. Geologic Name of Surface Formation

Quaternary

### 2. Estimated Tops of Important Geologic Markers:

Quaternary	Surface
Rustler	680'
Top of Salt	900'
Base of Salt	1700'
Yates	2010'
Seven Rivers	2375'
Queen	2980'
Grayburg	3355'
San Andres	3700'
Glorietta	5260'
Paddock	5310'
Blaine	5870'
Tubb	6810'

### 3. Estimated Depths of Anticipated Fresh Water, Oil and Gas

Water Sand	150'	Fresh Water
Grayburg	3355'	Oil/Gas
San Andres	3700'	Oil/Gas
Glorietta	5260'	Oil/Gas
Paddock	5310'	Oil/Gas
Blaine	5870'	Oil/Gas
Tubb	6810'	Oil/Gas

No other formations are expected to give up oil, gas or fresh water in measurable quantities. Setting 13 3/8" casing to 720' and circulating cement back to the surface will protect the surface fresh water sand. The Salt Section will be protected by setting 8 5/8" casing to 2100' and circulating cement, in a single or multi-stage job and/or with an ECP, back to the surface. Any shallower zones above TD, which contain commercial quantities of oil and/or gas, will have cement circulated across them. This will be achieved by cementing, with a single or multi-stage job, the 5 1/2" production casing back 200' into the intermediate casing, to be run at TD. If wellbore conditions arise that require immediate action and/or a change to this program, COG Operating LLC personnel will always react to protect the wellbore and/or the environment.

See  
COA

See COA

See  
COA

4. Casing Program

*see COA*

Hole Size	Interval	OD Casing	Weight	Grade	Jt., Condition	burst/collapse/tension
17 1/2"	0-720' <del>860'</del>	13 3/8"	48#	H-40orJ-55	ST&C/New	6.03/2.578/10.32
11"	0-2100' ✓	8 5/8"	24or32#	J-55	ST&C/New	1.85/1.241/4.78
7 7/8"	0-T.D. <del>7100'</del>	5 1/2"	15.5or17#	J-55orL-80	LT&C/New	1.59/1.463/2.05

5. Cement Program

13 3/8" Surface Casing:

LEAD Class C, 4% Gel, 2% CaCl<sub>2</sub>, .25 pps CF, 325 sx, yield-1.75 + TAIL 200 sx w/ 2% CaCl<sub>2</sub>, 0.25 pps CF, yield-1.32. 133% excess

8 5/8" Intermediate Casing:

**11" Hole:**

**Single Stage:** LEAD 50:50:10 C:Poz:Gel w/ 5% Salt +0.25% CF, 375 sx, yield-2.45 + TAIL Class C w/2% CaCl<sub>2</sub>, 200 sx, yield-1.32, back to surface. 133% excess

**Multi-Stage:** Stage 1: Class C w/2% CaCl<sub>2</sub>, 400 sx, yield - 1.32; 48% excess  
Stage 2: Class C w/2% CaCl<sub>2</sub>, 200 sx, yield - 1.32, back to surface, 48% excess; assumption for tool is lost circulation. Multi stage tool to be set at approximately, depending on hole conditions, ~~270'~~ (50' below the surface casing). Cement volumes will be adjusted proportionately for depth changes of multi stage tool.

*\* See COA*

5 1/2" Production Casing:

**Single Stage:** LEAD 35:65:6 C:Poz:Gel w/ 5% Salt + 5 pps LCM + 0.2% SMS + 0.3% FL-52A + 0.125 pps CF, 500 sx, yield-2.05 + TAIL 50:50:2 C:Poz:Gel w/ 5% Salt + 3 pps LCM + 0.6% SMS + 1% FL-25 + 1% BA-58 + 0.3% FL-52A + 0.125 pps CF, 400 sx, yield-1.37, to 200' minimum tie back to intermediate casing. 30% excess back to surface.

**Multi-Stage:** Stage 1: (Assumed TD of 7000') 50:50:2, C:Poz:Gel w/ 5% Salt + 3

pps LCM + 0.6% SMS + 1% FL-25 + 1% BA-58 + 0.3% FL-52A + 0.125 pps CF, 500 sx, yield - 1.37, 13% excess; minimum volume, will be adjusted up after caliper is run. Stage 2: LEAD 50:50:2 C:Poz:Gel w/ 5% Salt + 3 pps LCM + 0.6% SMS + 1% FL-25 + 1% BA-58 + 0.3% FL-52A + 0.125 pps CF, 450 sx, yield - 1.37, + TAIL Class C w/ 0.3% R-3 + 1.5% CD-32, 250 sx, yield - 1.02 43% excess calculated back to surface. Multi stage tool to be set at approximately, depending on hole conditions, 3500'. Cement volumes will be adjusted proportionately for depth changes of multi stage tool, assumption for tool is water flow.

See  
COA

#### 6. Minimum Specifications for Pressure Control

The blowout preventer equipment (BOP) shown in Exhibit #9 will consist of a double ram-type (2000 psi WP) preventer, and in some cases possibly a 2000 psi Hydril type annular preventer as provided for in Onshore Order #2. This unit will be hydraulically operated and the ram type preventer will be equipped with blind rams on top of 4 1/2" drill pipe rams on the bottom. A 13-5/8" or 11" BOP will be used, depending on the rig selected, during the drilling of the well. The BOP will be nipped up on the 13 3/8" surface casing with BOP equipment and tested to 2000 psi. When 11" BOP is used the special drilling flange will be utilized on the 13-3/8" head to allow testing the BOP with a retrievable test plug. After setting 8-5/8" the BOP will then be nipped up on the 8 5/8" intermediate casing and tested by a third party to 2000 psi and used continuously until total depth is reached. Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment (Exhibit #10) will include a Kelly cock and floor safety valve, choke lines and a choke manifold (Exhibit #11) with a 2000 psi WP rating.

\*  
See  
COA

The majority of the rigs currently in use have a 13-5/8" BOP, so no special provision is needed for most wells in the area for conventionally testing the BOP with a test plug. However, due to the vagaries of rig scheduling, it might be that one of the few rigs with 11" BOP's might be called upon to drill any specific well in the area. Note that intermediate hole size is always 11". Therefore, COG Operating LLC respectfully requests a variance to the requirement of 13-5/8" BOP on 13-3/8" casing. When that circumstance is encountered the special flange will be utilized to allow testing the entire BOP with a test plug, without

subjecting the casing to test pressure. The special flange also allows the return to full-open capability if desired.

## 7. Types and Characteristics of the Proposed Mud System

The well will be drilled to TD with a combination of brine, cut brine and polymer mud system. The applicable depths and properties of this system are as follows:

*\* See COA*

DEPTH	TYPE	WEIGHT	VISCOSITY	WATERLOSS
0- <del>720'</del> 860'	Fresh Water	8.5	28	N.C.
<del>720-</del> 2100'	Brine	10	30	N.C.
2100'-TD	Cut Brine	8.7-9.1	29	N.C.

Sufficient mud materials will be kept at the well site to maintain mud properties and meet minimum lost circulation and weight increase requirements at all times.

## 8. Auxiliary Well Control and Monitoring Equipment

- \* See COA*
- A. Kelly cock will be kept in the drill string at all times.
  - B. A full opening drill pipe-stabbing valve with proper drill pipe connections will be on the rig floor at all times.

## 9. Logging, Testing and Coring Program

- See COA*
- A. The electric logging program will consist of GR-Dual Laterolog, Spectral Density, Dual Spaced Neutron, CSNG Log and will be run from TD to 8 5/8" casing shoe.
  - B. Drill Stem test is not anticipated.
  - C. No conventional coring is anticipated.
  - D. Further testing procedures will be determined after the 5 1/2" production casing has been cemented at TD, based on drill shows and log evaluation.

## 10. Abnormal Conditions, Pressure, Temperatures and Potential Hazards

No abnormal pressures or temperatures are anticipated. The estimated bottom hole at TD is 110 degrees and the estimated maximum bottom hold pressure is 2300 psig. Measurable gas volumes or Hydrogen Sulfide levels have not been encountered during drilling operations in this area, although a Hydrogen Sulfide

Drilling Operation Plan is attached to this program. No major loss of circulation zones has been reported in offsetting wells.


**11. Anticipated Starting Date and Duration of Operations**

Road and location work will not begin until approval has been received from the BLM. As this is a Master Drilling plan, please refer to the Form 3160-3 for the anticipated start date. Once commenced, drilling operations should be finished in approximately 15 days. If the well is productive, an additional 30 days will be required for completion and testing before a decision is made to install permanent facilities.


# COG Operating LLC

## Exhibit #9

### BOPE and Choke Schematic

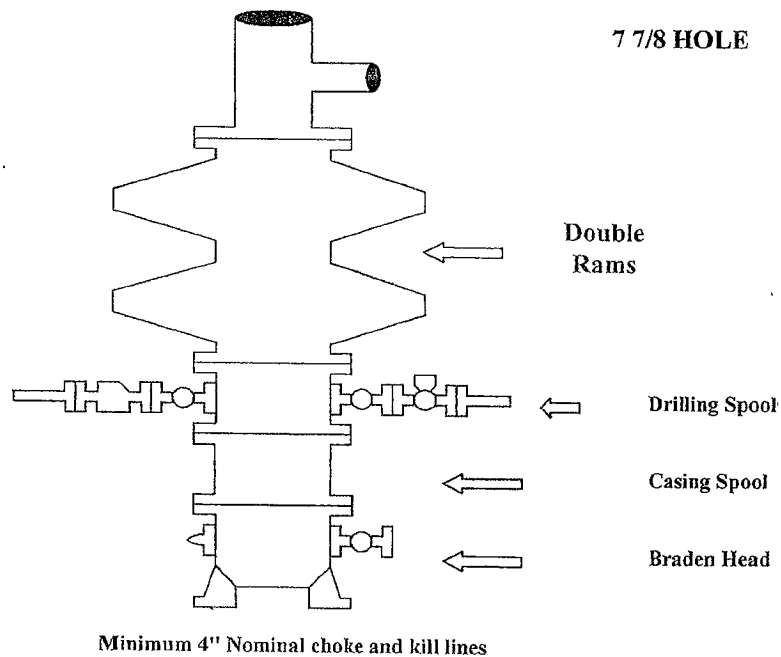

Choke Manifold Requirement (2000 psi WP)  
No Annular Required

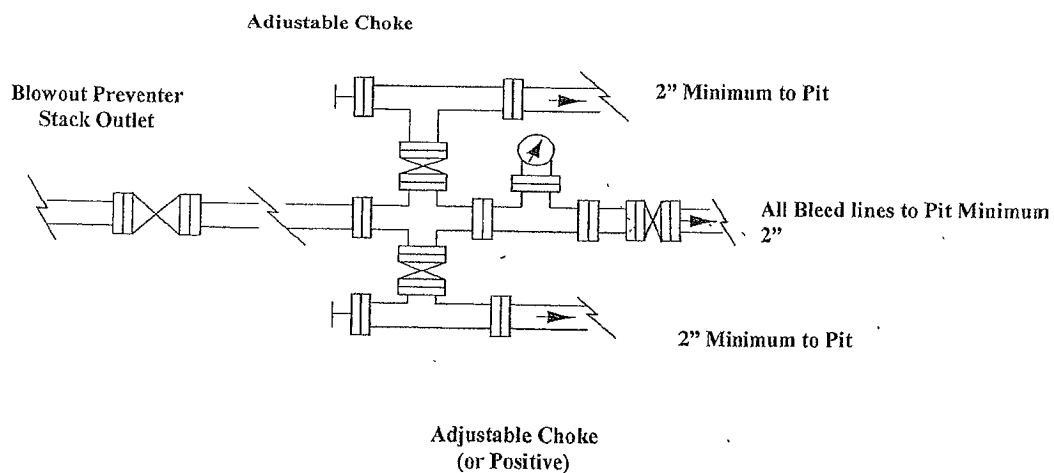



**NOTES REGARDING THE BLOWOUT PREVENTERS**  
**Master Drilling Plan**  
**Eddy County, New Mexico**

1. Drilling nipple to be so constructed that it can be removed without use of a welder through rotary table opening, with minimum I.D. equal to preventer bore.
2. Wear ring to be properly installed in head.
3. Blow out preventer and all fittings must be in good condition, 2000 psi WP minimum.
4. All fittings to be flanged.
5. Safety valve must be available on rig floor at all times with proper connections, valve to be full 2000 psi WP minimum.
6. All choke and fill lines to be securely anchored especially ends of choke lines.
7. Equipment through which bit must pass shall be at least as large as the diameter of the casing being drilled through.
8. Kelly cock on Kelly.
9. Extension wrenches and hands wheels to be properly installed.
10. Blow out preventer control to be located as close to driller's position as feasible.
11. Blow out preventer closing equipment to include minimum 40-gallon accumulator, two independent sources of pump power on each closing unit installation all API specifications.