

OCD - HOBBS
08/25/2020
RECEIVED

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No.
1b. Type of Well: <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator [215099]		8. Lease Name and Well No. [322999]
3a. Address	3b. Phone No. (include area code)	9. API Well No. 30-025-47646
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		10. Field and Pool, or Exploratory [98309]
14. Distance in miles and direction from nearest town or post office*		11. Sec., T. R. M. or Blk. and Survey or Area
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)		12. County or Parish
16. No of acres in lease		13. State
17. Spacing Unit dedicated to this well		
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.		20. BLM/BIA Bond No. in file
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will start*	23. Estimated duration
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

GCP Rec 08/25/2020

APPROVED WITH CONDITIONS
Approval Date: 03/31/2020

KZ
09/08/2020

SL

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to a new evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: NENW / 545 FNL / 1706 FWL / TWSP: 24S / RANGE: 32E / SECTION: 11 / LAT: 32.237909 / LONG: -103.64844 (TVD: 0 feet, MD: 0 feet)

PPP: NWSW / 2653 FNL / 843 FWL / TWSP: 24S / RANGE: 32E / SECTION: 11 / LAT: 32.232122 / LONG: -103.651231 (TVD: 12334 feet, MD: 14273 feet)

PPP: NWNW / 545 FNL / 843 FWL / TWSP: 24S / RANGE: 32E / SECTION: 11 / LAT: 32.237905 / LONG: -103.65123 (TVD: 12340 feet, MD: 12899 feet)

BHL: SWSW / 100 FSL / 843 FWL / TWSP: 24S / RANGE: 32E / SECTION: 14 / LAT: 32.210624 / LONG: -103.65124 (TVD: 12300 feet, MD: 22094 feet)

BLM Point of Contact

Name: Jordan Navarrette

Title: LIE

Phone: (575) 234-5972

Email: jnavarrette@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

CONFIDENTIAL

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

<p>OPERATOR'S NAME: WELL NAME & NO.: SURFACE HOLE FOOTAGE: BOTTOM HOLE FOOTAGE LOCATION: COUNTY:</p>	<p>CIMAREX ENERGY COMPANY DOS EQUIS 11-14 FEDERAL COM 7H 390'/N & 2490'/E 100'/S & 1869'/E Section 11, T.24 S., R.32 E., NMP Lea County, New Mexico</p>
<p>OPERATOR'S NAME: WELL NAME & NO.: SURFACE HOLE FOOTAGE: BOTTOM HOLE FOOTAGE LOCATION: COUNTY:</p>	<p>CIMAREX ENERGY COMPANY DOS EQUIS 11-14 FEDERAL COM 8H 384'/N & 1136'/E 100'/S & 330'/E Section 11, T.24 S., R.32 E., NMP Lea County, New Mexico</p>
<p>OPERATOR'S NAME: WELL NAME & NO.: SURFACE HOLE FOOTAGE: BOTTOM HOLE FOOTAGE LOCATION: COUNTY:</p>	<p>CIMAREX ENERGY COMPANY DOS EQUIS 11-14 FEDERAL COM 23H 545'/N & 1746'/W 100'/S & 1869'/W Section 11, T.24 S., R.32 E., NMP Lea County, New Mexico</p>
<p>OPERATOR'S NAME: WELL NAME & NO.: SURFACE HOLE FOOTAGE: BOTTOM HOLE FOOTAGE LOCATION: COUNTY:</p>	<p>CIMAREX ENERGY COMPANY DOS EQUIS 11-14 FEDERAL COM 24H 545'/N & 1726'/E 100'/S & 1356'/E Section 11, T.24 S., R.32 E., NMP Lea County, New Mexico</p>
<p>OPERATOR'S NAME: WELL NAME & NO.: SURFACE HOLE FOOTAGE: BOTTOM HOLE FOOTAGE LOCATION: COUNTY:</p>	<p>CIMAREX ENERGY COMPANY DOS EQUIS 11-14 FEDERAL COM 25H 545'/N & 1706'/W 100'/S & 843'/W Section 11, T.24 S., R.32 E., NMP Lea County, New Mexico</p>
<p>OPERATOR'S NAME: WELL NAME & NO.: SURFACE HOLE FOOTAGE: BOTTOM HOLE FOOTAGE LOCATION: COUNTY:</p>	<p>CIMAREX ENERGY COMPANY DOS EQUIS 11-14 FEDERAL COM 49H 390'/N & 2510'/E 100'/S & 2382'/E Section 11, T.24 S., R.32 E., NMP Lea County, New Mexico</p>
<p>OPERATOR'S NAME: WELL NAME & NO.: SURFACE HOLE FOOTAGE: BOTTOM HOLE FOOTAGE LOCATION: COUNTY:</p>	<p>CIMAREX ENERGY COMPANY DOS EQUIS 11-14 FEDERAL COM 62H 384'/N & 1156'/E 100'/S & 843'/E Section 11, T.24 S., R.32 E., NMP Lea County, New Mexico</p>

OPERATOR'S NAME:	CIMAREX ENERGY COMPANY
WELL NAME & NO.:	DOS EQUIS 11-14 FEDERAL COM 63H
SURFACE HOLE FOOTAGE:	384'/N & 1176'/E
BOTTOM HOLE FOOTAGE:	100'/S & 1356'/E
LOCATION:	Section 11, T.24 S., R.32 E., NMP
COUNTY:	Lea County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- General Provisions**
- Permit Expiration**
- Archaeology, Paleontology, and Historical Sites**
- Noxious Weeds**
- Special Requirements**
 - Lesser Prairie-Chicken Timing Stipulations
 - Ground-level Abandoned Well Marker
- Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- Road Section Diagram**
- Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Access Roads
 - Central Tank Batteries
- Interim Reclamation**
- Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application for Permit to Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices to Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period.

Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted.

Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

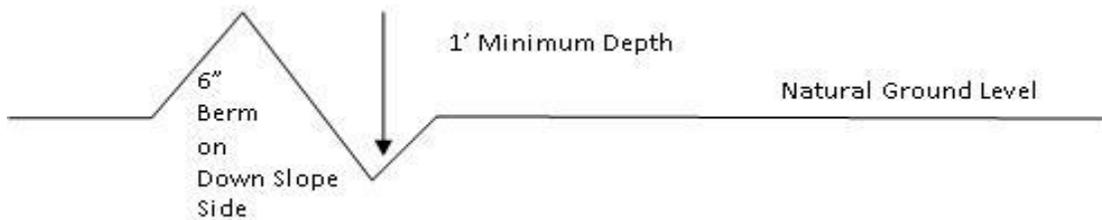

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Livestock Watering Requirement

Any damage to structures that provide water to livestock throughout the life of the well, caused by operations from the well site, must be immediately corrected by the operator. The operator must notify the BLM office (575-234-5972) and the private surface

landowner or the grazing allotment holder if any damage occurs to structures that provide water to livestock.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

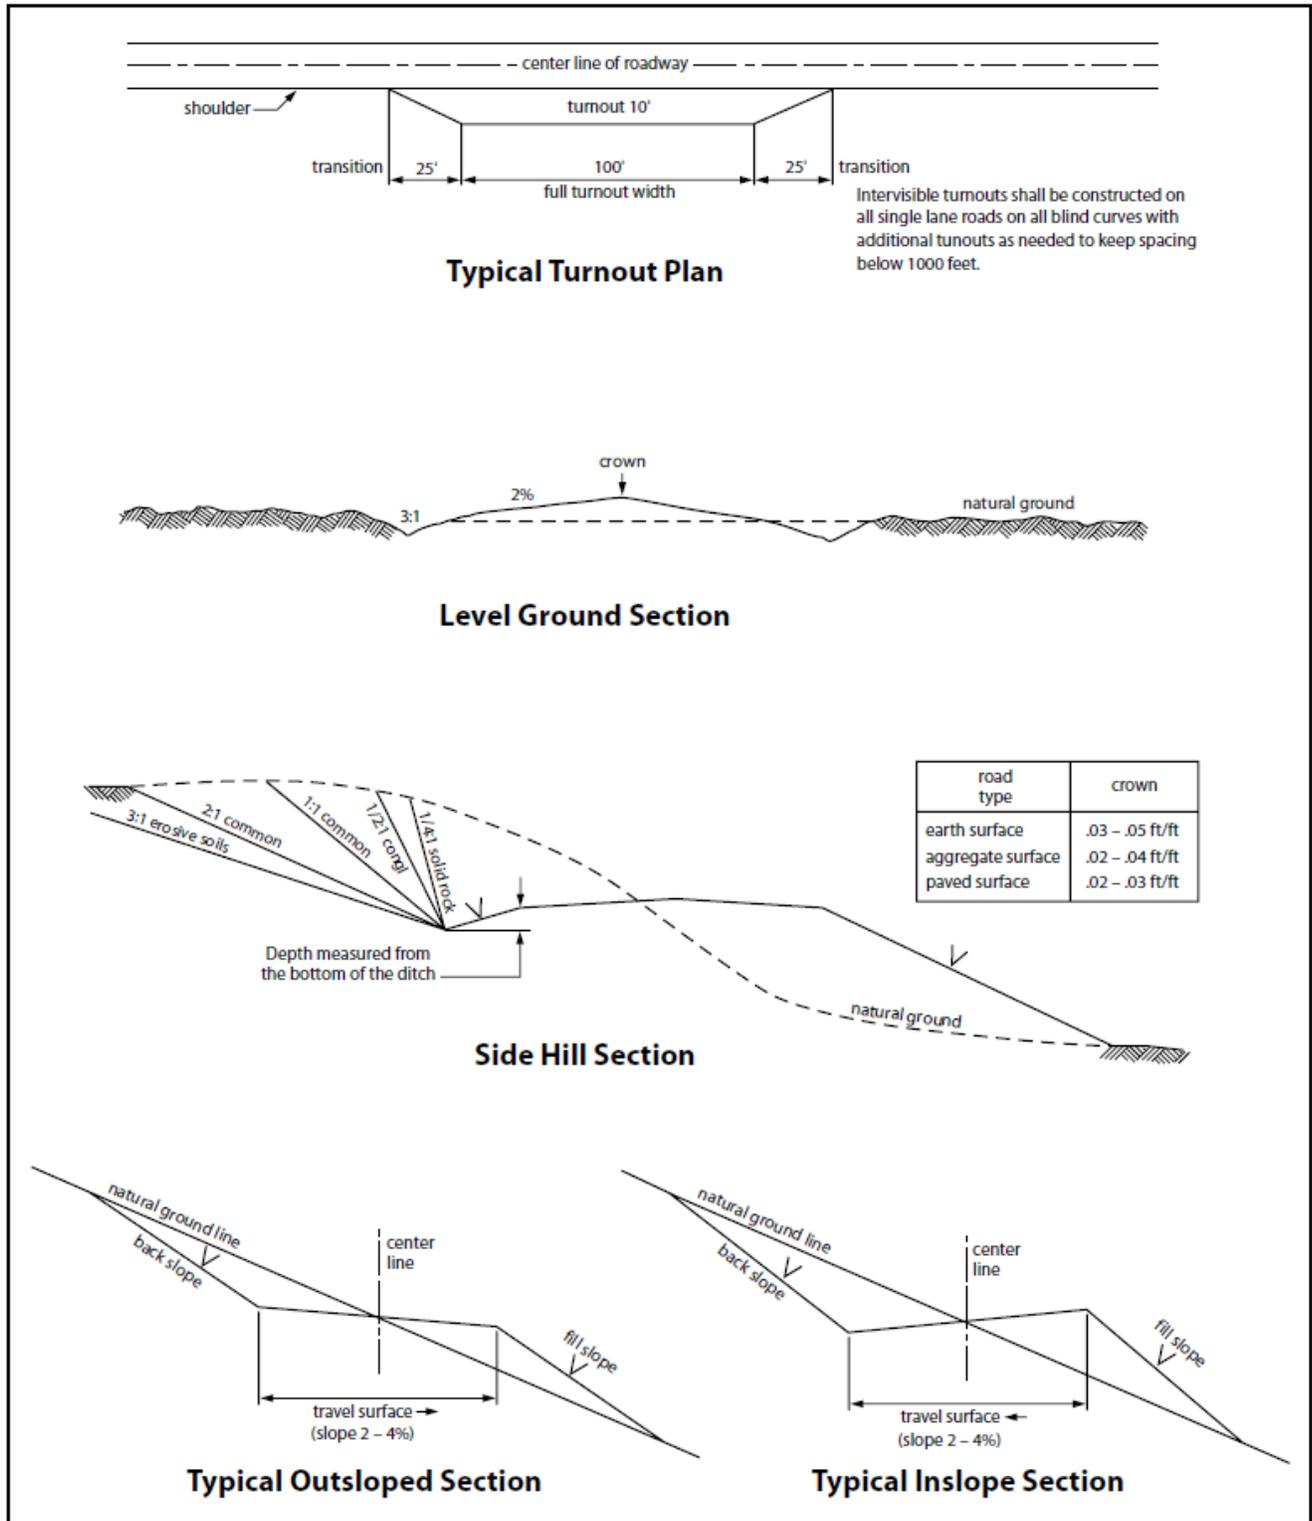


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C.6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take

such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.
6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.
7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:
 - Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
 - Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
 - The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)
8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.
9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.
11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.
12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

() seed mixture 1

() seed mixture 3

- (X) seed mixture 2 () seed mixture 4
() seed mixture 2/LPC () Aplomado Falcon Mixture

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates “Standard Environmental Colors” – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder’s name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches that are not otherwise fenced, screened, or netted to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30-degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

19. Special Stipulations:

Wildlife:

Lesser Prairie-Chicken

Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

C. SURFACE PIPELINES

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 *et seq.* (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42

U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of the holder including, but not limited to construction, operation, maintenance, and termination of the facility.
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
- c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.

6. All construction and maintenance activity will be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines

prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.

8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline will be "snaked" around hummocks and dunes rather than suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, power line corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.

18. Special Stipulations:

- a. **Lesser Prairie-Chicken:** Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted.
- b. This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.
- c. **TEMPORARY USE FRESH WATER FRAC LINE(S):**
Once the temporary use exceeds the timeline of 180 days and/or with a 90-day extension status; further analysis will be required if the applicant pursues to turn the temporary ROW into a permanent ROW.

Temporary Water Line:

Subject to the terms and conditions which are shown below, is hereby approved:

- Surface pipelines 6.5 inch to 16 inch OD may be in place for no more than 180 days not including installation. In accordance with your request, you must call the BLM with a construction date to start the 180 day time period.
 - Surface pipeline will be in operation for no more than 180 days; a maximum of seven (7) days authorized for installation of the lay flat poly line prior to operation.
 - Surface pipelines larger than 6.5 inch to-16-inch OD may be in place for no more than 180 days from date of authorization, unless a SF-299 is submitted within 30 days of this decision expiring requesting a long term buried fresh water pipeline, and processing of the SF-299 is not yet complete at the end of 30 days, in which case the line(s) may be left in place until a decision is made on the SF-299.
- All lines will be removed when no longer in use.
 - Width of authorized use is 10-feet.
- No blading and/or earthwork will be allowed in order to place the pipeline except burying the line under crossings.
 - The pipeline will be buried under all intersecting routes, including BLM-designated trails and access roads into caliche pits, rancher watering stations, etc. All such buried crossings will be removed when the pipeline is removed, unless otherwise approved by the Authorized Officer.
Pipelines larger than 6.5-inch OD may utilize other crossing methodologies (but any fill placed over pipeline must be brought in from off-site).
 - Pipeline crossings of fences should be avoided where possible. If a crossing is necessary, contact fence owner [usually the grazing permittee] prior to installation, and install by threading pipeline under the lowest wire of the fence; pipeline should never cross on top of any fence wires.
 - The pipeline shall stay within 10 feet maximum of existing disturbance (e.g. lease road, pipeline right-of-way etc.); placement should be within 5 feet whenever possible.
 - Placement of pumps or other high-maintenance equipment shall be installed along maintained lease roads.
 - Gas or diesel pumps, generators, or compressors shall be placed on visquen matting [or 20 mil plastic] and in a containment structure capable of containing all potentially released fuels. Containments must be protected against wildlife deaths in accordance with oilfield best management practices.

- Due to potential damage to natural resources, no work is allowed during inclement weather.
- Pipeline will be marked with your company's name and contact number, at beginning and ending points, at all public-road crossings, and at intervals not exceeding every 0.6 mile, unless otherwise approved by the Authorized Officer.
- Should unforeseen damage occur to resources, BLM will require reclamation of the impacted land.
- No water may be released into the environment without BLM consent.
- Placement of surface pipelines along or under public roadways may require permits from the road authority.
- This authorization is limited to lands under BLM jurisdiction. If your proposed pipeline crosses lands under private ownership or under other agency jurisdiction, you are responsible for obtaining all necessary permits and approvals from those parties.

D. OIL AND GAS RELATED

STANDARD STIPULATIONS FOR OIL AND GAS RELATED SITES

A copy of the application (Grant/Sundry Notice) and attachments, including stipulations and map, will be on location during construction. BLM personnel may request to view a copy of your permit during construction to ensure compliance with all stipulations.

The holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer, BLM.

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant and for all response costs, penalties, damages, claims, and other costs arising from the provisions of the Resource Conservation and Recovery Act (RCRA), 42 U.S.C. Chap. 82, Section 6901 et. seq., from the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA), 42 U.S.C. Chap. 109, Section 9601 et. seq., and from other applicable environmental statutes.

2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976, as amended (15 U.S.C. 2601, et. seq.) with regard to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized by this grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR,

Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation and Liability Act, Section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the Authorized Officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et. seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et. seq.) on the right-of-way (unless the release or threatened release is wholly unrelated to the right-of-way holder's activity on the right-of-way). This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the site or related pipeline(s), any oil or other pollutant should be discharged from site facilities, the pipeline(s) or from containers or vehicles impacting Federal lands, the control and total removal, disposal, and cleanup of such oil or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages to Federal lands resulting therefrom, the Authorized Officer may take such measures as deemed necessary to control and cleanup the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any liability or responsibility.

5. Sites shall be maintained in an orderly, sanitary condition at all times. Waste materials, both liquid and solid, shall be disposed of promptly at an appropriate, authorized waste disposal facility in accordance with all applicable State and Federal laws. "Waste" means all discarded matter including, but not limited to, human waste, trash, garbage, refuse, petroleum products, brines, chemicals, oil drums, ashes, and equipment.

6. The operator will notify the Bureau of Land Management (BLM) authorized officer and nearest Fish and Wildlife Service (FWS) Law Enforcement office within 24 hours, if the operator discovers a dead or injured federally protected species (i.e., migratory bird species, bald or golden eagle, or species listed by the FWS as threatened or endangered) in or adjacent to a pit, trench, tank, exhaust stack, or fence. (If the operator is unable to contact the FWS Law Enforcement office, the operator must contact the nearest FWS Ecological Services office.)

7. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" designated by the Rocky Mountain

Five-State Interagency Committee. The color selected for this project is **Shale Green**, Munsell Soil Color Chart Number 5Y 4/2.

8. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on the holder's behalf, on public or Federal land shall be immediately reported to the Authorized Officer. The holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to the proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

9. A sales contract for removal of mineral material (caliche, sand, gravel, fill dirt) from an authorized pit, site, or on location must be obtained from the BLM prior to commencing construction. There are several options available for purchasing mineral material: contact the BLM office (575-234-5972).

10. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

11. Once the site is no longer in service or use, the site must undergo final abandonment. At final abandonment, the site and access roads must undergo "final" reclamation so that the character and productivity of the land are restored. Earthwork for final reclamation must be completed within six (6) months of the abandonment of the site. All pads and facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact. After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

12. The holder shall stockpile an adequate amount of topsoil where blading occurs. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles. The topsoil will be used for final reclamation.

13. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

- | | |
|--|--|
| <input type="checkbox"/> seed mixture 1 | <input type="checkbox"/> seed mixture 3 |
| <input checked="" type="checkbox"/> seed mixture 2 | <input type="checkbox"/> seed mixture 4 |
| <input type="checkbox"/> seed mixture 2/LPC | <input type="checkbox"/> Aplomado Falcon Mixture |

14. In those areas where erosion control structures are required to stabilize soil conditions, the holder shall install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound management practices. Any earth work will require prior approval by the Authorized Officer.

15. Open-topped Tanks - The operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps

16. The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an

impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclusion systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

17. Open-Vent Exhaust Stack Enclosures – The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (Recommended enclosure structures on open-vent exhaust stacks are in the shape of a cone.) Production

equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

18. Containment Structures - Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

19. Special Stipulations:

Wildlife:

Lesser Prairie-Chicken

Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted. Exhaust noise from permanent engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

Hydrology:

The entire well pad(s) will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad. The compacted berm shall be constructed at a minimum of 12 inches with impermeable mineral material (e.g. caliche). Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed. Any water erosion that may occur due to the construction of the well pad during the life of the well will be quickly corrected and proper measures will be taken to prevent future erosion. Stockpiling of topsoil is required. The top soil shall be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and not used for berming or erosion control. If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.

TANK BATTERY:

Tank battery locations will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must

be large enough to contain 1 ½ times the content of the largest tank or 24 hour production, whichever is greater. Automatic shut off, check valves, or similar systems will be installed for tanks to minimize the effects of catastrophic line failures used in production or drilling.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sand love grass (<i>Eragrostis trichodes</i>)	1.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Cimarex Energy Company
LEASE NO.:	NMNM0001917
WELL NAME & NO.:	Dos Equis 11-14 Federal Com 25H
SURFACE HOLE FOOTAGE:	545'/N & 1706'/W
BOTTOM HOLE FOOTAGE:	100'/S & 843'/W
LOCATION:	Section 11, T.24 S., R.32 E., NMPM
COUNTY:	Lea County, New Mexico

COA

H2S	<input checked="" type="radio"/> Yes	<input type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the **Double X Pool (Delaware)** formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

1. The **10-3/4 inch** surface casing shall be set at approximately **1,250 feet** (a minimum of **25 feet (Lea County)**) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the **7-5/8 inch** intermediate casing and shall be set at approximately **12,291 feet** is:

Option 1:

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
 - b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
3. The minimum required fill of cement behind the **5-1/2 inch** production casing is:

(Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5,000 (5M) psi**.
3. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **10,000 (10M) psi**.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822

Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including

lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

YJ (03/28/2020)

1. Geological Formations

TVD of target 12,300

Pilot Hole TD N/A

MD at TD 22,094

Deepest expected fresh water

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone	Hazards
Rustler	1166	N/A	
Salado (Top Salt)	1390	N/A	
Base of Salt	4684	N/A	
Lamar	4910	N/A	
Bell Canyon	4965	N/A	
Cherry Canyon	5858	N/A	
Brushy Canyon	7222	Hydrocarbons	
Bone Spring	8779	Hydrocarbons	
Leonard Shale	8892	Hydrocarbons	
Avalon Shale	9219	Hydrocarbons	
1st Bone Spring Sand	9944	Hydrocarbons	
2nd Bone Spring Carb	10108	Hydrocarbons	
2nd Bone Spring Sand	10478	Hydrocarbons	
3rd Bone Spring Carb	11036	Hydrocarbons	
3rd Bone Spring Sand	11845	Hydrocarbons	
Wolfcamp	12228	Hydrocarbons	
Wolfcamp (target)	12340	Hydrocarbons	

2. Casing Program

Hole Size	Casing Depth From	Casing Depth To	Setting Depth TVD	Casing Size	Weight (lb/ft)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
14 3/4	0	1216	1216	10-3/4"	40.50	J-55	BT&C	2.84	5.63	12.77
9 7/8	0	12518	12291	7-5/8"	29.70	L-80	BT&C	2.50	1.20	1.82
6 3/4	0	11893	11893	5-1/2"	20.00	L-80	LT&C	1.14	1.19	1.88
6 3/4	11893	22094	12300	5"	18.00	P-110	BT&C	1.68	1.70	79.17
BLM Minimum Safety Factor								1.125	1	1.6 Dry 1.8 Wet

TVD was used on all calculations.

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Request Variance for 5-1/2" x 7-5/8" annular clearance. The portion that does not meet clearance will not be cemented

Cimarex Energy Co., Dos Equis 11-14 Federal Com 25H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	N
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3rd string cement tied back 500' into previous casing?	N
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	N
Is 2nd string set 100' to 600' below the base of salt?	N
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	N
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	N
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	N
Is AC Report included?	Y

3. Cementing Program

Casing	# Sk	Wt. lb/gal	Yld ft ³ /sack	H ₂ O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surface	472	13.50	1.72	9.15	15.5	Lead: Class C + Bentonite
	127	14.80	1.34	6.32	9.5	Tail: Class C + LCM
Intermediate Stage 1	586	10.30	3.64	22.18		Lead: Tuned Light + LCM
	198	14.80	1.36	6.57	9.5	Tail: Class C + Retarder
Intermediate Stage 2	785	12.90	1.88	9.65	12	Lead: 35:65 (Poz:C) + Salt + Bentonite
Production	820	14.20	1.30	5.86	14:30	Tail: 50:50 (Poz:H) + Salt + Bentonite + Fluid Loss + Dispersant + SMS

DV tool with possible annular casing packer as needed is proposed at a depth of +/- 4,910'.

Casing String	TOC	% Excess
Surface	0	45
Intermediate Stage 1	4910	47
Intermediate Stage 2	0	37
Production	11893	25

Cimarex request the ability to perform casing integrity tests after plug bump of cement job.

4. Pressure Control Equipment

	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
--	--

BOP installed and tested before drilling which hole?	Size	Min Required WP	Type		Tested To
9 7/8	13 5/8	5M	Annular	X	50% of working pressure
			Blind Ram		
			Pipe Ram	X	5M
			Double Ram	X	
			Other		
6 3/4	13 5/8	10M	Annular	X	50% of working pressure
			Blind Ram		10M
			Pipe Ram	X	
			Double Ram	X	
			Other		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

X	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
X	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?

5. Mud Program

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0' to 1216'	FW Spud Mud	8.30 - 8.80	30-32	N/C
1216' to 12518'	Brine Diesel Emulsion	8.50 - 9.00	30-35	N/C
12518' to 22094'	Oil Based Mud	12.00 - 12.50	30-35	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The Brine Emulsion is completely saturated brine fluid that ties diesel into itself to lower the weight of the fluid. The drilling fluid is completely salt saturated.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing	
	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No logs are planned based on well control or offset log information.
	Drill stem test?
	Coring?

Additional Logs Planned	Interval

7. Drilling Conditions

Condition	
BH Pressure at deepest TVD	7995 psi
Abnormal Temperature	No

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
X	H2S is present
X	H2S plan is attached

8. Other Facets of Operation

9. Wellhead

A multi-bowl wellhead system will be utilized.

After running the 10-3/4" surface casing, a 13 5/8" BOP/BOPE system with a minimum working pressure of 10000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 10000 psi test. Annular will be tested to 50% of working pressure. The pressure test will be repeated at least every 30 days, as per Onshore Order No. 2.

The multi-bowl wellhead will be installed by vendor's representative. A copy of the installation instructions has been sent to the BLM field office.

The wellhead will be installed by a third-party welder while being monitored by the wellhead vendor representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 10000 psi.

All casing strings will be tested as per Onshore Order No.2 to atleast 0.22 psi/ft or 1,500 whichever is greater and not to exceed 70% of casing burst.

If well conditions dictate conventional slips will be set and BOPE will be tested to appropriate pressures based on permitted pressure requirements.

- 1 All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:
 - A. Characteristics of H₂S
 - B. Physical effects and hazards
 - C. Principal and operation of H₂S detectors, warning system and briefing areas.
 - D. Evacuation procedure, routes and first aid.
 - E. Proper use of safety equipment & life support systems
 - F. Essential personnel meeting Medical Evaluation criteria will receive additional training on the proper use of 30 minute pressure demand air packs.

H₂S Detection and Alarm Systems:

 - A. H₂S sensors/detectors to be located on the drilling rig floor, in the base of the sub structure/cellar area, on the mud pits in the shale shaker area. Additional H₂S detectors may play placed as deemed necessary.
 - B. An audio alarm system will be installed on the derrick floor and in the top doghouse.
- 3 Windsock and/or wind streamers:
 - A. Windsock at mudpit area should be high enough to be visible.
 - B. Windsock on the rig floor and / or top doghouse should be high enough to be visible.
- 4 Condition Flags and Signs
 - A. Warning sign on access road to location.
 - B. Flags to be displayed on sign at entrance to location. Green flag indicates normal safe condition. Yellow flag indicates potential pressure and danger. Red flag indicates danger (H₂S present in dangerous concentration). Only H₂S trained and certified personnel admitted to location.
- 5 Well control equipment:
 - A. See exhibit "E-1"
- 6 Communication:
 - A. While working under masks chalkboards will be used for communication.
 - B. Hand signals will be used where chalk board is inappropriate.
 - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.
- 7 Drillstem Testing:

No DSTs r cores are planned at this time.
- 8 Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubular goods and other mechanical equipment.
- 9 If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary.

H₂S Contingency Plan
Dos Equis 11-14 Fed Com 25H
Cimarex Energy Co.
UL: A, Sec. 11, 24S, 32E Lea Co., NM

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must:

- « Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- « Evacuate any public places encompassed by the 100 ppm ROE.
- « Be equipped with H₂S monitors and air packs in order to control the release.
- « Use the "buddy system" to ensure no injuries occur during the 432-620-1975
- « Take precautions to avoid personal injury during this operation.
- « Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- « Have received training in the:
 - Detection of H₂S, and
 - Measures for protection against the gas,
 - Equipment used for protection and emergency response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally, the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas.

Characteristics of H₂S and SO₂

Please see attached International Chemical Safety Cards.

Contacting Authorities

Cimarex Energy Co. of Colorado's personnel must liaise with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. Cimarex Energy Co. of Colorado's response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER).

H₂S Contingency Plan Emergency Contact
 s Dos Equis 11-14 Fed Com 25H
 Cimarex Energy Co.
 UL: A, Sec. 11, 24S, 32E
 Lea Co., NM

Company Office			
Cimarex Energy Co. of Colorado		800-969-4789	
Co. Office and After-Hours Menu			
Key Personnel			
Name	Title	Office	Mobile
Larry Seigrist	Drilling Manager	432-620-1934	580-243-8485
Charlie Pritchard	Drilling Superintendent	432-620-1975	432-238-7084
Roy Shirley	Construction Superintendent		432-634-2136

Artesia	
Ambulance	911
State Police	575-746-2703
City Police	575-746-2703
Sheriff's Office	575-746-9888
Fire Department	575-746-2701
Local Emergency Planning Committee	575-746-2122
New Mexico Oil Conservation Division	575-748-1283

Carlsbad	
Ambulance	911
State Police	575-885-3137
City Police	575-885-2111
Sheriff's Office	575-887-7551
Fire Department	575-887-3798
Local Emergency Planning Committee	575-887-6544
US Bureau of Land Management	575-887-6544

Santa Fe	
New Mexico Emergency Response Commission (Santa Fe)	505-476-9600
New Mexico Emergency Response Commission (Santa Fe) 24 Hrs	505-827-9126
New Mexico State Emergency Operations Center	505-476-9635

National	
National Emergency Response Center (Washington, D.C.)	800-424-8802

Medical	
Flight for Life - 4000 24th St.; Lubbock, TX	806-743-9911
Aerocare - R3, Box 49F; Lubbock, TX	806-747-8923
Med Flight Air Amb - 2301 Yale Blvd S.E., #D3; Albuquerque, NM	505-842-4433
SB Air Med Service - 2505 Clark Carr Loop S.E.; Albuquerque, NM	505-842-4949

Other			
Boots & Coots IWC	800-256-9688	or	281-931-8884
Cudd Pressure Control	432-699-0139	or	432-563-3356
Halliburton	575-746-2757		
B.J. Services	575-746-3569		

Cimarex Dos Equis 11-14 Federal Com 25H Rev0 RM 05Sept19 Proposal

Geodetic Report

(Non-Def Plan)



Report Date: September 05, 2019 - 04:13 PM
Client: Cimarex Energy
Field: NM Lea County (NAD 83)
Structure / Slot: Cimarex Dos Equis 11-14 Federal Com 25H / New Slot
Well: Dos Equis 11-14 Federal Com 25H
Borehole: Dos Equis 11-14 Federal Com 25H
UWI / API#: Unknown / Unknown
Survey Name: Cimarex Dos Equis 11-14 Federal Com 25H Rev0 RM 05Sept19
Survey Date: September 05, 2019
Tort / AHD / DDI / ERD Ratio: 107.465 ° / 10787.522 ft / 6.317 / 0.874
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 14' 16.4708", W 103° 38' 54.38252"
Location Grid N/E Y/X: N 450959.860 ftUS, E 753098.540 ftUS
CRS Grid Convergence Angle: 0.3654 °
Grid Scale Factor: 0.99996045
Version / Patch: 2.10.782.0

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 179.657 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3644.300 ft above MSL
Seabed / Ground Elevation: 3618.300 ft above MSL
Magnetic Declination: 6.671 °
Total Gravity Field Strength: 998.4358mgn (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47890.245 nT
Magnetic Dip Angle: 59.898 °
Declination Date: September 05, 2019
Magnetic Declination Model: HDGM 2019
North Reference: Grid North
Grid Convergence Used: 0.3654 °
Total Corr Mag North->Grid North: 6.3053 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim (Grid) (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
SHL [545' FNL, 1706' FWL]	0.00	0.00	184.62	0.00	0.00	0.00	0.00	N/A	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	100.00	0.00	269.55	100.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	200.00	0.00	269.55	200.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	300.00	0.00	269.55	300.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	400.00	0.00	269.55	400.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	500.00	0.00	269.55	500.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	600.00	0.00	269.55	600.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	700.00	0.00	269.55	700.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	800.00	0.00	269.55	800.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	900.00	0.00	269.55	900.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	1000.00	0.00	269.55	1000.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	1100.00	0.00	269.55	1100.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
Rustler	1166.00	0.00	269.55	1166.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	1200.00	0.00	269.55	1200.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	1300.00	0.00	269.55	1300.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
Salado (Top Salt)	1390.00	0.00	269.55	1390.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	1400.00	0.00	269.55	1400.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	1500.00	0.00	269.55	1500.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	1600.00	0.00	269.55	1600.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	1700.00	0.00	269.55	1700.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	1800.00	0.00	269.55	1800.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	1900.00	0.00	269.55	1900.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	2000.00	0.00	269.55	2000.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	2100.00	0.00	269.55	2100.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	2200.00	0.00	269.55	2200.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
Nudge 2°/100' DLS	2300.00	0.00	269.55	2300.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
	2400.00	2.00	269.55	2399.98	0.00	-0.01	-1.75	2.00	450959.85	753096.79	N 32 14 16.47	W 103 38 54.40
	2500.00	4.00	269.55	2499.84	0.01	-0.05	-6.98	2.00	450959.81	753091.56	N 32 14 16.47	W 103 38 54.46
	2600.00	6.00	269.55	2599.45	0.03	-0.12	-15.69	2.00	450959.74	753082.85	N 32 14 16.47	W 103 38 54.57
	2700.00	8.00	269.55	2698.70	0.05	-0.22	-27.88	2.00	450959.64	753070.66	N 32 14 16.47	W 103 38 54.71
Hold Nudge	2730.39	8.61	269.55	2728.77	0.06	-0.25	-32.27	2.00	450959.61	753066.27	N 32 14 16.47	W 103 38 54.76
	2800.00	8.61	269.55	2797.60	0.08	-0.34	-42.69	0.00	450959.52	753055.86	N 32 14 16.47	W 103 38 54.88
	2900.00	8.61	269.55	2896.47	0.11	-0.45	-57.65	0.00	450959.41	753040.89	N 32 14 16.47	W 103 38 55.05
	3000.00	8.61	269.55	2995.35	0.14	-0.57	-72.62	0.00	450959.29	753025.92	N 32 14 16.47	W 103 38 55.23
	3100.00	8.61	269.55	3094.22	0.16	-0.69	-87.59	0.00	450959.17	753010.96	N 32 14 16.47	W 103 38 55.40
	3200.00	8.61	269.55	3193.09	0.19	-0.81	-102.55	0.00	450959.05	752995.99	N 32 14 16.47	W 103 38 55.58
	3300.00	8.61	269.55	3291.97	0.22	-0.92	-117.52	0.00	450958.94	752981.03	N 32 14 16.47	W 103 38 55.75
	3400.00	8.61	269.55	3390.84	0.25	-1.04	-132.49	0.00	450958.82	752966.06	N 32 14 16.47	W 103 38 55.93
	3500.00	8.61	269.55	3489.71	0.28	-1.16	-147.45	0.00	450958.70	752951.09	N 32 14 16.47	W 103 38 56.10
	3600.00	8.61	269.55	3588.59	0.30	-1.28	-162.42	0.00	450958.58	752936.13	N 32 14 16.47	W 103 38 56.27
	3700.00	8.61	269.55	3687.46	0.33	-1.39	-177.38	0.00	450958.47	752921.16	N 32 14 16.47	W 103 38 56.45
	3800.00	8.61	269.55	3786.33	0.36	-1.51	-192.35	0.00	450958.35	752906.20	N 32 14 16.47	W 103 38 56.62
	3900.00	8.61	269.55	3885.21	0.39	-1.63	-207.32	0.00	450958.23	752891.23	N 32 14 16.47	W 103 38 56.80
	4000.00	8.61	269.55	3984.08	0.42	-1.75	-222.28	0.00	450958.11	752876.26	N 32 14 16.47	W 103 38 56.97
	4100.00	8.61	269.55	4082.96	0.44	-1.86	-237.25	0.00	450958.00	752861.30	N 32 14 16.47	W 103 38 57.14
	4200.00	8.61	269.55	4181.83	0.47	-1.98	-252.22	0.00	450957.88	752846.33	N 32 14 16.47	W 103 38 57.32
	4300.00	8.61	269.55	4280.70	0.50	-2.10	-267.18	0.00	450957.76	752831.37	N 32 14 16.47	W 103 38 57.49
	4400.00	8.61	269.55	4379.58	0.53	-2.22	-282.15	0.00	450957.64	752816.40	N 32 14 16.47	W 103 38 57.67
	4500.00	8.61	269.55	4478.45	0.55	-2.33	-297.12	0.00	450957.53	752801.44	N 32 14 16.47	W 103 38 57.84
	4600.00	8.61	269.55	4577.32	0.58	-2.45	-312.08	0.00	450957.41	752786.47	N 32 14 16.47	W 103 38 58.02
	4700.00	8.61	269.55	4676.20	0.61	-2.57	-327.05	0.00	450957.29	752771.50	N 32 14 16.47	W 103 38 58.19
Base Salt	4707.89	8.61	269.55	4684.00	0.61	-2.58	-328.23	0.00	450957.26	752770.32	N 32 14 16.47	W 103 38 58.20
	4800.00	8.61	269.55	4775.07	0.64	-2.69	-342.02	0.00	450957.17	752756.54	N 32 14 16.47	W 103 38 58.36
	4900.00	8.61	269.55	4873.94	0.67	-2.80	-356.98	0.00	450957.06	752741.57	N 32 14 16.47	W 103 38 58.54
Lamar	4936.47	8.61	269.55	4910.00	0.68	-2.85	-362.44	0.00	450957.01	752736.11	N 32 14 16.47	W 103 38 58.60
Bell Canyon	4992.09	8.61	269.55	4965.00	0.69	-2.91	-370.77	0.00	450956.95	752727.79	N 32 14 16.47	W 103 38 58.70
	5000.00	8.61	269.55	4972.82	0.69	-2.92	-371.95	0.00	450956.94	752726.61	N 32 14 16.47	W 103 38 58.71
	5100.00	8.61	269.55	5071.69	0.72	-3.04	-386.92	0.00	450956.82	752711.64	N 32 14 16.47	W 103 38 58.89
	5200.00	8.61	269.55	5170.57	0.75	-3.16	-401.88	0.00	450956.70	752696.67	N 32 14 16.46	W 103 38 59.06
	5300.00	8.61	269.55	5269.44	0.78	-3.27	-416.85	0.00	450956.59	752681.71	N 32 14 16.46	W 103 38 59.24
	5400.00	8.61	269.55	5368.31	0.81	-3.39	-431.82	0.00	450956.47	752666.74	N 32 14 16.46	W 103 38 59.41
	5500.00	8.61	269.55	5467.19	0.83	-3.51	-446.78	0.00	450956.35	752651.78	N 32 14 16.46	W 103 38 59.58
	5600.00	8.61	269.55	5566.06	0.86	-3.63	-461.75	0.00	450956.23	752636.81	N 32 14 16.46	W 103 38 59.76
	5700.00	8.61	269.55	5664.93	0.89	-3.74	-476.72	0.00	450956.12	752621.84	N 32 14 16.46	W 103 38 59.93
	5800.00	8.61	269.55	5763.81	0.92	-3.86	-491.68	0.00	450956.00	752606.88	N 32 14 16.46	W 103 39 0.11
Cherry Canyon	5895.27	8.61	269.55	5888.00	0.94	-3.97	-505.94	0.00	450955.89	752592.62	N 32 14 16.46	W 103 39 0.27
	5900.00	8.61	269.55	5882.68	0.95	-3.98	-506.65	0.00	450955.88	752591.91	N 32 14 16.46	W 103 39 0.28
	6000.00	8.61	269.55	5961.55	0.97	-4.10	-521.62	0.00	450955.76	752576.95	N 32 14 16.46	W 103 39 0.46
	6100.00	8.61	269.55	6060.43	1.00	-4.21	-536.58	0.00	450955.65	752561.98	N 32 14 16.46	W 103 39 0.63
	6200.00	8.61	269.55	6159.30	1.03	-4.33	-551.55	0.00	450955.53	752547.01	N 32 14 16.46	W 103 39 0.80
	6300.00	8.61	269.55	6258.17	1.06	-4.45	-566.51	0.00	450955.41	752532.05	N 32 14 16.46	W 103 39 0.98
	6400.00	8.61	269.55	6357.05	1.09	-4.57	-581.48	0.00	450955.29	752517.08	N 32 14 16.46	W 103 39 1.15

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
	6800.00	8.61	269.55	6752.54	1.20	-5.04	-641.35	0.00	450954.82	752457.22	N 32 14 16.46	W 103 39 1.85
	6900.00	8.61	269.55	6851.42	1.23	-5.15	-656.31	0.00	450954.71	752442.25	N 32 14 16.46	W 103 39 2.02
	7000.00	8.61	269.55	6950.29	1.25	-5.27	-671.28	0.00	450954.59	752427.29	N 32 14 16.46	W 103 39 2.20
	7100.00	8.61	269.55	7049.16	1.28	-5.39	-686.25	0.00	450954.47	752412.32	N 32 14 16.46	W 103 39 2.37
	7200.00	8.61	269.55	7148.04	1.31	-5.51	-701.21	0.00	450954.35	752397.36	N 32 14 16.46	W 103 39 2.55
Brushy Canyon	7274.81	8.61	269.55	7222.00	1.33	-5.60	-712.41	0.00	450954.26	752386.16	N 32 14 16.46	W 103 39 2.68
	7300.00	8.61	269.55	7246.91	1.34	-5.62	-716.18	0.00	450954.24	752382.39	N 32 14 16.46	W 103 39 2.72
	7400.00	8.61	269.55	7345.78	1.37	-5.74	-731.15	0.00	450954.12	752367.42	N 32 14 16.46	W 103 39 2.90
	7500.00	8.61	269.55	7444.66	1.39	-5.86	-746.11	0.00	450954.00	752352.46	N 32 14 16.46	W 103 39 3.07
	7600.00	8.61	269.55	7543.53	1.42	-5.98	-761.08	0.00	450953.88	752337.49	N 32 14 16.46	W 103 39 3.24
	7700.00	8.61	269.55	7642.41	1.45	-6.10	-776.05	0.00	450953.77	752322.53	N 32 14 16.46	W 103 39 3.42
	7800.00	8.61	269.55	7741.28	1.48	-6.21	-791.01	0.00	450953.65	752307.56	N 32 14 16.46	W 103 39 3.59
	7900.00	8.61	269.55	7840.15	1.51	-6.33	-805.98	0.00	450953.53	752292.59	N 32 14 16.46	W 103 39 3.77
	8000.00	8.61	269.55	7939.03	1.53	-6.45	-820.95	0.00	450953.41	752277.63	N 32 14 16.46	W 103 39 3.94
Drop to Vertical 2 1/100' DLS	8061.67	8.61	269.55	8000.00	1.55	-6.52	-830.18	0.00	450953.34	752268.40	N 32 14 16.46	W 103 39 4.05
	8100.00	7.84	269.55	8037.94	1.56	-6.56	-835.66	2.00	450953.30	752262.92	N 32 14 16.46	W 103 39 4.11
	8200.00	5.84	269.55	8137.22	1.58	-6.66	-847.57	2.00	450953.20	752251.01	N 32 14 16.46	W 103 39 4.25
	8300.00	3.84	269.55	8236.96	1.60	-6.72	-856.01	2.00	450953.14	752242.57	N 32 14 16.46	W 103 39 4.35
	8400.00	1.84	269.55	8336.73	1.61	-6.76	-860.96	2.00	450953.10	752237.61	N 32 14 16.46	W 103 39 4.41
Hold Vertical	8492.06	0.00	269.55	8428.77	1.61	-6.77	-862.44	2.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	8500.00	0.00	269.55	8436.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	8600.00	0.00	269.55	8536.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	8700.00	0.00	269.55	8636.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	8800.00	0.00	269.55	8736.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
Bone Spring	8842.29	0.00	269.55	8779.00	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	8900.00	0.00	269.55	8836.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
Leonard Shale	8955.29	0.00	269.55	8892.00	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	9000.00	0.00	269.55	8936.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	9100.00	0.00	269.55	9036.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	9200.00	0.00	269.55	9136.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
Avalon Shale	9282.29	0.00	269.55	9219.00	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	9300.00	0.00	269.55	9236.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	9400.00	0.00	269.55	9336.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	9500.00	0.00	269.55	9436.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	9600.00	0.00	269.55	9536.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	9700.00	0.00	269.55	9636.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	9800.00	0.00	269.55	9736.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	9900.00	0.00	269.55	9836.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	10000.00	0.00	269.55	9936.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
1st Bone Spring Sand	10007.29	0.00	269.55	9944.00	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	10100.00	0.00	269.55	10036.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
2nd Bone Spring Carb	10171.29	0.00	269.55	10108.00	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	10200.00	0.00	269.55	10136.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	10300.00	0.00	269.55	10236.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	10400.00	0.00	269.55	10336.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	10500.00	0.00	269.55	10436.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
2nd Bone Spring Sand	10541.29	0.00	269.55	10478.00	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	10600.00	0.00	269.55	10536.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	10700.00	0.00	269.55	10636.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	10800.00	0.00	269.55	10736.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	10900.00	0.00	269.55	10836.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	11000.00	0.00	269.55	10936.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
3rd Bone Spring Carb	11099.29	0.00	269.55	11036.00	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	11100.00	0.00	269.55	11036.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	11200.00	0.00	269.55	11136.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	11300.00	0.00	269.55	11236.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	11400.00	0.00	269.55	11336.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	11500.00	0.00	269.55	11436.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	11600.00	0.00	269.55	11536.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	11700.00	0.00	269.55	11636.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	11800.00	0.00	269.55	11736.71	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
KOP - Build 12 1/100' DLS	11893.30	0.00	269.55	11830.01	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
	11900.00	0.80	179.66	11836.71	1.66	-6.82	-862.44	12.00	450953.04	752236.13	N 32 14 16.46	W 103 39 4.42
3rd Bone Spring Sand	11908.29	1.80	179.66	11845.00	1.85	-7.01	-862.44	12.00	450952.85	752236.13	N 32 14 16.46	W 103 39 4.42
	12000.00	12.80	179.66	11935.83	13.48	-18.65	-862.37	12.00	450941.21	752236.20	N 32 14 16.34	W 103 39 4.42
	12100.00	24.80	179.66	12030.32	45.66	-50.82	-862.18	12.00	450909.04	752236.40	N 32 14 16.02	W 103 39 4.42
	12200.00	36.80	179.66	12116.05	96.78	-101.94	-861.87	12.00	450857.93	752236.70	N 32 14 15.52	W 103 39 4.42
	12300.00	48.80	179.66	12189.29	164.60	-169.76	-861.47	12.00	450790.10	752237.11	N 32 14 14.85	W 103 39 4.42
Wolfcamp	12363.84	56.46	179.66	12228.00	215.30	-220.46	-861.16	12.00	450739.41	752237.41	N 32 14 14.34	W 103 39 4.42
	12400.00	60.80	179.66	12246.82	246.17	-251.33	-860.98	12.00	450708.54	752237.60	N 32 14 14.04	W 103 39 4.42
	12500.00	72.80	179.66	12286.13	337.92	-343.08	-860.43	12.00	450616.80	752238.15	N 32 14 13.13	W 103 39 4.43
Build 4 1/100' DLS	12518.30	75.00	179.66	12291.21	355.50	-360.66	-860.32	12.00	450599.22	752238.25	N 32 14 12.96	W 103 39 4.43
	12600.00	78.27	179.66	12310.09	434.98	-440.13	-859.85	4.00	450519.74	752238.73	N 32 14 12.17	W 103 39 4.43
	12700.00	82.27	179.66	12326.99	533.52	-538.67	-859.26	4.00	450421.21	752239.32	N 32 14 11.19	W 103 39 4.43
Wolfcamp Y SS	12700.07	82.27	179.66	12327.00	533.59	-538.74	-859.26	4.00	450421.14	752239.32	N 32 14 11.19	W 103 39 4.43
	12800.00	86.27	179.66	12336.98	633.00	-638.15	-858.66	4.00	450321.74	752239.91	N 32 14 10.21	W 103 39 4.43
Wolfcamp Y SS Target	12887.06	89.75	179.66	12340.00	719.99	-725.15	-858.14	4.00	450234.75	752240.43	N 32 14 9.35	W 103 39 4.43
Wolfcamp Y SS Target Landing Point	12899.53	90.25	179									

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
	14500.00	90.25	179.66	12333.04	2332.92	-2338.04	-848.49	0.00	448621.92	752250.09	N 32 13 53.39	W 103 39 4.43
	14600.00	90.25	179.66	12332.60	2432.92	-2438.04	-847.89	0.00	448521.92	752250.69	N 32 13 52.40	W 103 39 4.43
	14700.00	90.25	179.66	12332.17	2532.92	-2538.03	-847.29	0.00	448421.93	752251.28	N 32 13 51.41	W 103 39 4.43
	14800.00	90.25	179.66	12331.73	2632.92	-2638.03	-846.69	0.00	448321.94	752251.88	N 32 13 50.42	W 103 39 4.43
	14900.00	90.25	179.66	12331.30	2732.91	-2738.03	-846.09	0.00	448221.95	752252.48	N 32 13 49.43	W 103 39 4.44
	15000.00	90.25	179.66	12330.86	2832.91	-2838.03	-845.50	0.00	448121.95	752253.08	N 32 13 48.44	W 103 39 4.44
	15100.00	90.25	179.66	12330.43	2932.91	-2938.02	-844.90	0.00	448021.96	752253.68	N 32 13 47.45	W 103 39 4.44
	15200.00	90.25	179.66	12329.99	3032.91	-3038.02	-844.30	0.00	447921.97	752254.28	N 32 13 46.46	W 103 39 4.44
	15300.00	90.25	179.66	12329.56	3132.91	-3138.02	-843.70	0.00	447821.97	752254.88	N 32 13 45.47	W 103 39 4.44
	15400.00	90.25	179.66	12329.12	3232.91	-3238.01	-843.10	0.00	447721.98	752255.47	N 32 13 44.48	W 103 39 4.44
	15500.00	90.25	179.66	12328.69	3332.91	-3338.01	-842.50	0.00	447621.99	752256.07	N 32 13 43.49	W 103 39 4.44
	15600.00	90.25	179.66	12328.25	3432.91	-3438.01	-841.90	0.00	447521.99	752256.67	N 32 13 42.50	W 103 39 4.44
	15700.00	90.25	179.66	12327.82	3532.91	-3538.01	-841.31	0.00	447422.00	752257.27	N 32 13 41.52	W 103 39 4.44
	15800.00	90.25	179.66	12327.38	3632.91	-3638.00	-840.71	0.00	447322.01	752257.87	N 32 13 40.53	W 103 39 4.44
Wolfcamp Y SS	15887.67	90.25	179.66	12327.00	3720.58	-3725.68	-840.18	0.00	447234.34	752258.39	N 32 13 39.66	W 103 39 4.44
	15900.00	90.25	179.66	12326.95	3732.90	-3738.00	-840.11	0.00	447222.01	752258.47	N 32 13 39.54	W 103 39 4.44
	16000.00	90.25	179.66	12326.51	3832.90	-3838.00	-839.51	0.00	447122.02	752259.07	N 32 13 38.55	W 103 39 4.44
	16100.00	90.25	179.66	12326.08	3932.90	-3938.00	-838.91	0.00	447022.03	752259.66	N 32 13 37.56	W 103 39 4.44
	16200.00	90.25	179.66	12325.64	4032.90	-4037.99	-838.31	0.00	446922.03	752260.26	N 32 13 36.57	W 103 39 4.44
	16300.00	90.25	179.66	12325.21	4132.90	-4137.99	-837.71	0.00	446822.04	752260.86	N 32 13 35.58	W 103 39 4.44
	16400.00	90.25	179.66	12324.77	4232.90	-4237.99	-837.12	0.00	446722.05	752261.46	N 32 13 34.59	W 103 39 4.44
	16500.00	90.25	179.66	12324.34	4332.90	-4337.98	-836.52	0.00	446622.06	752262.06	N 32 13 33.60	W 103 39 4.44
	16600.00	90.25	179.66	12323.90	4432.90	-4437.98	-835.92	0.00	446522.06	752262.66	N 32 13 32.61	W 103 39 4.44
	16700.00	90.25	179.66	12323.47	4532.90	-4537.98	-835.32	0.00	446422.07	752263.26	N 32 13 31.62	W 103 39 4.44
	16800.00	90.25	179.66	12323.03	4632.90	-4637.98	-834.72	0.00	446322.08	752263.85	N 32 13 30.63	W 103 39 4.44
	16900.00	90.25	179.66	12322.60	4732.90	-4737.97	-834.12	0.00	446222.08	752264.45	N 32 13 29.64	W 103 39 4.44
NMNM0002889 - NMNM0033503 Crossing	16913.40	90.25	179.66	12322.54	4746.30	-4751.37	-834.04	0.00	446208.68	752264.53	N 32 13 29.51	W 103 39 4.44
	17000.00	90.25	179.66	12322.16	4832.89	-4837.97	-833.52	0.00	446122.09	752265.05	N 32 13 28.65	W 103 39 4.44
	17100.00	90.25	179.66	12321.73	4932.89	-4937.97	-832.93	0.00	446022.10	752265.65	N 32 13 27.66	W 103 39 4.44
	17200.00	90.25	179.66	12321.29	5032.89	-5037.97	-832.33	0.00	445922.10	752266.25	N 32 13 26.67	W 103 39 4.45
	17300.00	90.25	179.66	12320.86	5132.89	-5137.96	-831.73	0.00	445822.11	752266.85	N 32 13 25.68	W 103 39 4.45
	17400.00	90.25	179.66	12320.42	5232.89	-5237.96	-831.13	0.00	445722.12	752267.44	N 32 13 24.69	W 103 39 4.45
	17500.00	90.25	179.66	12319.99	5332.89	-5337.96	-830.53	0.00	445622.12	752268.04	N 32 13 23.70	W 103 39 4.45
	17600.00	90.25	179.66	12319.55	5432.89	-5437.95	-829.93	0.00	445522.13	752268.64	N 32 13 22.71	W 103 39 4.45
	17700.00	90.25	179.66	12319.12	5532.89	-5537.95	-829.33	0.00	445422.14	752269.24	N 32 13 21.73	W 103 39 4.45
	17800.00	90.25	179.66	12318.68	5632.89	-5637.95	-828.74	0.00	445322.15	752269.84	N 32 13 20.74	W 103 39 4.45
	17900.00	90.25	179.66	12318.25	5732.89	-5737.95	-828.14	0.00	445222.15	752270.44	N 32 13 19.75	W 103 39 4.45
	18000.00	90.25	179.66	12317.81	5832.89	-5837.94	-827.54	0.00	445122.16	752271.04	N 32 13 18.76	W 103 39 4.45
	18100.00	90.25	179.66	12317.38	5932.88	-5937.94	-826.94	0.00	445022.17	752271.63	N 32 13 17.77	W 103 39 4.45
	18200.00	90.25	179.66	12316.94	6032.88	-6037.94	-826.34	0.00	444922.17	752272.23	N 32 13 16.78	W 103 39 4.45
	18300.00	90.25	179.66	12316.51	6132.88	-6137.94	-825.74	0.00	444822.18	752272.83	N 32 13 15.79	W 103 39 4.45
	18400.00	90.25	179.66	12316.07	6232.88	-6237.93	-825.14	0.00	444722.19	752273.43	N 32 13 14.80	W 103 39 4.45
	18500.00	90.25	179.66	12315.64	6332.88	-6337.93	-824.55	0.00	444622.19	752274.03	N 32 13 13.81	W 103 39 4.45
	18600.00	90.25	179.66	12315.20	6432.88	-6437.93	-823.95	0.00	444522.20	752274.63	N 32 13 12.82	W 103 39 4.45
	18700.00	90.25	179.66	12314.76	6532.88	-6537.92	-823.35	0.00	444422.21	752275.23	N 32 13 11.83	W 103 39 4.45
	18800.00	90.25	179.66	12314.33	6632.88	-6637.92	-822.75	0.00	444322.21	752275.83	N 32 13 10.84	W 103 39 4.45
	18900.00	90.25	179.66	12313.89	6732.88	-6737.92	-822.15	0.00	444222.22	752276.42	N 32 13 9.85	W 103 39 4.45
	19000.00	90.25	179.66	12313.46	6832.88	-6837.92	-821.55	0.00	444122.23	752277.02	N 32 13 8.86	W 103 39 4.45
	19100.00	90.25	179.66	12313.02	6932.87	-6937.91	-820.95	0.00	444022.23	752277.62	N 32 13 7.87	W 103 39 4.45
	19200.00	90.25	179.66	12312.59	7032.87	-7037.91	-820.36	0.00	443922.24	752278.22	N 32 13 6.88	W 103 39 4.45
	19300.00	90.25	179.66	12312.15	7132.87	-7137.91	-819.76	0.00	443822.25	752278.82	N 32 13 5.89	W 103 39 4.45
	19400.00	90.25	179.66	12311.72	7232.87	-7237.91	-819.16	0.00	443722.26	752279.42	N 32 13 4.90	W 103 39 4.45
	19500.00	90.25	179.66	12311.28	7332.87	-7337.90	-818.56	0.00	443622.26	752280.01	N 32 13 3.91	W 103 39 4.45
	19600.00	90.25	179.66	12310.85	7432.87	-7437.90	-817.96	0.00	443522.27	752280.61	N 32 13 2.92	W 103 39 4.46
	19700.00	90.25	179.66	12310.41	7532.87	-7537.90	-817.36	0.00	443422.28	752281.21	N 32 13 1.94	W 103 39 4.46
	19800.00	90.25	179.66	12309.98	7632.87	-7637.89	-816.76	0.00	443322.28	752281.81	N 32 13 0.95	W 103 39 4.46
	19900.00	90.25	179.66	12309.54	7732.87	-7737.89	-816.17	0.00	443222.29	752282.41	N 32 12 59.96	W 103 39 4.46
	20000.00	90.25	179.66	12309.11	7832.87	-7837.89	-815.57	0.00	443122.30	752283.01	N 32 12 58.97	W 103 39 4.46
	20100.00	90.25	179.66	12308.67	7932.87	-7937.89	-814.97	0.00	443022.30	752283.61	N 32 12 57.98	W 103 39 4.46
	20200.00	90.25	179.66	12308.24	8032.86	-8037.88	-814.37	0.00	442922.31	752284.20	N 32 12 56.99	W 103 39 4.46
	20300.00	90.25	179.66	12307.80	8132.86	-8137.88	-813.77	0.00	442822.32	752284.80	N 32 12 56.00	W 103 39 4.46
	20400.00	90.25	179.66	12307.37	8232.86	-8237.88	-813.17	0.00	442722.32	752285.40	N 32 12 55.01	W 103 39 4.46
	20500.00	90.25	179.66	12306.93	8332.86	-8337.88	-812.57	0.00	442622.33	752286.00	N 32 12 54.02	W 103 39 4.46
	20600.00	90.25	179.66	12306.50	8432.86	-8437.87	-811.98	0.00	442522.34	752286.60	N 32 12 53.03	W 103 39 4.46
	20700.00	90.25	179.66	12306.06	8532.86	-8537.87	-811.38	0.00	442422.34	752287.20	N 32 12 52.04	W 103 39 4.46
	20800.00	90.25	179.66	12305.63	8632.86	-8637.87	-810.78	0.00	442322.35	752287.80	N 32 12 51.05	W 103 39 4.46
	20900.00	90.25	179.66	12305.19	8732.86	-8737.86	-810.18	0.00	442222.36	752288.39	N 32 12 50.06	W 103 39 4.46
	21000.00	90.25	179.66	12304.76	8832.86	-8837.86	-809.58	0.00	442122.37	752288.99	N 32 12 49.07	W 103 39 4.46
	21100.00	90.25	179.66	12304.32	8932.86	-8937.86	-808.98	0.00	442022.37	752289.59	N 32 12 48.08	W 103 39 4.46
	21200.00	90.25	179.66	12303.89	9032.85	-9037.86	-808.38	0.00	441922.38	752290.19	N 32 12 47.09	W 103 39 4.46
	21300.00	90.25	179.66	12303.45	9132.85	-9137.85	-807.79	0.00	441822.39	752290.79	N 32 12 46.10	W 103 39 4.46
	21400.00	90.25	179.66	12303.02	9232.85	-9237.85	-807.19	0.00	441722.39	752291.39	N 32 12 45.11	W 103 39 4.46
	21500.00	90.25	179.66	12302.58	9332.85	-9337.85	-806.59	0.00	441622.40	752291.99	N 32 12 44.12	W 103 39 4.46
	21600.00	90.25	179.66	12302.15	9432.85	-9437.85	-805.99	0.00	441522.41	752292.58	N 32 12 43.13	W 103 39 4.46
	21700.00	90.25	179.66	12301.71	9532.85	-9537.84	-805.39	0.00	441422.41	752293.18		

**Cimarex Dos Equis 11-14 Federal Com 25H Rev0 RM 05Sept19 Proposal
Geodetic Report
(Non-Def Plan)**



Report Date: September 05, 2019 - 04:13 PM
Client: Cimarex Energy
Field: NM Lea County (NAD 83)
Structure / Slot: Cimarex Dos Equis 11-14 Federal Com 25H / New Slot
Well: Dos Equis 11-14 Federal Com 25H
Borehole: Dos Equis 11-14 Federal Com 25H
UWI / API#: Unknown / Unknown
Survey Name: Cimarex Dos Equis 11-14 Federal Com 25H Rev0 RM 05Sept19
Survey Date: September 05, 2019
Tort / AHD / DDI / ERD Ratio: 107.465 ° / 10787.522 ft / 6.317 / 0.874
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 14' 16.47078", W 103° 38' 54.38252"
Location Grid N/E Y/X: N 450959.860 ftUS, E 753098.540 ftUS
CRS Grid Convergence Angle: 0.3654 °
Grid Scale Factor: 0.99996045
Version / Patch: 2.10.782.0

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 179.657 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3644.300 ft above MSL
Seabed / Ground Elevation: 3618.300 ft above MSL
Magnetic Declination: 6.671 °
Total Gravity Field Strength: 998.4358mgn (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 47890.245 nT
Magnetic Dip Angle: 59.898 °
Declination Date: September 05, 2019
Magnetic Declination Model: HDGM 2019
North Reference: Grid North
Grid Convergence Used: 0.3654 °
Total Corr Mag North->Grid North: 6.3053 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
SHL [545' FNL, 1706' FWL]	0.00	0.00	184.62	0.00	0.00	0.00	0.00	N/A	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
Nudge 2"/100' DLS	2300.00	0.00	269.55	2300.00	0.00	0.00	0.00	0.00	450959.86	753098.54	N 32 14 16.47	W 103 38 54.38
Hold Nudge	2730.39	8.61	269.55	2728.77	0.06	-0.25	-32.27	2.00	450959.61	753066.27	N 32 14 16.47	W 103 38 54.76
Drop to Vertical 2"/100' DLS	8061.67	8.61	269.55	8000.00	1.55	-6.52	-830.18	0.00	450953.34	752268.40	N 32 14 16.46	W 103 39 4.05
Hold Vertical	8492.06	0.00	269.55	8428.77	1.61	-6.77	-862.44	2.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
KOP - Build 12"/100' DLS	11893.30	0.00	269.55	11830.01	1.61	-6.77	-862.44	0.00	450953.09	752236.13	N 32 14 16.46	W 103 39 4.42
Build 4"/100' DLS	12518.30	75.00	179.66	12291.21	355.50	-360.66	-860.32	12.00	450599.22	752238.25	N 32 14 12.96	W 103 39 4.43
Landing Point Cimarex Dos Equis 11-14 Federal Com 25H - PBHL [100' FSL, 843' FWL]	12899.53	90.25	179.66	12340.00	732.46	-737.61	-858.07	4.00	450222.28	752240.51	N 32 14 9.23	W 103 39 4.43
Federal Com 25H - PBHL [100' FSL, 843' FWL]	22093.82	90.25	179.66	12300.00	9926.66	-9931.65	-803.03	0.00	441028.62	752295.54	N 32 12 38.25	W 103 39 4.47


Survey Type: Non-Def Plan

Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Expected Max Inclination (deg)	Survey Tool Type	Borehole / Survey
	1	0.000	26.000	1/100.000	30.000	30.000		NAL_MWD_IFR1+MS-Depth Only	Dos Equis 11-14 Federal Com 25H / Cimarex Dos Equis 11-14 Federal Com 25H Rev0 RM
	1	26.000	22093.816	1/100.000	30.000	30.000		NAL_MWD_IFR1+MS	Dos Equis 11-14 Federal Com 25H / Cimarex Dos Equis 11-14

Borehole: Dos Equis 11-14 Federal Com 25H	Well: Dos Equis 11-14 Federal Com 25H	Field: NM Lea County (NAD 83)	Structure: Cimarex Dos Equis 11-14 Federal Com 25H
---	---	---	--

Gravity & Magnetic Parameters		Surface Location NAD83 New Mexico State Plane, Eastern Zone, US Feet		Miscellaneous	
Model: HDGM 2019	Dip: 59.898°	Date: 05-Sep-2019	Lat: N 32 14 16.47	Northing: 459989.86FUS	Grid Conv: 0.3654*
MagDec: 6.671*	FS: 47890.245NT	Gravity FS: 998.436mgm (8.80665 Based)	Lon: W 103 38 54.38	Easting: 753098.54FUS	Scale Fact: 0.9996045
			Slot: New Slot		TVD Ref: RKB(3644.3ft above MSL)
			Plan: Cimarex Dos Equis 11-14 Federal Com 25H Rev0 RM 05Sept19		

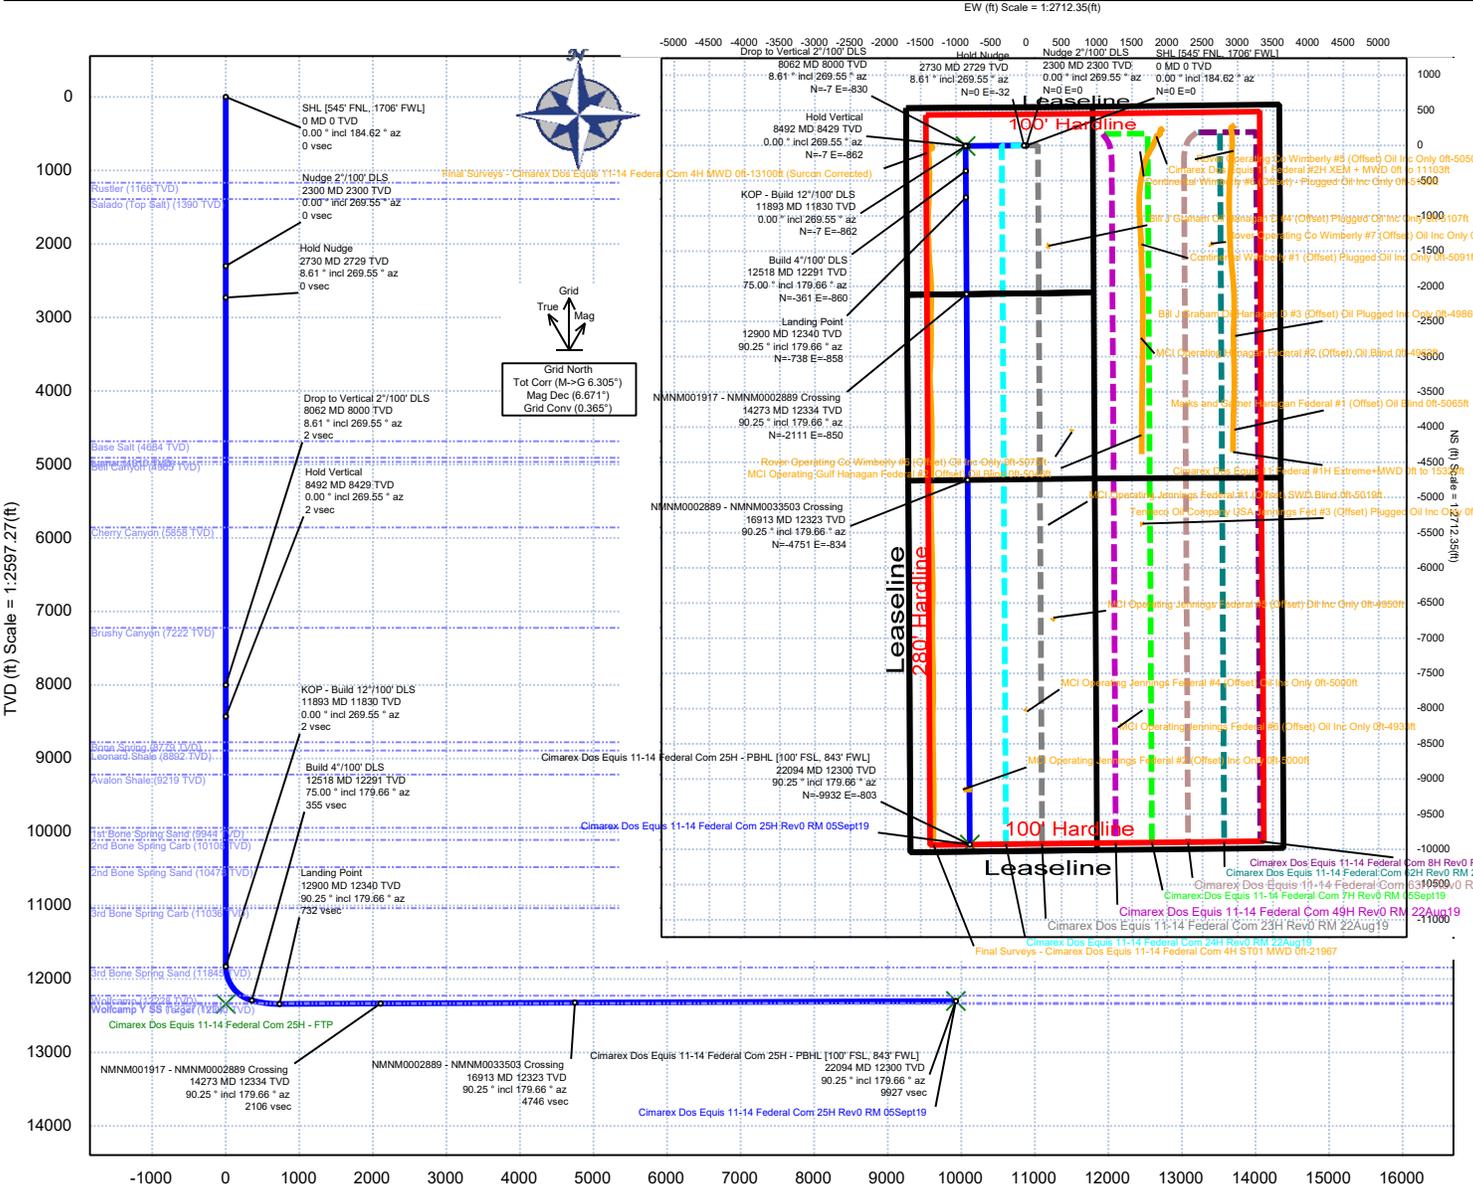

Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
SHL [545' FNL, 1708' FWL]	0.00	0.00	184.62	0.00	0.00	0.00	0.00	0.00
Rustler	1166.00	0.00	269.55	1166.00	0.00	0.00	0.00	0.00
Salado (Top Salt)	1390.00	0.00	269.55	1390.00	0.00	0.00	0.00	0.00
Nudge 27'100' DLS	2300.00	0.00	269.55	2300.00	0.00	0.00	0.00	0.00
Hold Nudge	2730.39	8.61	269.55	2728.77	0.06	-0.25	-32.27	2.00
Base Salt	4707.89	8.61	269.55	4684.00	0.61	-2.58	-328.23	0.00
Lamar	4936.47	8.61	269.55	4910.00	0.68	-2.85	-362.44	0.00
Bell Canyon	4992.09	8.61	269.55	4965.00	0.69	-2.91	-370.77	0.00
Cherry Canyon	5895.27	8.61	269.55	5858.00	0.94	-3.97	-505.94	0.00
Brushy Canyon	7274.81	8.61	269.55	7222.00	1.33	-5.60	-712.41	0.00
Drop to Vertical 27'100' DLS	8061.67	8.61	269.55	8000.00	1.55	-6.52	-830.18	0.00
Hold Vertical	8492.06	0.00	269.55	8428.77	1.61	-6.77	-862.44	2.00
Bone Spring	8942.29	0.00	269.55	8773.00	1.61	-6.77	-862.44	0.00
Leonard Shale	8955.29	0.00	269.55	8892.00	1.61	-6.77	-862.44	0.00
Avaton Shale	9282.29	0.00	269.55	9219.00	1.61	-6.77	-862.44	0.00
1st Bone Spring Sand	10007.29	0.00	269.55	9944.00	1.61	-6.77	-862.44	0.00
2nd Bone Spring Carb	10171.29	0.00	269.55	10108.00	1.61	-6.77	-862.44	0.00
3rd Bone Spring Carb	10541.29	0.00	269.55	10478.00	1.61	-6.77	-862.44	0.00
Wolfcamp	11099.29	0.00	269.55	11036.00	1.61	-6.77	-862.44	0.00
KOP - Build 127'100' DLS	11893.30	0.00	269.55	11830.01	1.61	-6.77	-862.44	0.00
3rd Bone Spring Sand	11908.29	1.80	179.66	11845.00	1.85	-7.01	-862.44	12.00
Wolfcamp	12363.84	56.46	179.66	12228.00	215.30	-220.46	-861.16	12.00
Build 47'100' DLS	12518.30	75.00	179.66	12291.21	355.50	-360.66	-860.32	12.00
Wolfcamp Y SS	12700.07	82.27	179.66	12327.00	533.59	-538.74	-859.26	4.00
Wolfcamp Y SS Target	12887.06	89.75	179.66	12340.00	719.99	-725.15	-858.14	4.00
Landing Point	12899.53	90.25	179.66	12340.00	732.46	-737.61	-858.07	4.00
Wolfcamp Y SS Target	12899.53	90.25	179.66	12340.00	732.46	-737.61	-858.07	4.00
NMNM001917 - NMNM0002889 Crossing	14272.70	90.25	179.66	12334.03	2105.62	-2110.75	-849.85	0.00
Wolfcamp Y SS	15887.67	90.25	179.66	12327.00	3720.58	-3725.68	-840.18	0.00
NMNM002889 - NMNM0033503 Crossing	16913.40	90.25	179.66	12322.54	4746.30	-4751.37	-834.04	0.00
Cimarex Dos Equis 11-14 Federal Com 25H - PBHL [100' FSL, 843' FWL]	22093.82	90.25	179.66	12300.00	9926.66	-9931.65	-803.03	0.00
Wolfcamp A1	N/A	N/A	N/A	12355.00				
Wolfcamp A2	N/A	N/A	N/A	12991.00				

Cimarex Dos Equis 11-14 Federal Com 25H Rev0 RM 05Sept19 Anti-Collision Summary Report

Analysis Date-24hr Time: September 05, 2019 - 16:14
Client: Cimarex Energy
Field: NM Lea County (NAD 83)
Structure: Cimarex Dos Equis 11-14 Federal Com 25H
Slot: New Slot
Well: Dos Equis 11-14 Federal Com 25H
Borehole: Dos Equis 11-14 Federal Com 25H
Scan MD Range: 0.00ft ~ 22093.82ft

Analysis Method: 3D Least Distance
Reference Trajectory: Cimarex Dos Equis 11-14 Federal Com 25H Rev0 RM 05Sept19 (Non-Def Plan)
Depth Interval: Every 10.00 Measured Depth (ft)
Rule Set: NAL Procedure: D&M AntiCollision Standard S002
Min Pts: All local minima indicated.
Version / Patch: 2.10.782.0
Database \ Project: US1153APP452.dir.slb.com/drilling-NM Lea County 2.10

Trajectory Error Model: ISCWSA0 3-D 95.000% Confidence 2.7955 sigma, for subject well. For offset wells, error model version is specified with each well respectively.

Offset Selection Criteria

Wellhead distance scan: Not performed!
 Definitive Surveys - Definitive Plans - Definitive surveys exclude definitive plans
 Selection filters:

Offset Trajectories Summary

- All Non-Def Surveys when no Def-Survey is set in a borehole - All Non-Def Plans when no Def-Plan is set in a borehole

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		

Results highlighted: Sep-Factor separation <= 1.50 ft

Cimarex Dos Equis 11-14 Federal Com 24H Rev0 RM 22Aug19 (Def Plan)												
20.00	16.50	17.50	3.50	N/A	MAS = 5.03 (m)	0.00	0.00	CtCt<=15m<15.00				Fail Minor
20.00	16.50	17.50	3.50	N/A	MAS = 5.03 (m)	26.00	26.00					Enter Alert
20.00	20.00	5.83	0.00	1.50	OSF1.50	1920.00	1920.00		OSF<1.50			WRP
20.02	23.59	3.44	-3.59	1.24	OSF1.50	2300.00	2300.00					Enter Minor
20.02	23.66	3.41	-3.64	1.24	OSF1.50	2310.00	2310.00					MinPt-CtCt
20.07	23.73	3.42	-3.66	1.24	OSF1.50	2320.00	2320.00					MINPT-O-EOU
24.47	24.60	7.24	-0.13	1.49	OSF1.50	2460.00	2459.92					MinPts
87.89	28.19	68.26	59.70	4.99	OSF1.50	3710.00	3697.35	OSF>5.00	OSF>1.50			Exit Minor
512.92	81.67	457.64	431.25	9.67	OSF1.50	11900.00	11836.71					Exit Alert
512.91	77.27	460.57	435.65	10.24	OSF1.50	12620.00	12314.02					MinPts
512.92	155.66	408.31	357.26	5.00	OSF1.50	16890.00	12322.64	OSF<5.00				Enter Alert
512.93	314.14	302.67	198.88	2.43	OSF1.50	22090.00	12300.02					MinPts
512.93	314.06	302.73	198.88	2.46	OSF1.50	22093.82	12300.00					TD

Cimarex Dos Equis 11-14 Federal Com 23H Rev0 RM 22Aug19 (Def Plan)												
40.00	32.50	37.50	7.50	N/A	MAS = 9.91 (m)	0.00	0.00	CtCt<=15m<15.00				Warning Alert
40.00	32.50	37.50	7.50	N/A	MAS = 9.91 (m)	26.00	26.00					Enter Alert
40.00	32.50	23.45	7.50	2.67	MAS = 9.91 (m)	2300.00	2300.00					WRP
40.02	32.50	23.42	7.52	2.66	MAS = 9.91 (m)	2310.00	2310.00					MinPts
40.28	32.50	23.54	7.78	2.65	MAS = 9.91 (m)	2340.00	2340.00					MINPT-O-EOU
81.19	32.50	62.75	48.69	4.94	MAS = 9.91 (m)	2790.00	2787.71	OSF>5.00				MinPt-O-SF
993.59	64.51	949.75	929.08	23.97	OSF1.50	8061.67	8000.00					Exit Alert
1025.85	90.33	964.80	935.52	17.43	OSF1.50	11900.00	11836.71					MinPt-O-SF
1025.85	85.18	968.24	940.68	18.57	OSF1.50	12760.00	12333.82					MinPts
1025.86	309.62	818.62	716.25	5.00	OSF1.50	21990.00	12300.45	OSF<5.00				MinPt-CtCt
1025.87	312.64	816.57	713.17	4.93	OSF1.50	22090.00	12300.02					Enter Alert
1025.88	312.69	816.58	713.18	4.95	OSF1.50	22093.82	12300.00					MinPts
												TD

Final Surveys - Cimarex Dos Equis 11-14 Federal Com 4H ST01 MWD Off-21967 (Def Survey)												
1335.57	32.81	1333.87	1302.76	N/A	MAS = 10.00 (m)	0.00	0.00					Warning Alert
1335.59	32.81	1333.87	1302.78	47111.23	MAS = 10.00 (m)	26.00	26.00					MinPts
1335.70	32.81	1333.84	1302.89	8583.21	MAS = 10.00 (m)	70.00	70.00					WRP
1335.85	32.81	1333.85	1303.05	4558.20	MAS = 10.00 (m)	110.00	110.00					MINPT-O-EOU
510.38	46.39	478.53	463.98	17.43	OSF1.50	8290.00	8226.88					MINPT-O-EOU
505.33	45.62	474.00	459.71	17.59	OSF1.50	8450.00	8386.72					MinPt-O-SF
505.32	45.58	474.02	459.74	17.60	OSF1.50	8460.00	8396.71					MinPts
519.03	52.95	482.83	466.09	15.42	OSF1.50	10870.00	10806.71					MinPt-CtCt
519.09	53.12	482.77	465.97	15.37	OSF1.50	10910.00	10846.71					MINPT-O-EOU
519.17	53.21	482.79	465.96	15.35	OSF1.50	10930.00	10866.71					MinPt-O-ADP
535.93	57.43	496.75	478.49	14.61	OSF1.50	11893.30	11830.01					MinPt-O-SF
533.23	56.85	494.44	476.37	14.63	OSF1.50	12030.00	11964.85					MinPt-O-SF
515.03	56.40	476.59	458.70	14.32	OSF1.50	12630.00	12315.88					MinPt-O-SF
515.11	56.44	476.58	458.67	14.31	OSF1.50	12640.00	12317.68					MinPts
498.36	76.86	446.24	421.50	10.02	OSF1.50	14230.00	12334.21					MinPt-CtCt
498.71	77.66	445.91	420.83	9.89	OSF1.50	14270.00	12334.04					MINPT-O-EOU
499.13	78.35	446.01	420.77	9.84	OSF1.50	14290.00	12333.95					MinPt-O-ADP
506.89	87.85	447.45	419.04	8.87	OSF1.50	14710.00	12332.12					MinPt-CtCt
507.00	91.53	445.11	415.47	8.51	OSF1.50	14860.00	12331.47					MinPt-CtCt
508.37	95.78	443.64	412.58	8.14	OSF1.50	15030.00	12330.73					MINPT-O-EOU
510.44	98.28	444.05	412.16	7.96	OSF1.50	15130.00	12330.30					MinPt-O-ADP
503.33	124.31	419.64	379.07	6.17	OSF1.50	16150.00	12325.86					MinPt-CtCt
505.57	130.77	417.51	374.80	5.89	OSF1.50	16380.00	12324.86					MINPT-O-EOU
506.80	132.23	417.77	374.57	5.83	OSF1.50	16430.00	12324.64					MinPt-O-ADP
513.49	141.00	418.62	372.49	5.54	OSF1.50	16750.00	12323.25					MINPT-O-EOU
514.50	142.20	418.83	372.30	5.50	OSF1.50	16790.00	12323.07					MinPt-O-ADP
521.51	154.31	417.78	367.21	5.13	OSF1.50	17230.00	12321.16					MinPt-CtCt
521.79	158.55	415.23	363.24	4.99	OSF1.50	17380.00	12320.51	OSF<5.00				Enter Alert
521.77	159.42	414.62	362.34	4.97	OSF1.50	17410.00	12320.38					MinPt-CtCt
502.78	185.48	378.26	317.31	4.10	OSF1.50	18320.00	12316.42					MinPt-CtCt
502.77	189.14	375.80	313.63	4.02	OSF1.50	18450.00	12315.85					MinPt-CtCt
503.61	191.60	375.00	312.01	3.98	OSF1.50	18530.00	12315.50					MINPT-O-EOU
505.39	193.63	375.43	311.76	3.95	OSF1.50	18600.00	12315.20					MinPt-O-ADP
509.19	197.54	376.62	311.65	3.90	OSF1.50	18740.00	12314.59					MINPT-O-EOU
506.37	221.55	357.80	284.82	3.45	OSF1.50	19570.00	12310.98					MinPt-CtCt
505.45	229.26	351.74	276.19	3.33	OSF1.50	19840.00	12309.81					MinPt-CtCt
506.62	232.95	350.45	273.68	3.28	OSF1.50	19960.00	12309.28					MINPT-O-EOU
511.94	239.11	351.66	272.83	3.23	OSF1.50	20170.00	12308.37					MinPt-O-ADP

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
515.72	244.08	352.14	271.64	3.19	OSF1.50	20350.00	12307.59				MinPt-CtCt		
510.30	266.78	331.58	243.52	2.88	OSF1.50	21130.00	12304.19				MinPt-CtCt		
509.71	272.66	327.07	237.06	2.82	OSF1.50	21330.00	12303.32				MinPt-CtCt		
509.72	278.21	323.38	231.52	2.76	OSF1.50	21520.00	12302.50				MinPt-CtCt		
510.63	281.38	322.17	229.25	2.73	OSF1.50	21620.00	12302.06				MINPT-O-EOU		
511.40	282.32	322.32	229.08	2.73	OSF1.50	21650.00	12301.93				MinPt-O-ADP		
517.92	294.99	320.39	222.93	2.64	OSF1.50	22093.82	12300.00				MinPts		

MCI Operating Hanagan Federal #2 (Offset) Oil Blind Off-4962ft (Def Survey)

Warning Alert

3181.46	32.81	3178.96	3148.65	N/A	MAS = 10.00 (m)	0.00	0.00				Surface	
3181.40	32.81	3178.23	3148.59	4741.10	MAS = 10.00 (m)	26.00	26.00				WRP	
3181.40	703.91	2711.29	2477.49	6.80	OSF1.50	2300.00	2300.00				MinPt-CtCt	
3231.22	972.16	2582.28	2259.06	4.99	OSF1.50	3160.00	3153.54			OSF<5.00	Enter Alert	
3385.27	1546.77	2353.26	1838.50	3.29	OSF1.50	5010.00	4982.71				MinPts	
4305.77	1295.73	3441.11	3010.03	4.99	OSF1.50	7390.00	7335.90			OSF<5.00	Exit Alert	
7754.58	498.38	7421.47	7256.18	23.45	OSF1.50	14940.00	12331.12				MinPt-CtCt	
7754.65	498.68	7421.40	7256.02	23.44	OSF1.50	14980.00	12330.95				MINPT-O-EOU	
7755.05	499.10	7421.46	7255.93	23.42	OSF1.50	15030.00	12330.73				MinPt-O-ADP	
10358.32	1106.09	9620.10	9252.24	14.03	OSF1.50	21810.00	12301.23				MinPt-O-SF	
10548.63	1125.64	9797.37	9422.99	14.08	OSF1.50	22093.82	12300.00				TD	

MCI Operating Gulf Hanagan Federal #2 (Offset) Oil Blind Off-5046ft (Def Survey)

Warning Alert

4427.22	32.81	4424.72	4394.41	N/A	MAS = 10.00 (m)	0.00	0.00				Surface	
4427.19	32.81	4424.68	4394.38	N/A	MAS = 10.00 (m)	10.00	10.00				MinPt-O-SF	
4427.17	32.81	4424.07	4394.37	7281.75	MAS = 10.00 (m)	26.00	26.00				WRP	
4427.17	703.72	3957.19	3723.45	9.46	OSF1.50	2300.00	2300.00				MinPt-CtCt	
4538.11	1363.56	3628.24	3174.55	5.00	OSF1.50	4420.00	4399.35			OSF<5.00	Enter Alert	
4581.35	1573.18	3531.73	3008.17	4.37	OSF1.50	5100.00	5071.69				MinPts	
4955.46	1489.52	3961.61	3465.94	5.00	OSF1.50	6710.00	6663.56			OSF<5.00	Exit Alert	
7668.17	516.01	7323.33	7152.16	22.39	OSF1.50	16320.00	12325.12				MinPt-CtCt	
7668.32	516.40	7323.22	7151.92	22.38	OSF1.50	16370.00	12324.90				MINPT-O-EOU	
7668.92	517.10	7323.35	7151.81	22.35	OSF1.50	16430.00	12324.64				MinPt-O-ADP	
9596.97	1048.44	8897.18	8548.53	13.73	OSF1.50	22093.82	12300.00				MinPt-O-SF	

Marks and Garner Hanagan Federal #1 (Offset) Oil Blind Off-5065ft (Def Survey)

Warning Alert

5003.65	32.81	5001.15	4970.84	N/A	MAS = 10.00 (m)	0.00	0.00				Surface	
5003.62	32.81	5000.23	4970.81	5616.04	MAS = 10.00 (m)	26.00	26.00				WRP	
5003.62	704.57	4533.07	4299.05	10.69	OSF1.50	2300.00	2300.00				MinPt-CtCt	
5239.05	1575.75	4187.71	3663.30	4.99	OSF1.50	5100.00	5071.69			OSF<5.00	Enter Alert	
5239.99	1578.86	4186.59	3661.13	4.98	OSF1.50	5110.00	5081.58				MinPts	
5240.95	1579.15	4187.35	3661.80	4.98	OSF1.50	5120.00	5091.47				MinPt-O-SF	
5255.06	1578.62	4201.81	3676.44	5.00	OSF1.50	5250.00	5220.00			OSF<5.00	Exit Alert	
8175.90	738.42	7682.79	7437.48	16.66	OSF1.50	16250.00	12325.42				MinPt-CtCt	
8175.94	738.58	7682.74	7437.39	16.66	OSF1.50	16280.00	12325.29				MINPT-O-EOU	
8176.03	738.66	7682.76	7437.37	16.65	OSF1.50	16300.00	12325.21				MinPt-O-ADP	
10047.07	1112.02	9304.89	8935.05	13.53	OSF1.50	22093.82	12300.00				MinPt-O-SF	

Final Surveys - Cimarex Dos Equis 11-14 Federal Com 4H MWD Off-13100ft (Surcon Connected) (Def Survey)

Pass

1335.57	32.81	1333.87	1302.76	N/A	MAS = 10.00 (m)	0.00	0.00				MinPts	
1335.59	32.81	1333.87	1302.78	47111.23	MAS = 10.00 (m)	26.00	26.00				WRP	
1335.70	32.81	1333.84	1302.89	8583.21	MAS = 10.00 (m)	70.00	70.00				MINPT-O-EOU	
1335.85	32.81	1333.86	1303.05	4558.20	MAS = 10.00 (m)	110.00	110.00				MINPT-O-EOU	
510.38	46.39	478.53	463.98	17.43	OSF1.50	8290.00	8226.88				MinPt-O-SF	
505.33	45.62	474.00	459.71	17.59	OSF1.50	8450.00	8386.72				MinPts	
505.32	45.58	474.02	459.74	17.60	OSF1.50	8460.00	8396.71				MinPt-CtCt	
519.03	52.95	482.83	466.09	15.42	OSF1.50	10870.00	10806.71				MinPt-CtCt	
519.09	53.14	482.77	465.97	15.37	OSF1.50	10910.00	10846.71				MINPT-O-EOU	
519.17	53.21	482.79	465.96	15.35	OSF1.50	10930.00	10866.71				MinPt-O-ADP	
536.19	57.47	496.99	478.72	14.60	OSF1.50	11893.30	11830.01				MinPt-O-SF	
536.55	56.77	497.81	479.78	14.80	OSF1.50	12060.00	11993.35				MinPt-O-ADP	
536.51	56.73	497.80	479.78	14.82	OSF1.50	12070.00	12002.71				MINPT-O-EOU	
536.49	56.68	497.81	479.81	14.83	OSF1.50	12080.00	12011.99				MinPt-CtCt	
9864.23	64.37	9820.79	9799.85	235.55	OSF1.50	22093.82	12300.00				TD	

Cimarex Dos Equis 11-14 Federal Com 49H Rev0 RM 22Aug19 (Non-Def Plan)

Pass

1095.84	32.81	1093.34	1063.03	N/A	MAS = 10.00 (m)	0.00	0.00				Surface	
1095.79	32.81	1093.29	1062.98	N/A	MAS = 10.00 (m)	10.00	10.00				MinPts	
1095.79	32.81	1093.29	1062.98	N/A	MAS = 10.00 (m)	26.00	26.00				WRP	
1095.79	32.81	1079.27	1062.98	77.95	MAS = 10.00 (m)	2300.00	2300.00				MinPts	
1095.81	32.81	1079.24	1063.00	77.69	MAS = 10.00 (m)	2310.00	2310.00				MINPT-O-EOU	
1926.67	71.50	1878.17	1855.17	41.83	OSF1.50	8100.00	8037.94				MinPt-O-SF	
1953.37	97.63	1887.45	1855.74	30.76	OSF1.50	11860.00	11796.71				MinPts	
1953.61	97.69	1887.64	1855.91	30.74	OSF1.50	11893.30	11830.01				MinPt-O-SF	
2072.54	92.10	2010.31	1980.44	34.66	OSF1.50	12850.00	12339.36				MINPT-O-EOU	
2072.54	92.09	2010.31	1980.45	34.66	OSF1.50	12899.53	12340.00				MinPt-CtCt	
2072.58	314.94	1861.79	1757.64	9.94	OSF1.50	22093.82	12300.00				MinPts	

Cimarex Dos Equis 11-14 Federal Com 7H Rev0 RM 05Sept19 (Non-Def Plan)

Pass

1115.66	32.81	1113.16	1082.85	N/A	MAS = 10.00 (m)	0.00	0.00				Surface	
1115.61	32.81	1113.11	1082.80	N/A	MAS = 10.00 (m)	10.00	10.00				MinPts	
1115.61	32.81	1113.11	1082.80	N/A	MAS = 10.00 (m)	26.00	26.00				WRP	
1115.61	32.81	1099.08	1082.80	79.37	MAS = 10.00 (m)	2300.00	2300.00				MinPts	
1115.63	32.81	1099.05	1082.82	79.10	MAS = 10.00 (m)	2310.00	2310.00				MINPT-O-EOU	
1128.63	32.81	1111.17	1095.82	75.29	MAS = 10.00 (m)	2570.00	2569.60				MinPt-O-SF	
2531.03	60.20	2490.07	2470.84	65.74	OSF1.50	7890.00	7830.27				MinPt-O-SF	
2558.22	60.80	2516.85	2497.42	65.76	OSF1.50	8061.67	8000.00				MinPt-O-SF	
2590.43	79.73	2536.44	2510.70	50.28	OSF1.50	11900.00	11836.71				MinPts	
2585.47	76.38	2533.72	2509.09	52.44	OSF1.50	12899.53	12340.00				MinPt-CtCt	
2585.51	318.46	2372.33	2267.06	12.26	OSF1.50	22093.82	12300.00				MinPts	

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
Bill J Graham Oil Hanagan D #4 (Offset) Plugged Oil Inc Only Off: 5107ft (Def Survey)													
	1451.48	32.81	1448.98	1418.68	N/A	MAS = 10.00 (m)	0.00	0.00					Pass
	1451.43	32.81	1448.86	1418.62	10933.27	MAS = 10.00 (m)	20.00	20.00					Surface
	1451.43	32.81	1448.70	1418.62	6127.43	MAS = 10.00 (m)	26.00	26.00					MinPts
	1450.43	63.23	1407.44	1387.20	35.76	OSF1.50	1220.00	1220.00					WRP
	1451.92	123.00	1369.09	1328.92	18.04	OSF1.50	2330.00	2330.00					MinPt-CtCt
	1457.29	136.60	1365.33	1320.69	16.27	OSF1.50	2580.00	2579.55					MINPT-O-EOU
	1462.69	143.10	1366.46	1319.58	15.58	OSF1.50	2700.00	2698.70					MinPt-CtCt
	1488.10	165.49	1376.94	1322.61	13.67	OSF1.50	3100.00	3094.22					MinPt-O-ADP
	1517.27	204.00	1380.44	1313.27	11.28	OSF1.50	3880.00	3865.43					MINPT-O-EOU
	1530.81	219.85	1383.41	1310.96	10.55	OSF1.50	4210.00	4191.72					MinPt-O-ADP
	1580.07	260.87	1405.33	1319.20	9.16	OSF1.50	4820.00	4794.85					MINPT-O-EOU
	1582.05	266.25	1403.71	1315.79	8.98	OSF1.50	4980.00	4953.04					MINPT-O-EOU
	1583.08	267.49	1403.93	1315.60	8.95	OSF1.50	5020.00	4992.59					MinPt-O-ADP
	1589.48	271.18	1407.86	1318.30	8.86	OSF1.50	5150.00	5121.13					MinPt-O-SF
	7313.74	62.06	7271.53	7251.68	184.13	OSF1.50	13630.00	12336.82					MinPt-CtCt
	7314.02	62.81	7271.31	7251.21	181.84	OSF1.50	13690.00	12336.56					MINPT-O-EOU
	7314.48	63.37	7271.40	7251.11	180.18	OSF1.50	13730.00	12336.39					MinPt-O-ADP
	9935.02	232.35	9779.29	9702.67	64.82	OSF1.50	20350.00	12307.59					MinPt-O-SF
	11189.14	255.30	11018.11	10933.84	66.38	OSF1.50	22093.82	12300.00					TD
Continental Wimberly #6 (Offset) - Plugged Oil Inc Only Off:5100ft (Def Survey)													
	1616.46	32.81	1613.96	1583.66	N/A	MAS = 10.00 (m)	0.00	0.00					Pass
	1615.49	32.81	1612.86	1582.68	12109.54	MAS = 10.00 (m)	26.00	26.00					Surface
	1614.80	32.81	1612.13	1581.99	9814.64	MAS = 10.00 (m)	80.00	80.00					MinPt-O-SF
	1614.52	38.08	1588.30	1576.44	67.97	OSF1.50	870.00	870.00					MinPts
	1610.82	110.93	1536.03	1499.89	22.25	OSF1.50	2260.00	2260.00					MinPt-CtCt
	1612.08	115.91	1533.98	1496.18	21.29	OSF1.50	2370.00	2369.99					MINPT-O-EOU
	1613.22	117.26	1534.22	1495.96	21.05	OSF1.50	2400.00	2399.98					MinPt-O-ADP
	2028.99	261.31	1853.96	1767.69	11.75	OSF1.50	5270.00	5239.78					MinPt-O-SF
	10306.17	220.86	10158.10	10085.31	70.78	OSF1.50	19270.00	12312.29					MinPt-O-SF
	12393.38	252.42	12224.27	12140.96	74.37	OSF1.50	22093.82	12300.00					TD
Cimarex Dos Equis 11 Federal #2H XEM + MWD Off to 11103ft (Def Survey)													
	1965.16	32.81	1962.66	1932.35	N/A	MAS = 10.00 (m)	0.00	0.00					Pass
	1965.10	32.81	1962.60	1932.29	350605.70	MAS = 10.00 (m)	10.00	10.00					Surface
	1965.09	32.81	1962.59	1932.28	N/A	MAS = 10.00 (m)	26.00	26.00					MinPt-O-SF
	1962.57	32.81	1954.95	1929.76	382.82	MAS = 10.00 (m)	1210.00	1210.00					WRP
	1955.05	32.81	1942.51	1922.24	194.55	MAS = 10.00 (m)	2330.00	2330.00					MinPts
	1955.05	32.81	1942.49	1922.25	194.09	MAS = 10.00 (m)	2340.00	2340.00					MINPT-O-EOU
	1957.02	32.81	1944.30	1924.21	191.33	MAS = 10.00 (m)	2440.00	2439.94					MinPt-O-SF
	1960.49	32.81	1947.77	1927.69	191.51	MAS = 10.00 (m)	2510.00	2509.81					MinPt-O-SF
	1962.52	32.81	1949.78	1929.71	191.51	MAS = 10.00 (m)	2540.00	2539.72					MinPt-O-SF
	2725.23	47.23	2692.92	2678.01	91.31	OSF1.50	8061.67	8000.00					MinPt-O-SF
	2730.23	47.29	2697.87	2682.94	91.38	OSF1.50	8100.00	8037.94					MinPt-O-SF
	2731.08	48.18	2698.10	2682.87	89.60	OSF1.50	9370.00	9306.71					MinPt-CtCt
	2711.41	55.47	2673.60	2655.95	76.72	OSF1.50	11180.00	11116.71					MinPts
	2711.43	55.49	2673.60	2655.94	76.68	OSF1.50	11190.00	11126.71					MinPt-O-ADP
	2720.33	55.93	2682.21	2664.40	76.30	OSF1.50	11400.00	11336.71					MinPt-O-SF
	10469.75	66.55	10424.55	10403.20	245.13	OSF1.50	22093.82	12300.00					TD
Cimarex Dos Equis 11 Federal #2H ST01 Xem+MWD 10343ft to 15244ft (Def Survey)													
	1965.16	32.81	1962.66	1932.35	N/A	MAS = 10.00 (m)	0.00	0.00					Pass
	1965.10	32.81	1962.60	1932.29	350605.70	MAS = 10.00 (m)	10.00	10.00					Surface
	1965.09	32.81	1962.59	1932.28	N/A	MAS = 10.00 (m)	26.00	26.00					MinPt-O-SF
	1962.57	32.81	1954.95	1929.76	382.82	MAS = 10.00 (m)	1210.00	1210.00					WRP
	1955.05	32.81	1942.51	1922.24	194.55	MAS = 10.00 (m)	2330.00	2330.00					MinPts
	1955.05	32.81	1942.49	1922.25	194.09	MAS = 10.00 (m)	2340.00	2340.00					MINPT-O-EOU
	1957.02	32.81	1944.30	1924.21	191.33	MAS = 10.00 (m)	2440.00	2439.94					MinPt-O-SF
	1960.49	32.81	1947.77	1927.69	191.51	MAS = 10.00 (m)	2510.00	2509.81					MinPt-O-SF
	1962.52	32.81	1949.78	1929.71	191.51	MAS = 10.00 (m)	2540.00	2539.72					MinPt-O-SF
	2725.23	47.23	2692.92	2678.01	91.31	OSF1.50	8061.67	8000.00					MinPt-O-SF
	2730.23	47.29	2697.87	2682.94	91.38	OSF1.50	8100.00	8037.94					MinPt-O-SF
	2731.08	48.18	2698.10	2682.87	89.60	OSF1.50	9370.00	9306.71					MinPt-CtCt
	2531.58	64.83	2487.52	2466.74	60.87	OSF1.50	10980.00	10916.71					MinPts
	2534.83	65.05	2490.62	2469.77	60.72	OSF1.50	11110.00	11046.71					MinPt-O-SF
	2838.02	66.78	2792.66	2771.23	66.17	OSF1.50	13020.00	12339.48					MinPt-CtCt
	2838.19	67.21	2792.50	2770.91	65.67	OSF1.50	13060.00	12339.30					MINPT-O-EOU
	2838.39	67.52	2792.54	2770.87	65.42	OSF1.50	13080.00	12339.21					MinPt-O-ADP
	2839.22	68.24	2792.90	2770.98	64.73	OSF1.50	13130.00	12339.00					MinPt-O-ADP
	2862.28	94.58	2798.39	2767.70	46.59	OSF1.50	13740.00	12336.34					MinPt-CtCt
	2864.21	100.74	2796.22	2763.47	43.69	OSF1.50	13940.00	12335.47					MINPT-O-EOU
	2873.63	135.90	2782.21	2737.75	32.28	OSF1.50	14650.00	12332.38					MinPt-CtCt
	2849.56	268.66	2669.62	2580.90	16.05	OSF1.50	16560.00	12324.08					MinPt-O-SF
	2849.55	268.66	2669.61	2580.89	16.05	OSF1.50	16570.00	12324.03					MinPts
	6217.83	141.35	6122.76	6076.48	67.14	OSF1.50	22093.82	12300.00					TD
Continental Wimberly #1 (Offset) Plugged Oil Inc Only Off: 5091ft (Def Survey)													
	2143.83	32.81	2141.33	2111.02	N/A	MAS = 10.00 (m)	0.00	0.00					Pass
	2143.80	32.81	2141.30	2110.99	N/A	MAS = 10.00 (m)	10.00	10.00					Surface
	2143.80	32.81	2141.05	2110.99	8653.82	MAS = 10.00 (m)	26.00	26.00					MinPts
	2135.77	115.56	2057.89	2020.21	28.30	OSF1.50	2200.00	2200.00					WRP
	2137.51	123.81	2054.13	2013.70	26.40	OSF1.50	2380.00	2379.99					MinPt-CtCt
	2139.02	125.60	2054.45	2013.41	26.03	OSF1.50	2420.00	2419.96					MINPT-O-EOU
	2462.23	266.32	2283.85	2195.91	13.99	OSF1.50	5130.00	5101.35					MinPt-O-SF
	7651.80	95.63	7587.21	7556.17	123.21	OSF1.50	13610.00	12336.91					MinPt-CtCt
	7651.89	95.88	7587.13	7556.00	122.86	OSF1.50	13650.00	12336.74					MINPT-O-EOU
	7652.01	96.03	7587.16	7555.99	122.68	OSF1.50	13670.00	12336.65					MinPt-CtCt
	10149.23	230.33	9994.84	9918.89	66.82	OSF1.50	20280.00	12307.89					MinPt-O-ADP
	11422.97	252.97	11253.49	11170.00	68.39	OSF1.50	22093.82	12300.00					TD

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
Cimarex Dos Equis 11-14 Federal Com 63H Rev0 RM 26Aug19 (Def Plan)													
2424.43	32.81	2421.93	2391.62	N/A		MAS = 10.00 (m)	0.00	0.00					Surface
2424.38	32.81	2421.88	2391.57	611411.09		MAS = 10.00 (m)	10.00	10.00					MinPt-O-SF
2424.38	32.81	2421.88	2391.57	N/A		MAS = 10.00 (m)	26.00	26.00					WRP
2424.38	32.81	2407.87	2391.57		172.88	MAS = 10.00 (m)	2300.00	2300.00					MinPts
2424.39	32.81	2407.84	2391.58		172.30	MAS = 10.00 (m)	2310.00	2310.00					MINPT-O-EOU
3258.59	71.49	3210.10	3187.10	70.83		OSF1.50	8100.00	8037.94					MinPt-O-SF
3270.48	71.71	3221.85	3198.78	70.83		OSF1.50	8200.00	8137.22					MinPt-O-SF
3285.34	92.78	3222.67	3192.59	54.58		OSF1.50	11250.00	11186.71					MinPts
3108.34	94.26	3044.67	3014.08	50.77		OSF1.50	12160.00	12083.06					MinPt-O-SF
3099.01	93.59	3035.79	3005.43	50.99		OSF1.50	12410.00	12251.60					MinPt-O-ADP
3098.85	93.39	3035.76	3005.46	51.10		OSF1.50	12450.00	12268.88					MINPT-O-EOU
3098.44	92.31	3036.07	3006.14	51.71		OSF1.50	12820.00	12338.14					MINPT-O-EOU
3098.42	92.28	3036.07	3006.15	51.73		OSF1.50	12899.53	12340.00					MinPt-CtCt
3098.48	314.74	2887.82	2783.74	14.87		OSF1.50	22093.82	12300.00					MinPts
Cimarex Dos Equis 11-14 Federal Com 62H Rev0 RM 23Aug19 (Def Plan)													
2444.38	32.81	2441.88	2411.57	N/A		MAS = 10.00 (m)	0.00	0.00					Surface
2444.33	32.81	2441.83	2411.52	633030.09		MAS = 10.00 (m)	10.00	10.00					MinPt-O-SF
2444.33	32.81	2441.83	2411.52	N/A		MAS = 10.00 (m)	26.00	26.00					WRP
2444.33	32.81	2427.82	2411.52		174.30	MAS = 10.00 (m)	2300.00	2300.00					MinPts
2444.34	32.81	2427.79	2411.54		173.71	MAS = 10.00 (m)	2310.00	2310.00					MINPT-O-EOU
2506.73	32.81	2488.33	2473.93	157.48		MAS = 10.00 (m)	2910.00	2906.36					MinPt-O-SF
3285.38	43.40	3255.62	3241.98	120.40		OSF1.50	6070.00	6030.77					MinPt-O-SF
3588.72	59.78	3548.04	3528.95	93.92		OSF1.50	8100.00	8037.94					MinPt-O-SF
3615.48	83.17	3559.20	3532.31	67.18		OSF1.50	11900.00	11836.71					MinPts
3615.49	83.18	3559.20	3532.31	67.17		OSF1.50	11910.00	11846.71					MinPt-O-SF
3611.87	79.00	3558.37	3532.87	70.77		OSF1.50	12400.00	12264.85					MinPt-O-ADP
3611.71	78.80	3558.35	3532.92	70.96		OSF1.50	12490.00	12283.08					MINPT-O-EOU
3611.67	78.73	3558.35	3532.94	71.01		OSF1.50	12510.00	12288.99					MINPT-O-EOU
3611.48	78.47	3558.34	3533.01	71.26		OSF1.50	12640.00	12317.68					MinPt-O-ADP
3611.34	78.66	3558.07	3532.68	71.08		OSF1.50	12899.53	12340.00					MinPt-CtCt
3611.40	316.22	3399.76	3295.18	17.28		OSF1.50	22093.82	12300.00					MinPts
Cimarex Dos Equis 11-14 Federal Com 8H Rev0 RM 22Aug19 (Def Plan)													
2464.33	32.81	2461.83	2431.52	N/A		MAS = 10.00 (m)	0.00	0.00					Surface
2464.29	32.81	2461.79	2431.48	709070.96		MAS = 10.00 (m)	10.00	10.00					MinPt-O-SF
2464.29	32.81	2461.79	2431.48	N/A		MAS = 10.00 (m)	26.00	26.00					WRP
2464.29	32.81	2447.78	2431.48		175.70	MAS = 10.00 (m)	2300.00	2300.00					MinPts
2464.31	32.81	2447.75	2431.50		175.11	MAS = 10.00 (m)	2310.00	2310.00					MINPT-O-EOU
2495.25	32.81	2477.65	2462.44	165.06		MAS = 10.00 (m)	2700.00	2698.70					MinPt-O-SF
4031.70	61.00	3990.20	3970.70	103.31		OSF1.50	8100.00	8037.94					MinPt-O-SF
4127.36	62.08	4085.14	4065.28	103.88		OSF1.50	8580.00	8516.71					MinPt-O-SF
4127.94	79.61	4074.04	4048.33	80.23		OSF1.50	11900.00	11836.71					MinPts
4124.59	76.06	4073.05	4048.53	84.06		OSF1.50	12490.00	12283.08					MinPt-O-ADP
4124.27	76.67	4072.33	4047.60	83.36		OSF1.50	12899.53	12340.00					MinPt-CtCt
4124.34	319.48	3910.54	3804.90	19.51		OSF1.50	22093.82	12300.00					MinPts
Rover Operating Co Wimberly #5 (Offset) Oil Inc Only Off-5050ft (Def Survey)													
2932.26	32.81	2929.76	2899.45	N/A		MAS = 10.00 (m)	0.00	0.00					Surface
2932.05	32.81	2929.53	2899.25	121168.49		MAS = 10.00 (m)	20.00	20.00					MinPt-O-SF
2932.02	32.81	2929.50	2899.21	132310.93		MAS = 10.00 (m)	26.00	26.00					WRP
2931.98	32.81	2929.45	2899.18		94168.19	MAS = 10.00 (m)	40.00	40.00					MinPts
2929.04	61.38	2887.29	2867.66	74.56		OSF1.50	1210.00	1210.00					MinPt-CtCt
2930.20	118.92	2850.08	2811.27	37.72		OSF1.50	2310.00	2310.00					MinPt-CtCt
2931.45	122.68	2848.83	2808.77	36.56		OSF1.50	2390.00	2389.99					MINPT-O-EOU
2932.99	124.55	2849.13	2808.44	36.02		OSF1.50	2430.00	2429.96					MinPt-O-ADP
3330.88	263.50	3154.38	3067.38	19.13		OSF1.50	5120.00	5091.47					MinPt-O-SF
10707.19	224.59	10556.63	10482.60	72.39		OSF1.50	19190.00	12312.63					MinPt-O-SF
12772.56	255.69	12601.26	12516.86	75.65		OSF1.50	22093.82	12300.00					TD
Cimarex Dos Equis 11 Federal #1H Extreme+MWD Off to 15324ft (Def Survey)													
2950.73	32.81	2948.23	2917.92	N/A		MAS = 10.00 (m)	0.00	0.00					Surface
2950.69	32.81	2948.18	2917.88	420682.16		MAS = 10.00 (m)	26.00	26.00					WRP
2949.94	32.81	2946.92	2917.13	5683.16		MAS = 10.00 (m)	170.00	170.00					MinPts
2950.01	32.81	2946.86	2917.20	4578.66		MAS = 10.00 (m)	200.00	200.00					MINPT-O-EOU
2952.53	32.81	2943.96	2919.72	486.11		MAS = 10.00 (m)	1390.00	1390.00					MinPts
2953.78	32.81	2941.30	2920.97	295.58		MAS = 10.00 (m)	2300.00	2300.00					MINPT-O-EOU
2959.83	32.81	2947.09	2927.03	288.82		MAS = 10.00 (m)	2480.00	2479.88					MinPt-O-SF
2969.18	32.81	2956.41	2936.38	288.72		MAS = 10.00 (m)	2590.00	2589.50					MinPt-O-SF
3797.35	47.07	3765.13	3750.28	127.10		OSF1.50	8100.00	8037.94					MinPt-O-SF
3773.28	52.06	3737.74	3721.22	114.12		OSF1.50	10620.00	10596.71					MinPts
3773.31	52.10	3737.74	3721.21	114.05		OSF1.50	10630.00	10566.71					MinPt-O-ADP
3778.79	62.06	3736.58	3716.73	95.10		OSF1.50	10920.00	10866.71					MinPt-O-SF
3778.43	61.87	3736.34	3716.55	95.40		OSF1.50	10940.00	10876.71					MinPt-O-ADP
3778.07	61.48	3736.25	3716.59	96.02		OSF1.50	10970.00	10906.71					MINPT-O-EOU
3777.93	61.20	3736.32	3716.76	96.48		OSF1.50	11000.00	10936.71					MinPt-CtCt
3795.88	60.58	3754.66	3735.30	97.97		OSF1.50	11370.00	11306.71					MinPt-O-SF
3938.75	63.81	3895.38	3874.94	96.31		OSF1.50	12140.00	12065.88					MinPts
3991.24	74.72	3940.59	3916.52	82.85		OSF1.50	13080.00	12339.21					MinPt-CtCt
3993.56	92.99	3930.78	3900.64	66.21		OSF1.50	13590.00	12337.00					MINPT-O-EOU
3995.04	94.69	3931.09	3900.34	64.96		OSF1.50	13660.00	12336.69					MinPt-O-ADP
4032.47	161.35	3924.07	3871.12	38.06		OSF1.50	14940.00	12331.12					MinPt-CtCt
4017.48	239.43	3857.03	3778.06	25.42		OSF1.50	16460.00	12324.51					MinPt-CtCt
4017.57	296.48	3819.07	3721.07	20.49		OSF1.50	16560.00	12324.08					MinPts
4019.18	296.80	3820.49	3722.39	20.47		OSF1.50	16660.00	12323.64					MinPt-O-SF
6850.59	201.88	6715.17	6648.71	51.52		OSF1.50	22093.82	12300.00					TD
Rover Operating Co Wimberly #7 (Offset) Oil Inc Only Off-5118ft (Def Survey)													
2958.54	32.81	2956.04	2925.73	N/A		MAS = 10.00 (m)	0.00	0.00					Surface
2958.37	32.81	2955.85	2925.56	163666.09		MAS = 10.00 (m)	20.00	20.00					MinPt-O-SF
2958.35	32.81	2955.83	2925.54	207117.31		MAS = 10.00 (m)	26.00	26.00					WRP

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
2958.33	32.81	2955.76	2925.52	37132.41	MAS = 10.00 (m)	40.00	40.00					MinPts	
2962.42	46.02	2930.91	2916.40	102.03	OSF1.50	890.00	890.00					MinPt-CiCt	
2963.95	50.66	2929.34	2913.29	92.24	OSF1.50	1030.00	1030.00					MINPT-O-EOU	
2963.32	63.51	2920.15	2899.82	72.80	OSF1.50	1220.00	1220.00					MinPt-CiCt	
2964.08	65.90	2919.31	2898.18	70.06	OSF1.50	1310.00	1310.00					MINPT-O-EOU	
2963.27	87.67	2903.99	2875.60	52.15	OSF1.50	1700.00	1700.00					MinPt-CiCt	
2966.21	122.59	2883.65	2843.62	37.02	OSF1.50	2330.00	2330.00					MinPt-CiCt	
2967.21	125.90	2882.45	2841.31	36.04	OSF1.50	2410.00	2409.97					MINPT-O-EOU	
2968.97	128.04	2882.77	2840.92	35.44	OSF1.50	2460.00	2459.92					MinPt-O-ADP	
3326.84	266.46	3148.36	3060.38	18.89	OSF1.50	5220.00	5190.34					MinPts	
7979.62	122.19	7897.33	7857.43	99.97	OSF1.50	13610.00	12336.91					MinPt-CiCt	
7979.65	122.27	7897.30	7857.38	99.90	OSF1.50	13630.00	12336.82					MINPT-O-EOU	
7979.69	122.32	7897.31	7857.37	99.87	OSF1.50	13640.00	12336.78					MinPt-O-ADP	
10306.23	231.81	10150.86	10074.42	67.40	OSF1.50	20130.00	12308.54					MinPt-O-SF	
11648.74	255.26	11477.74	11393.49	69.11	OSF1.50	22093.82	12300.00					TD	

Bill J Graham Oil Hanagan D #3
(Offset) Oil Plugged Inc Only Off-
4986ft (Def Survey)

4008.59	32.81	4006.09	3975.76	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
4008.55	32.81	4006.04	3975.74	784055.78	MAS = 10.00 (m)	10.00	10.00					MinPt-O-SF
4008.53	32.81	4005.96	3975.72	60731.06	MAS = 10.00 (m)	26.00	26.00					MinPts
4003.05	96.56	3937.84	3906.48	63.80	OSF1.50	1860.00	1860.00					MinPt-CiCt
4008.36	124.32	3924.64	3884.03	49.32	OSF1.50	2420.00	2419.96					MINPT-O-EOU
4011.93	128.63	3925.39	3883.31	47.68	OSF1.50	2500.00	2499.84					MinPt-O-ADP
4016.95	133.74	3926.96	3883.21	45.88	OSF1.50	2580.00	2579.55					MinPt-O-ADP
4306.74	263.13	4130.48	4043.61	24.77	OSF1.50	5120.00	5091.47					MinPts
8256.28	135.87	8164.84	8120.38	92.83	OSF1.50	14920.00	12331.21					MinPt-CiCt
8256.40	136.30	8164.70	8120.10	92.53	OSF1.50	14970.00	12330.99					MINPT-O-EOU
8256.63	136.57	8164.75	8120.06	92.35	OSF1.50	15000.00	12330.86					MinPt-O-ADP
10324.32	240.12	10163.41	10084.20	65.18	OSF1.50	21120.00	12304.24					MinPt-O-SF
10936.78	252.53	10767.59	10684.25	65.60	OSF1.50	22093.82	12300.00					TD

Rover Operating Co Wimberly
#6 (Offset) Oil Inc Only Off-
5075ft (Def Survey)

4115.65	32.81	4113.15	4082.84	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
4115.62	32.81	4113.04	4082.81	51027.96	MAS = 10.00 (m)	20.00	20.00					MinPts
4115.62	32.81	4112.94	4082.81	22414.15	MAS = 10.00 (m)	26.00	26.00					WRP
4111.05	131.58	4022.50	3979.47	47.74	OSF1.50	2480.00	2479.88					MinPt-CiCt
4125.31	164.81	4014.61	3960.50	38.10	OSF1.50	3190.00	3183.21					MINPT-O-EOU
4126.68	166.25	4015.02	3960.44	37.78	OSF1.50	3230.00	3222.76					MinPt-O-ADP
4142.06	195.23	4011.07	3946.83	32.22	OSF1.50	3650.00	3638.02					MinPt-CiCt
4145.22	204.49	4008.06	3940.73	30.76	OSF1.50	3910.00	3895.10					MINPT-O-EOU
4158.13	219.51	4010.96	3938.62	28.72	OSF1.50	4260.00	4241.15					MinPt-O-ADP
4195.22	265.43	4017.43	3929.79	23.92	OSF1.50	5000.00	4972.82					MinPts
4196.35	265.57	4018.47	3930.78	23.91	OSF1.50	5070.00	5042.03					MinPt-O-SF
7386.55	105.95	7315.09	7280.60	107.07	OSF1.50	16270.00	12325.34					MinPt-CiCt
7387.18	107.85	7314.45	7279.33	105.14	OSF1.50	16370.00	12324.90					MINPT-O-EOU
7388.00	108.85	7314.60	7279.16	104.17	OSF1.50	16420.00	12324.68					MinPt-O-ADP
9403.97	242.66	9241.37	9161.32	58.72	OSF1.50	22093.82	12300.00					MinPt-O-SF

MCI Operating Jennings
Federal #1 (Offset) SWD Blind
Off-5019ft (Def Survey)

5400.61	32.81	5398.11	5367.80	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
5400.57	32.81	5398.06	5367.76	N/A	MAS = 10.00 (m)	10.00	10.00					MinPt-O-SF
5400.55	32.81	5398.05	5367.74	N/A	MAS = 10.00 (m)	26.00	26.00					WRP
5400.55	32.81	5384.03	5367.74	384.91	MAS = 10.00 (m)	2300.00	2300.00					MinPts
5400.86	32.81	5383.57	5368.06	364.79	MAS = 10.00 (m)	2490.00	2489.86					MINPT-O-EOU
5684.59	49.04	5651.06	5635.55	183.12	OSF1.50	6650.00	6604.23					MinPt-O-SF
8899.86	40.25	8872.19	8859.61	353.50	OSF1.50	12518.30	12291.21					MinPt-O-SF
7364.75	120.09	7283.86	7244.66	93.92	OSF1.50	17590.00	12319.59					MinPt-CiCt
7365.54	122.47	7283.06	7243.07	92.06	OSF1.50	17700.00	12319.12					MINPT-O-EOU
7366.44	123.55	7283.24	7242.89	91.25	OSF1.50	17750.00	12318.90					MinPt-O-ADP
8327.92	184.03	8204.40	8143.89	68.79	OSF1.50	21480.00	12302.67					MinPt-O-SF
8631.56	189.72	8504.24	8441.83	69.14	OSF1.50	22093.82	12300.00					TD

Tenneco Oil Company USA
Jennings Fed #3 (Offset)
Plugged Oil Inc Only Off-5030ft
(Def Survey)

5619.50	32.81	5617.00	5586.69	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
5619.38	32.81	5616.87	5586.57	371954.18	MAS = 10.00 (m)	20.00	20.00					MinPt-O-SF
5619.36	32.81	5616.84	5586.55	379924.85	MAS = 10.00 (m)	26.00	26.00					WRP
5619.33	32.81	5616.72	5586.52	52413.08	MAS = 10.00 (m)	50.00	50.00					MinPts
5619.43	33.22	5596.45	5586.21	274.25	OSF1.50	680.00	680.00					MinPt-CiCt
5614.49	125.63	5529.90	5488.86	68.37	OSF1.50	2390.00	2389.99					MinPt-CiCt
5616.80	132.55	5527.59	5484.24	64.76	OSF1.50	2570.00	2569.60					MINPT-O-EOU
5619.70	136.02	5528.16	5483.68	63.10	OSF1.50	2660.00	2659.05					MinPt-O-ADP
5694.05	221.84	5545.32	5472.21	38.92	OSF1.50	4180.00	4162.05					MINPT-O-EOU
5698.88	227.59	5546.32	5471.29	37.96	OSF1.50	4350.00	4330.14					MinPt-O-ADP
5739.77	260.80	5565.07	5478.97	33.32	OSF1.50	5040.00	5012.37					MinPts
5743.23	262.14	5567.64	5481.09	33.17	OSF1.50	5110.00	5081.58					MinPt-O-SF
8976.39	158.03	8870.20	8818.36	86.53	OSF1.50	12900.00	12340.00					MinPt-O-SF
7658.99	143.87	7562.24	7515.12	81.24	OSF1.50	17580.00	12319.64					MinPt-CiCt
7659.50	145.44	7561.70	7514.06	80.35	OSF1.50	17670.00	12319.25					MINPT-O-EOU
7660.24	146.34	7561.85	7513.90	79.85	OSF1.50	17720.00	12319.03					MinPt-O-ADP
8889.44	239.22	8729.12	8650.22	56.31	OSF1.50	22093.82	12300.00					MinPt-O-SF

MCI Operating Jennings
Federal #5 (Offset) Oil Inc Only
Off-4950ft (Def Survey)

6722.44	32.81	6719.94	6689.63	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
6722.33	32.81	6719.82	6689.53	532234.04	MAS = 10.00 (m)	20.00	20.00					MinPt-O-SF
6722.31	32.81	6719.80	6689.51	543742.92	MAS = 10.00 (m)	26.00	26.00					WRP
6722.29	32.81	6719.68	6689.48	60285.39	MAS = 10.00 (m)	50.00	50.00					MinPts
6721.91	129.78	6634.55	6592.13	79.19	OSF1.50	2510.00	2509.81					MinPt-CiCt
6730.84	154.77	6626.83	6576.07	66.28	OSF1.50	3130.00	3123.88					MINPT-O-EOU
6745.63	250.46	6577.83	6495.17	40.79	OSF1.50	4770.00	4745.41					MinPt-CiCt
6747.54	256.20	6575.91	6491.34	39.88	OSF1.50	5000.00	4972.82					MINPT-O-EOU
6748.48	257.44	6576.02	6491.04	39.69	OSF1.50	5050.00	5022.25					MinPt-O-ADP
6748.69	257.63	6576.10	6491.05	39.66	OSF1.50	5060.00	5032.14					MinPt-O-SF

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
9547.41	168.46	9434.27	9379.99	86.27	OSF1.50	12900.00	12340.00					MinPt-O-SF	
7418.91	153.81	7315.54	7265.10	73.52	OSF1.50	18910.00	12313.85					MinPt-CtCt	
7419.74	156.18	7314.78	7263.55	72.39	OSF1.50	19020.00	12313.37					MINPT-O-EOU	
7420.65	157.28	7314.96	7263.37	71.89	OSF1.50	19070.00	12313.16					MinPt-O-ADP	
8073.46	228.90	7920.03	7844.56	53.47	OSF1.50	22093.82	12300.00					MinPt-O-SF	

MCI Operating Jennings Federal #2 (Offset) Inc Only Off-5000ft (Def Survey)													
9182.88	32.81	9180.38	9150.07	N/A	MAS = 10.00 (m)	0.00	0.00					Surface	Pass
9182.75	32.81	9180.24	9149.94	574901.48	MAS = 10.00 (m)	26.00	26.00					WRP	
9182.69	32.81	9180.12	9149.89	121524.10	MAS = 10.00 (m)	60.00	60.00					MinPts	
9161.31	371.62	8912.72	8789.68	37.22	OSF1.50	5170.00	5140.90					MinPts	
9161.31	371.62	8912.72	8789.69	37.22	OSF1.50	5180.00	5150.79					MinPt-O-SF	
9811.27	255.58	9640.04	9555.68	58.14	OSF1.50	14730.00	12332.04					MinPt-O-SF	
7247.60	205.84	7109.54	7041.76	53.45	OSF1.50	21340.00	12303.28					MinPt-CtCt	
7248.54	208.64	7108.61	7039.90	52.73	OSF1.50	21460.00	12302.76					MINPT-O-EOU	
7249.76	210.09	7108.87	7039.67	52.37	OSF1.50	21520.00	12302.50					MinPt-O-ADP	
7266.37	225.18	7135.42	7061.19	49.03	OSF1.50	22093.82	12300.00					MinPt-O-SF	

MCI Operating Jennings Federal #4 (Offset) Oil Inc Only Off-5000ft (Def Survey)													
8043.24	32.81	8040.74	8010.44	N/A	MAS = 10.00 (m)	0.00	0.00					Surface	Pass
8043.22	32.81	8040.72	8010.41	N/A	MAS = 10.00 (m)	10.00	10.00					MinPt-O-SF	
8043.21	32.81	8040.65	8010.40	125863.82	MAS = 10.00 (m)	26.00	26.00					WRP	
8043.21	44.33	8012.82	7998.88	288.30	OSF1.50	860.00	860.00					MinPt-CtCt	
8036.67	147.18	7937.71	7889.49	83.30	OSF1.50	2840.00	2837.15					MinPt-CtCt	
8040.74	159.52	7933.57	7881.23	76.79	OSF1.50	3230.00	3222.76					MINPT-O-EOU	
8045.97	165.71	7934.66	7880.25	73.92	OSF1.50	3430.00	3420.50					MinPt-O-ADP	
8030.28	228.90	7876.83	7801.36	53.19	OSF1.50	4360.00	4340.03					MinPt-CtCt	
8034.89	242.60	7872.32	7792.29	50.18	OSF1.50	4770.00	4745.41					MINPT-O-EOU	
8039.39	247.99	7873.23	7791.40	49.11	OSF1.50	4940.00	4913.49					MinPt-O-ADP	
8049.90	263.52	7873.33	7786.38	46.25	OSF1.50	5220.00	5190.34					MinPts	
9879.47	182.24	9757.14	9697.23	82.43	OSF1.50	13620.00	12336.87					MinPt-O-SF	
7334.10	181.10	7212.53	7153.00	61.58	OSF1.50	20240.00	12308.07					MinPt-CtCt	
7334.94	183.54	7211.75	7151.40	60.75	OSF1.50	20350.00	12307.59					MINPT-O-EOU	
7335.86	184.66	7211.92	7151.20	60.39	OSF1.50	20400.00	12307.37					MinPt-O-ADP	
7564.94	224.85	7414.21	7340.09	51.02	OSF1.50	22093.82	12300.00					MinPt-O-SF	

MCI Operating Jennings Federal #6 (Offset) Oil Inc Only Off-4933ft (Def Survey)													
8192.64	32.81	8190.14	8159.83	N/A	MAS = 10.00 (m)	0.00	0.00					Surface	Pass
8192.52	32.81	8190.00	8159.71	575092.48	MAS = 10.00 (m)	26.00	26.00					WRP	
8192.48	32.81	8189.82	8159.67	51444.29	MAS = 10.00 (m)	60.00	60.00					MinPts	
8198.15	126.63	8112.90	8071.52	99.04	OSF1.50	2410.00	2409.97					MinPt-CtCt	
8200.90	139.22	8107.25	8061.68	89.94	OSF1.50	2690.00	2688.80					MINPT-O-EOU	
8213.57	157.28	8107.88	8056.29	79.58	OSF1.50	3100.00	3094.22					MINPT-O-EOU	
8261.22	245.26	8096.88	8015.96	51.03	OSF1.50	4670.00	4646.54					MINPT-O-EOU	
8265.94	250.94	8097.82	8015.00	49.89	OSF1.50	4860.00	4834.39					MinPt-O-ADP	
8272.58	256.52	8100.73	8016.06	48.83	OSF1.50	5050.00	5022.25					MinPt-O-SF	
7727.32	191.05	7599.12	7536.27	61.45	OSF1.50	20230.00	12308.11					MinPt-CtCt	
7727.95	193.01	7598.44	7534.93	60.83	OSF1.50	20330.00	12307.67					MINPT-O-EOU	
7728.95	194.21	7598.64	7534.74	60.46	OSF1.50	20390.00	12307.41					MinPt-O-ADP	
7948.61	229.90	7794.51	7718.71	52.41	OSF1.50	22093.82	12300.00					MinPt-O-SF	