

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)	
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	7. Lease Name or Unit Agreement Name STATE
2. Name of Operator HUNTINGTON ENERGY, LLC	8. Well Number 1
3. Address of Operator 908 N.W. 71 st ST., OKLAHOMA CITY, OK 73116	9. OGRID Number 208706
4. Well Location Unit Letter <u>K</u> : <u>1983</u> feet from the <u>S</u> line and <u>1954</u> feet from the <u>W</u> line Section <u>36</u> Township <u>13S</u> Range <u>37E</u> NMPM County <u>LEA</u>	10. Pool name or Wildcat KING, WOLFCAMP
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3838' GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL. <input type="checkbox"/> DOWNHOLE COMMINGLE <input type="checkbox"/> CLOSED-LOOP SYSTEM <input type="checkbox"/> OTHER: <input type="checkbox"/>		SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>	
---	--	---	--

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

MI-R&EQUIP - ND TREE - NU BOP - RU FLOOR & TONGS
 RIH CIBP & SET AT 9212' - RIH TBG - COND. HOLE WITH 9.5# WBM
 SPOT 25 SX CL H FROM 9212' - 9002'
 SPOT 25 SX CL C FROM 7000' - 6750' WOC & TAG
 CUT 5.5" CSG AT 4960'
 SPOT 35 SX CL C FROM 4960' - 4860' WOC & TAG
 SPOT 35 SX CL C FROM 4705' - 4605' WOC & TAG
 SPOT 35 SX CL C FROM 2500' - 2400' WOC & TAG
 SPOT 35 SX CL C FROM 433' - 333' WOC & TAG
 SPOT 70 SX CL C FROM 200' - SURFACE, TOP OFF WELL, CUT & CAP

**See Attached
 Conditions of Approval**

Verify cement to surface all strings Install 4" diameter 4' tall above ground marker

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.


SIGNATURE *Kevin Peranton* TITLE Agent For DATE 11/10/20
 Type or print name KEVIN PERANTON E-mail address: KPERANTON@AAAANWELLSERVICE.US PHONE: 832-585-5285
For State Use Only

APPROVED BY: *Kerry Fortner* TITLE Compliance Officer A DATE 11/17/20
 Conditions of Approval (if any)

CURRENT

State #1
Completion
Sec 36-T13S-R37E
Lea County, New Mexico
1983 FSL 1954 FWL

API 30-025-05099
Today's Date Jan 16, 2014
Spud Dec 3, 2013
Completed

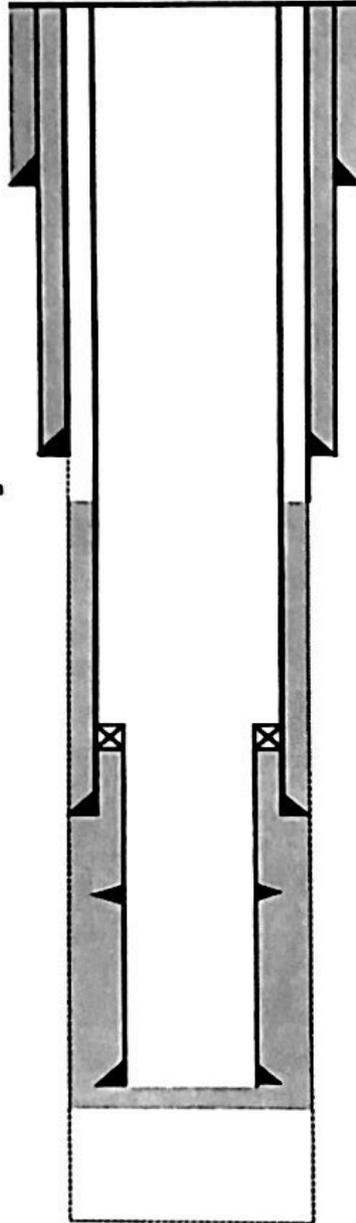

KB NA
GL 3838'

13-3/8" set at 383'
Cemented w/400 sacks to surface

Rods
4.317' 3/4" Norm 97
4.587' 5/8" Norm 97
300' 1" Sinker bars
2-1/2" x 1-1/2" x 20' pump

9-5/8" 40# set at 4655'
Cemented w/1500 sacks to surface

305' gap Called NMOCD 12-19-13
OK w/Paul Kautz w/NMOCD

TOC 5 1/2" @ 4960'

San Andres 4594'
Wolfcamp 9360'

Liner hanger @ 9212'

5-1/2" 17# P-110 set @ 9,340'
Cement with 550 sacks 50/50 POZ lead and
Tail in with 425 sacks Super H

9,382'-9,416' 4 SPF 96 holes

50 sack plug @ 9613-9663

3-1/2" 8.3# P-110 from 9212.44 - 9610'
120 cc Cls H, 15 # ppg, 1.18 yld. Dropped plug
Diapl 49 bbl KCL w/ Bump plug. Set pkr. Circ 5
bbl cmt to pt. Test liner top to 1000 psi


LANDING COLLAR @ 9577' (PBD)

PBTD 9,663'
TD 10,250'

PROPOSED

State #1
 Completion
 Sec 36-T13S-R37E
 Lea County, New Mexico
 1963 FSL 1954 FWL

APT: 30-025-05009
 Today's Date: Jan 16, 2014
 Spud: Dec 3, 2013
 Completed:

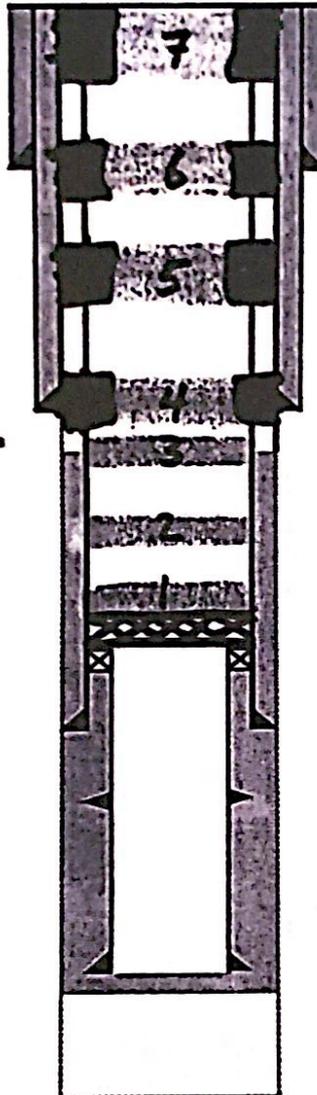

KB NA
 GL 3838'

13-3/4" out at 383'
 Cemented w/400 sacks to surface

Rods
 4,213 3/4" Mono 97
 4,887 5/8" Mono 97
 308' 1" Sinker bars
 2-1/2" x 1-1/2" x 20' pump

305' gap Called NMDCO 12/18/13
 OK w/Paul Hantz w/NMDCO

San Andres: 4894'
 Wolfcamp: 6387'

Liner hanger @ 5212'

9-5/8" 408 out at 4855'
 Cemented w/1500 sacks to surface

TOC: 5 1/2" @ 4887'

50 sack plug @ 9813-8863

CIBP SET @ 9212'
 1. 9212'-9002' 25H
 2. 7000'-6750' 25C
 3. 4960'-4860' 35C
 4. 4705'-4605' 35C
 5. 2500'-2400' 35C
 6. 433'-333' 35C
 7. 100'-3' 35C
 * = WOC + TAB

PBTD 9,663'
 TD 10,250'