

Submit 1 Copy To Appropriate District Office
District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (575) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Received NMOCD 11/18/20

Form C-103

Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.

30-025-05401

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

H.L. Batton 'A'

8. Well Number 1

9. OGRID Number

232611

10. Pool name or Wildcat

Lovington Paddock; Pool ID 40660

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

SUNDOWN ENERGY LP

3. Address of Operator

16400 DALLAS PARKWAY, STE. 100 DALLAS, TX 75248

4. Well Location

Unit Letter E : 1653 feet from the NORTH line and 330 feet from the WEST line
Section 5 Township 17-S Range 37-E NMPM LEA County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3808' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☒
CASING/CEMENT JOB ☐ PNR

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

10/19/2020 – 10/21/2020:

- 1) MIRU P&A rig.
- 2) Pump 25 sx balance cement on top of existing CIBP & cmt f/ 5893' – 6140'.
- 3) Perf and squeeze 50 sxs cement 2719' – 3100' (Yates)
- 4) Perf and squeeze 25 sxs cement 2376' – 2500' (Btm of Salt)
- 5) Perf and squeeze 50 sxs cement 1870' – 2150' (Surf csg shoe)
- 6) Perf and squeeze 25 sxs cement 1003' – 1250' (top of salt)
- 7) Perf and squeeze 25 sxs cement from 0 to 200' (FW & surface plug).
- 8) Cut of wellhead 3' below GL. Install dry hole marker. Well P&A'd 10/21/2020

Spud Date:

Rig Release Date:

11/20/2020 - PM NMOCD

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Belinda Bradley TITLE Field Production Analyst DATE 11/18/2020
Type or print name Belinda Bradley E-mail address: bbradley@sundownenergy.com PHONE 432-943-8770

For State Use Only

APPROVED BY: Kerry Fortner TITLE Compliance Officer A DATE 11/20/20
Conditions of Approval (if any):

FINAL WELLBORE

WELL DATA SHEET

LEASE: Batten "A"

WELL: #1

FIELD: Lovir

LOC: 1653' FNL, 330' FWL Unit E, Sec 5

T: 17-S R: 37-E

API: 30-025-541


STATUS: P&A

CO: Lea

ST: New Mexico

TD: 6300'

PBTD: 6295'

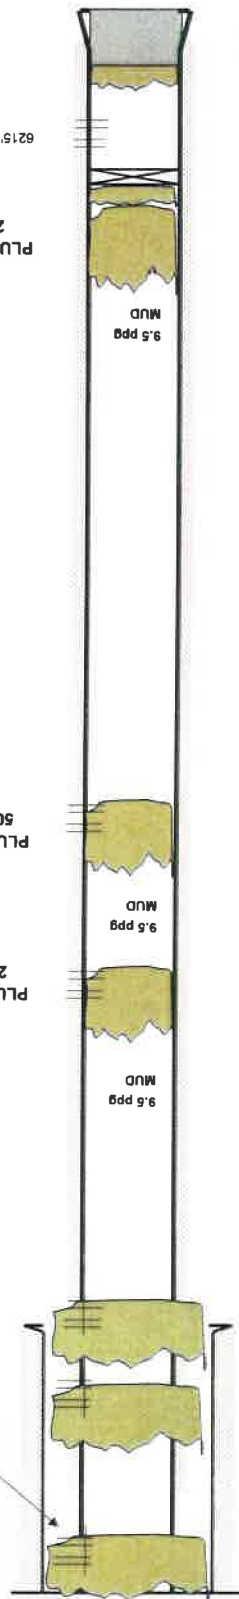

PBTD = 6295'
TD = 6300'

CBLP @ 6180' w/ 40' cmt on top
Dump Balled CMT @ 6140'

6215' - 6290'

PLUG #1
25 sx balanced cement plug 5893' to 6140' (Plug back Perts)

MUD
9.5 ppg

PLUG #2
50 sx perf and squeeze cement plug from 2719' to 3100' (Yates)

MUD
9.5 ppg

PLUG #3
25 sx perf and squeeze cement plug from 2376' to 2500' (Btm of Salt)

MUD
9.5 ppg

Hole Size: 7 7/8" (10,600')
OD, 15 5 #/ft, grade J-55, LT&C, new
csg set @ 6298' w/ 800 sx.
in 1 stages w/DV tool @ 3380' By CBL
Circ? No TOC @ 3380'

Top of cmt at 3380'

PLUG #4
50 sx perf and squeeze cement plug from 1870' to 2150' (Surf Csg Shoe)

(Top of Salt)

PLUG #5
25 sx perf and squeeze cement plug from 1003' to 1250' (Fresh Wtr & Surface Plug)

Csg Detail: 17-1/4" (800')
Hole Size: 9 5/8"
OD, 32 5 #/ft, grade J-55, ST&C, new
csg set @ 2116' w/ 1200 sx.
Circ? Yes TOC @ Surface By Circulation

3808' GL

-Before-

CURRENT WELLBORE

WELL DATA SHEET

LEASE: Batten "A" WELL: #1 FIELD: LOC: STATUS: TA TD: 6300' PBD: 6295' CO: Lea ST: New Mexico

Csg Detail: Hole Size: 9 5/8" OD: 32.5 #ft. grade J-55, ST&C, new Csg set @ 2116' w/ 1200 BY Surface Circ? Yes TOC @ CBL

Hole Size: 5-1/2" OD: 15.5 #ft. grade J-55, LT&C, new Csg set @ 6298' w/ 800 BY TOC @ 3380' CBL

Top of cmt at 3380'

Dump Bailed CMT @ 5140'
CMT @ 5180' w/ 40' cmt on top

PBD = 6285'
TD = 6300'

0215 - 0290'

RECEIVED
JUN 09 2020
HOBBS OCD