

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-05-10039
5. Indicate Type of Lease STATE [X] FEE []
6. State Oil & Gas Lease No. K-8250
7. Lease Name or Unit Agreement Name MCCALESTER STATE
8. Well Number 1
9. OGRID Number
10. Pool name or Wildcat TOBAC PENN
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4394' GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)
1. Type of Well: Oil Well [X] Gas Well [] Other []
2. Name of Operator ENDEAVOR ENERGY RESOURCES, LP
3. Address of Operator 110 NORTH MARIENFELD, SUITE 200, MIDLAND, TX 79701
4. Well Location Unit Letter O : 1980 feet from the EAST line and 660 feet from the SOUTH line
Section 20 Township 8S Range 33E NMPM CHAVEZ County

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK [] PLUG AND ABANDON [X]
TEMPORARILY ABANDON [] CHANGE PLANS []
PULL OR ALTER CASING [] MULTIPLE COMPL []
DOWNHOLE COMMINGLE []
OTHER: []
SUBSEQUENT REPORT OF:
REMEDIAL WORK [] ALTERING CASING []
COMMENCE DRILLING OPNS. [] P AND A []
CASING/CEMENT JOB []
OTHER: []

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1. NOTIFY NMOCD 24 HRS. BEFORE MIRU.
2. MIRU. ND WH, NU BOPE.
3. SET CIBP@8922'. SPOT 20SX CLASS "C" CEMENT ON TOP 25 sx Class H
4. PERF&SQZ 30SX OF CLASS "C" CEMENT FROM 8200'-8100'. Class H
5. PERF&SQZ 30SX OF CLASS "C" CEMENT FROM 6500'-6400'.
6. PERF&SQZ 40SX OF CLASS "C" CEMENT FROM 3664'-3564'. (SHOE) WOC&TAG
7. PERF&SQZ 45SX OF CLASS "C" CEMENT FROM 1200'-1100'. WOC&TAG
8. PERF&SQZ 45SX OF CLASS "C" CEMENT FROM 419'-319'. (SHOE)WOC&TAG
9. SPOT 10SX OF CLASS "C" CEMENT FROM 30' SURFACE. (SURFACE) P&S 50 sx Class C 150' circ to surface
10. CUTOFF WELLHEAD, ANCHORS 3' BELOW SURFACE AND INSTALL DRYHOLE MARKER. TURN OVER FOR RECLAMATION. 4" diameter 4' tall above ground marker
CLOSED LOOP CONTAINMENT SYSTEM WILL BE USED FOR FLUIDS.

Spud Date: []

Rig Release Date: []

See Attached Conditions of Approval

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE SR. REGULATORY ANALYST DATE 11/23/20

Type or print name JAN SOUTH E-mail address: JSOUTH@EERONLINE.COM PHONE: (432)687-1575
For State Use Only

APPROVED BY: Kerry Fortner TITLE Compliance Officer A DATE 12/3/20
Conditions of Approval (if any)

**WELLBORE DIAGRAM
McAlester #1**

PROPOSED

Created: 11/23/20	By: _____	Well #: 1
Updated: _____	By: _____	API: 30-005-10039
Lease: MCALESTER		Unit Ltr.: O Sec. 20
Field: TOBAC PENN		TSHR/Rng: 8S-33E
Surf. Loc.: 1980' FEL & 660' FSL		Pool Code: _____ OGRID: _____
Bot. Loc.: _____		Directions: _____
County: CHAVEZ	St.: NM	
Status: _____		


Surface Casing
 Size: 13-3-8"
 Wt., Grd.: 48#
 Depth: 369'
 Sxs Cmt: 350
 Circulate: yes
 TOC: surface
 Hole Size: 17-1/2"

Intermediate Casing
 Size: 8-5/8"
 Wt., Grd.: 24#/28#
 Depth: 3614'
 Sxs Cmt: 350
 Circulate: yes
 TOC: UNKNOWN
 Hole Size: 11"

FORMATION TOPS	

Production Casing
 Size: 4 1/2"
 Wt., Grd.: 15.5/17
 Depth: 9137'
 Sxs Cmt: 200
 Circulate: no
 TOC: unknown
 Hole Size: 7-7/8"

Open Hole 9141'-9137'
 Size: 7-7/8"
 Depth: 9141'

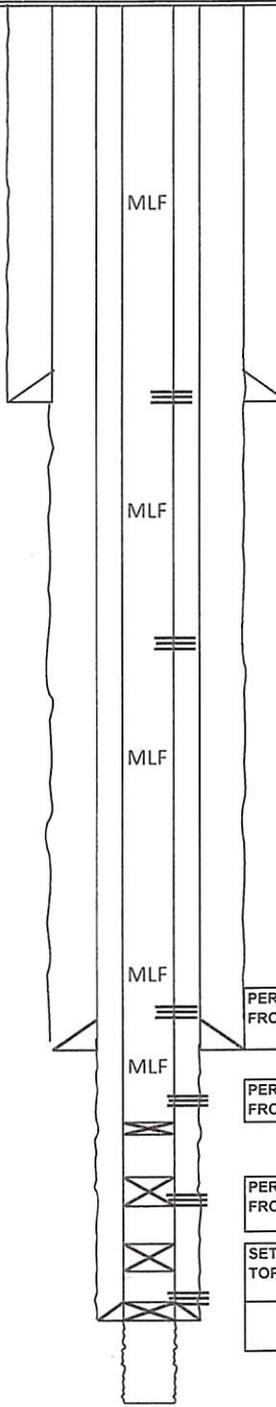

~~SPOT 40SX~~ OF CEMENT FROM 15'X SURFACE. VERIFY CEMENT AT SURFACE. **P&S 50 sx Class C 150' Circ cement to surface**

PERF AND SQUEEZE 45SX OF CEMENT FROM 419'-319'. WOC&TAG

PERF AND SQUEEZE 45SX OF CEMENT FROM 1200'-1100'. WOC&TAG

PERF AND SQUEEZE 40SX OF CEMENT FROM 3664'-3564'. WOC&TAG

PERF AND SQUEEZE 30SX OF CEMENT FROM 6500'-6400'.

PERF AND SQUEEZE 30SX OF CEMENT FROM 8200'-8100' **Class H**

SET CIBP@8922'. SPOT ~~20SX~~ CEMENT ON TOP **25 sx Class H**

PERFORATIONS FROM 9027'-9022'