

Submit 3 Copies To Appropriate District

Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87401

District IV

1220 S. St. Francis Dr., Santa Fe, NM

87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

March 4, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well:
Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Chevron USA Inc.

3. Address of Operator
#15 Smith Rd., Midland, TX 79705

4. Well Location
Unit Letter E : 2310 feet from the NORTH line and 990 feet from the WEST line
Section 23 Township 19-S Range 36-E NMPM Lea County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

Pit or Below-grade Tank Application (For pit or below-grade tank closures, a form C-144 must be attached)

Pit Location: UL E Sect 23 Twp 19-S Rng 36-E Pit type Steel Depth to Groundwater Distance from nearest fresh water well

Distance from nearest surface water Below-grade Tank Location UL Sect Twp Rng ;

2310 feet from the North line and 990 feet from the West line (Steel)

12. Check Appropriate Box to Indicate N
NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

REPORT OF: ALTERING CASING ☐

COMMENCEMENT ☐

CASING TEST AND CEMENT JOB

OTHER:

The Oil Conservation Division Must be notified 24 hours prior to the beginning of plugging operations.

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed or recompletion.

1. Notify OCD 24 hrs. prior to MI and RU.
2. RIH, ~~set~~ set CIBP @ 6700' and spot 25sx of class "C" cement plug from 6700'-6500' (perfs) . WOC&TAG.
3. Displace hole w/MLF, 9.5# Brine w/25# gel P/BBL.
4. Perf and squeeze 55sx class "C" cement plug from 4645'-4445' (S.Andres). WOC&TAG.
5. Perf and squeeze 95sx class "C" cement plug from 2978'-2620' (Yates/B.Salt/shoe). WOC&TAG.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE M. Lee Roark TITLE Agent for Chevron USA, Inc. DATE 10-18-2011

Type or print name M. Lee Roark E-mail address: Telephone No. 432-561-8600

(This space for State use)

APPROVED BY [Signature] TITLE SAF MGR DATE 10-20-2011
Conditions of approval, if any:

OCT 20 2011

Submit 3 Copies To Appropriate District
Office

District I

1625 N French Dr, Hobbs, NM 88240

District II

1301 W Grand Ave, Artesia, NM 88201

District III

1000 Rio Brazos Rd, Aztec, NM 87410

District IV

1220 S St Francis Dr, Santa Fe, NM

87505

State of New Mexico

Energy, Minerals and Natural Resources

Form C-103

March 4, 2004

HOBBS OCD

OCT 20 2011

RECEIVED

CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-025-35067

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

MONUMENT 23 STATE

8. Well Number

28

9. OGRID Number

4323

10. Pool name or Wildcat
MONUMENT; YESO, NW

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Chevron USA Inc.

3. Address of Operator

#15 Smith Rd., Midland, TX 79705

4. Well Location

Unit Letter E : 2310 feet from the NORTH line and 990 feet from the WEST line

Section 23 Township 19-S Range 36-E NMPM Lea County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

Pit or Below-grade Tank Application (For pit or below-grade tank closures, a form C-144 must be attached)

Pit Location: UL E Sect 23 Twp 19-S Rng 36-E Pit type Steel Depth to Groundwater Distance from nearest fresh water well

Distance from nearest surface water Below-grade Tank Location UL Sect Twp Rng ;

2310 feet from the North line and 990 feet from the West line (Steel Tank)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

6. Perf and squeeze 55sx cement plug from 1591'-1391' (T.Salt). WOC&TAG.

7. Perf and squeeze 140sx cement plug from 520'-surface' (shoe/Fr.Wtr./surface). Verify TOC.

8. Install dryhole marker and clean location.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE M. Lee Roark TITLE Agent for Chevron USA, Inc. DATE 10-18-2011

Type or print name M. Lee Roark E-mail address: Telephone No. 432-561-8600

(This space for State use)

APPROVED BY [Signature] TITLE STAFF MGR DATE 10-20-2011
Conditions of approval, if any:

PLUGGING & ABANDONMENT WORKSHEET

(3 STRING CSG)

OPERATOR CHEVRON U.S.A. Inc.

LEASENAME Monument 23 STATE

WELL # 28

SECT 23 TWN 195 RNG 36E


FROM 2310' N/S L 990' E/W L

TD: 7495'

FORMATION @ TD

PBTD:

FORMATION @ PBTD

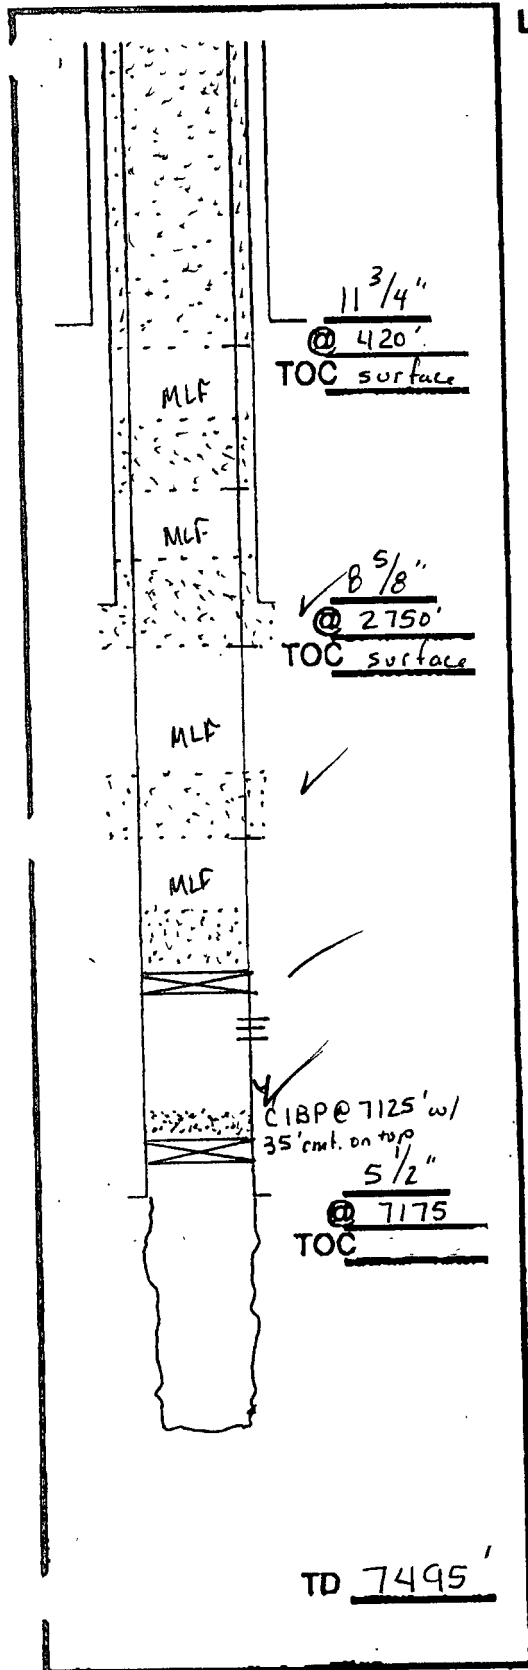

	SIZE	SET @	TOC	TOC DETERMINED BY	
SURFACE	11 3/4 "	420'	surface	circulated	
INTMED 1	8 5/8 "	2750'	surface	circulated	
INTMED 2					
PROD	5 1/2 "	7175'	5550	CBL	
	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					
	CUT & PULL @			TOP - BOTTOM	
INTMED 1			PERFS	6748' - 6965'	
INTMED 2			OPENHOLE	7175 - 7495	
PROD					

* REQUIRED PLUGS DISTRICT I

MUTLER (AMPTD)	
YATES	2878'
QUEEN	3770'
GRAYBURD	4139'
SAN ANDRES	4545'
T. Salt	1491'
CAPTAIN REEF	
B. Salt	2720'
DELAWARE Sand	4830'
BELL CANYON	*
CHERRY CANYON	
BRUBBY CANYON	
BONE SPRING	
FLORIDA	
BLUESAY	
TURB	
OLDMEAD	
ABO	7147'
WC	
PERM	
STRAWN	
ATOKA	
MORROW	
SON	
DEVONIAN	

PLUG	TYPE	BACKS	DEPTH
PLUG	PLUG	CMT	
EXAMPLES			
PLUG #1	OH	25 SXS	9850'
PLUG #2	SHOE	50 SXS	8700'-8800'
PLUG #3	CIBP/35'		5300'
PLUG #4	CIBP	25 SXS	5200'
PLUG #5	STUB	50 SXS	4600'-4700'
PLUG #6	RETRN SQZ	200 SXS	400'
PLUG #7	SURF	10 SXS	0-10'
PLUG #8	CIBP	25sx	6700'-6500'
PLUG #9	S. Andrs	55sx	4645' - 4445'
PLUG #10	Yates	95sx	2978' - 2620'
PLUG #11	B. Salt		
PLUG #12	shoe		
PLUG #13	T. Salt	55sx	1591' - 1391'
PLUG #14	shoe	140sx	520' - surface
PLUG #15	Fr. Wtr.		
PLUG #16	surface		
PLUG #17			
PLUG #18			
PLUG #19			
PLUG #20			

Well **Monument 23 State #28**Field **Monument****Location:**


990' FWL & 2310' FNL
 Section 23
 Township 19-S
 Range 36-E
 County Lea State: NM

Elevations:

GL 3735'
 KB 3748'
 DF 3747'

**Proposed
Wellbore Diagram****Well ID Info:**

Chevno: BZ6961
 API No 30-025-35067
 L5/L6: UCU936000
 Spud Date: 8/8/2000
 Compl. Date: 9/25/2000

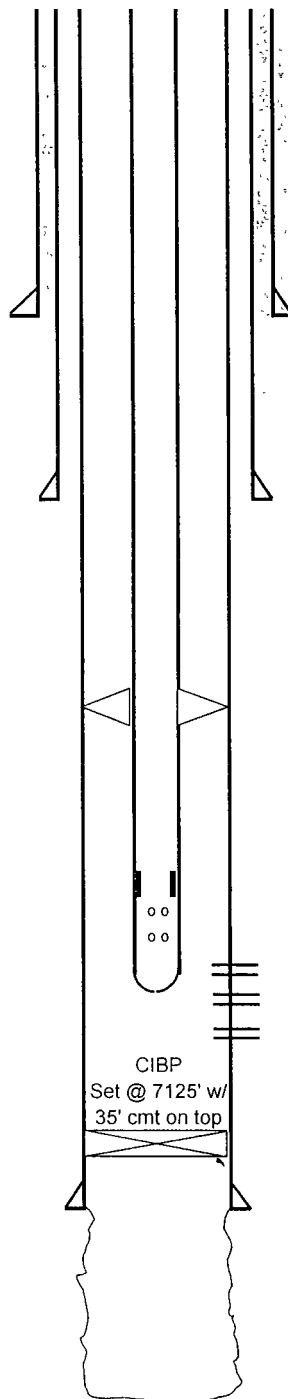

Surf. Csg: 11 3/4", 42#, H-40
Set: @ 420' w/ 350 sks
Hole Size: 14 3/4"
Circ: Yes **TOC:** Surface
TOC By: Circulated

Inter. Csg: 8 5/8", 24#, K-55
Set: @ 2750' w/ 900 sks
Hole Size: 12 1/4"
Circ: Yes **TOC:** Surface
TOC By: Circulated

Perforation: Status

6748'-6756' Open - Drinkard
 6764'-6780' Open - Drinkard
 6884'-6891' Open - Drinkard
 6954'-6958' Open - Drinkard
 6960'-6965' Open - Drinkard

Rod Details

Joints	Part	Btm Depth	Grade
1	Polished Rod 1 5"	22	C
1	Rod Sub 1"	26	KD
1	Rod Sub 1"	32	KD
1	Rod Sub 1"	38	KD
1	Rod Sub 1"	46	KD
82	Steel Sucker Rod 1"	2,071	KD
100	Steel Sucker Rod 7/8"	4,571	KD
82	Steel Sucker Rod 3/4"	6,621	KD
14	Sinker Bar 1 1/2"	6,971	K
1	Guided Rod Sub 7/8"	6,975	
1	Rod Pump 1 1/2"	6,999	
1	Gas Anchor 1 1/4"	7,000	

Tubing detail

Joints	Part	Btm Depth	Grade
203	Tubing 2 7/8"	13	J-55
1	Marker Sub 2 7/8"	6337	J-55
10	Tubing 2 7/8"	6341	J-55
1	T A C 2 7/8"	6652	
9	Tubing 2 7/8"	6655	J-55
2	IPC Tubing 2 7/8"	6936	J-55
1	Seat Nipple 2 7/8"	6999	
1	Tubing Sub 2 7/8"	7000	J-55
1	Cavins D- Sander 2 7/8"	7004	
1	Mud Anchor 2 7/8"	7024	J-55
1	Dump Valve 2 7/8"	7055	

COTD:
PBTD: 7125'
TD: 7495'

Updated: 08/10/2011
By: Mohammad Siddiqui

Circ: No **TOC:** 5550'
TOC By: Cmt Bond Log

Open Hole: 7175'-7495'