

Submit 3 Copies To Appropriate District
Office
District I
1625 N French Dr, Hobbs, NM 87240
District II
1301 W Grand Ave, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S St Francis Dr, Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources
HOBBS OGD
NOV 10 2010
OIL CONSERVATION DIVISION
200 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
June 19, 2008

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-06317
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator XTO Energy, Inc.		6. State Oil & Gas Lease No.
3. Address of Operator 200 N. Loraine, Ste. 800 Midland, TX 79701		7. Lease Name or Unit Agreement Name: Eunice Monument South Unit
4. Well Location Unit Letter F ; 2310 feet from the North line and 1650 feet from the West line Section 32 Township 20S Range 37E NMPM County Lea		8. Well Number 151
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3540' GL		9. OGRID Number 005380
		10. Pool name or Wildcat Eunice Monument; Grayburg-San Andres

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- Perf and SOE
- MIRU PU, RIH w/ 2 3/8" notched collar on WS to TOC @ 3630', circ w/9ppg mud (min 90 bbls).
 - Spot balanced cmt plug (25 sxs) from 3630-3480', WOC 4 hrs, tag TOC @ 3480'. **2B. SPOT 25 SX at 2600' (B.SALT)**
 - ~~Spot balanced cmt plug (25 sxs) from 1210-1060, WOC 4 hrs, tag TOC @ 1060'. PUH.~~
 - ND BOP. NU WH. ~~Spot balanced cement plug (52 sxs) from 300'-Surface. POOH & LD 2 3/8" notched collar & WS. WOC 4 hrs.~~ **Perf and SOE**
 - RDMO PU, cut off WH & anchors, install dry hole marker, re-see and reclaim location.

Spud Date:

Rig R

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Sharon Hindman TITLE Regulatory Analyst DATE 11/09/2011

Type or print name Sharon Hindman E-mail address: sharon.hindman@xtoenergy.com PHONE 432-620-6741

For State Use Only
APPROVED BY Mark W. Pritch TITLE Compliance Officer DATE 11-10-2011

Conditions of Approval (if any):

WELL DATA SHEET

LEASE: EMSU WELL: 151

LOC: 2310' F N L & 1650' F W L SEC: 32

TOWNSHIP: 20S CNTY: Lea

RANGE: 37E UNIT: F ST: N.M.

(formerly: Turner State #3)

FORM: Grayburg / San Andres DATE: _____

GL: 3540' STATUS: SI Producer

KB: 3540' API NO: 30-025-06317

DF: _____ CHEVNO: FA 74340.01

Date Completed: 11/37

Initial Production: F/636 BOPD

Initial Formation: Grayburg

FROM: 3734' to 3843' / GOR 2740

Completion Data

8/37 ACDZ w/ 300 gals acid.

Subsequent Workover or Reconditioning:

1/52 Install pmg unit

11/85 COWH. Log w/ CNL, CCL, GR, OH caliper. Acdz w/ 3500 gals 15% NeFe + 800# GRS. ISIP - vac. Swb dry - Rec'd 6 BW. SFL-3600'. EFL-3650'. Chem sqzd. RIH w/ PE. Test. 4 BO/ 16 BW/ 14 mcfg. B/4 - 6 BO/ 5 BW.

10/87 CO 5' fill. Deepen to 3870'. Perf 3652-66, 3670-82'. Acdz w/ 1900 gals 15% NeFe HCL + 40 Bs. ISIP - 1800 psi. Swb - rec'd 28 BW. RTP. Test: 1 BO/ BW/ 5 mcfg. B/4 - 4 BO/ 1 BW/ 10 MCFG.

Additional Data:

T/Queen @ 3317'

T/Penrose @ 3464'

T/Grayburg Zone 1 @ 3651'

T/Grayburg Zone 2 @ 3684'

T/Grayburg Zone 2A @ 3714'

T/Grayburg Zone 3 @ 3744'

T/Grayburg Zone 4 @ 3775'

T/Grayburg Zone 5 @ 3820'

T/Grayburg Zone 6 @ 3857'

T/San Andres @ 3895'

KB @ 3540'

12-1/2" OD

50# CSG

Set @ 250' W/ 250 SX

Cmt circ.? Yes

TOC @ surf. by calc.

(17-1/2" hole)

8-5/8" OD 8rd

32# CSG

Set @ 1136' W/ 550 SX

Cmt circ.? No

TOC @ surf. by calc.

(11" hole)

5-1/2" OD 10rd


14# CSG

Set @ 3734' W/ 700 SX

Cmt circ.? No

TOC @ surf. by calc.

(7-7/8" hole)

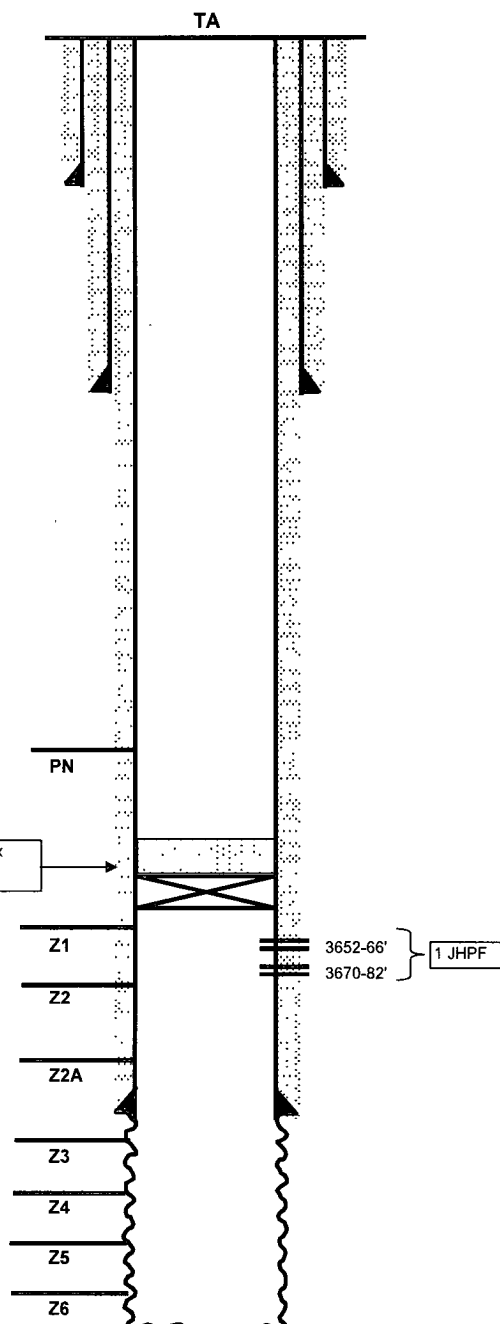

PBD: _____

TD: 3870'

FILE: EMSU151WB.XLS

WELL DATA SHEET

LEASE: EMSU WELL: 151
 LOC: 2310' F N L & 1650' F W L SEC: 32
 TOWNSHIP: 20S CNTY: Lea
 RANGE: 37E UNIT: F ST: NM
 (formerly, Turner State #3)

FORM: Grayburg / San Andres DATE
 GL: 3540' STATUS: SI Producer
 KB: 3540' API NO: 30-025-06317
 DF: CHEVNO: FA 74340 01

Date Completed: 11/37
 Initial Production: F/ 636 BOPD
 Initial Formation: Grayburg
 FROM: 3734' to 3843' / GOR 2740

Completion Data

8/37 ACDZ w/ 300 gals acid.

Subsequent Workover or Reconditioning:

1/52 Install pmg unit
 11/85 COWH. Log w/ CNL, CCL, GR, OH caliper. Acdz w/
 3500 gals 15% NeFe + 800# GRS. ISIP - vac. Swb dry -
 Rec'd 6 BW. SFL-3600'. EFL-3650'. Chem sqzd RIH w/ PE.
 Test 4 BO/ 16 BW/ 14 mcfg. B/4 - 6 BO/ 5 BW
 10/87 CO 5' fill. Deepen to 3870' Perf 3652-66, 3670-82'.
 Acdz w/ 1900 gals 15% NeFe HCL + 40 Bs. ISIP - 1800 psi.
 Swb - rec'd 28 BW. RTP Test 1 BO/ BW/ 5 mcfg B/4 - 4
 BO/ 1 BW/ 10 MCFG.

Additional Data:

T/Queen @ 3317'
 T/Penrose @ 3464'
 T/Grayburg Zone 1 @ 3651'
 T/Grayburg Zone 2 @ 3684'
 T/Grayburg Zone 2A @ 3714'
 T/Grayburg Zone 3 @ 3744'
 T/Grayburg Zone 4 @ 3775'
 T/Grayburg Zone 5 @ 3820'
 T/Grayburg Zone 6 @ 3857'
 T/San Andres @ 3895'
 KB @ 3540'

12-1/2" OD
 50# CSG
 Set @ 250' W/ 250 SX
 Cmt circ.? Yes
 TOC @ surf by calc
 (17-1/2" hole)

8-5/8" OD 8rd
 32# CSG
 Set @ 1136' W/ 550 SX
 Cmt circ.? No
 TOC @ surf by calc.
 (11" hole)


Cement Plug (300' - Surface)
 (52 sx)

Cement Plug (1210' - 1060')
 (25 sx)

Cement Plug (3480' - 3630')
 (25 sx)

Set CIBP @ 3630', Cap w/3 sx
 Class 'C' cmt

5-1/2" OD 10rd
 14# CSG
 Set @ 3734' W/ 700 SX
 Cmt circ.? No
 TOC @ surf by calc
 (7-7/8" hole)

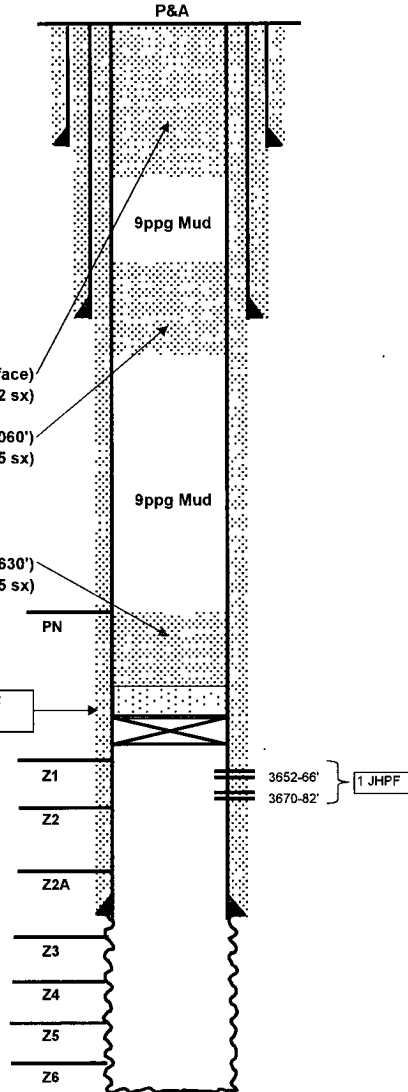

FILE: EMSU161WB.XLS