Form 3160-5 (August 2007)

UNITED STATES DEPARTMENT OF THE INTERIOR

BUREAU OF LAND MANAGEMENT

FORM APPROVED


OMB N Expires		
ace Serial No.	 	

Expires. July 31, 201
Lease Serial No
NMLC029405B

	UREAU OF LAND MANAGE	MENT	Expires	s. July 31, 2010
BUREAU OF LAND MANAGEMENT SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals OCD			5. Lease Serial No NMLC0294058	3
			C IEL-II All-	
abandoned we	II. Use form 3160-3 (APD)	for such proposals	6. If Indian, Allottee	of The Name
	PLICATE - Other instruction			eement, Name and/or No.
1. Type of Well ☐ Oil Well ☐ Gas Well ☐ Oth	ner /		8, Well Name and No RUBY FEDERA	
Name of Operator CONOCOPHILLIPS COMPAN	Contact: BF NY E-Mail. brian d.maiori	RIAN MAIORINGCEIVEL	9 API Well No. 30-025-40359	-00-X1
3a. Address 3300 N "A" ST BLDG 6 MIDLAND, TX 79705	. F	b Phone No (include area coo Ph: 432-688-6913	MALJAMAR	Yeso W
4 Location of Well (Footage, Sec., 7	., R., M., or Survey Description)	-	II. County or Parish	, and State
Sec 18 T17S R32E SESE 330	OFSL 330FEL		LEA COUNTY	, NM
12. CHECK APPI	ROPRIATE BOX(ES) TO I	NDICATE NATURE OF	NOTICE, REPORT, OR OTHI	ER DATA
TYPE OF SUBMISSION		TYPE	TYPE OF ACTION	
- Notice of Intent	☐ Acidize	Deepen	☐ Production (Start/Resume)	☐ Water Shut-Off
Notice of Intent	Alter Casing	Fracture Treat	Reclamation	☐ Well Integrity
☐ Subsequent Report	☐ Casing Repair	☐ New Construction	Recomplete	Other
Final Abandonment Notice	Change Plans	Plug and Abandon	Temporarily Abandon	Change to Original A
_	Convert to Injection	☐ Plug Back	☐ Water Disposal	10
following completion of the involved testing has been completed. Final Al determined that the site is ready for f ConocoPhillips Company resp Precision 194 Drilling Rig. Please see attached.	operations If the operation result bandonment Notices shall be filed final inspection.) pectfully request to change t	s in a multiple completion or nonly after all requirements, incl	BIA. Required subsequent reports shall becompletion in a new interval, a Form 3 luding reclamation, have been completed fold design for teh APPROVI BUREAU OF LAND M CARLSBAD FIELD	160-4 shall be filed once it, and the operator has
14. Thereby certify that the foregoing is	Electronic Submission #131	377 verified by the BLM WILLIPS COMPANY, sent to	/ell Information System	
	itted to AFMSS for processing	B by DEBORAH MCKINNE	on 02/23/2012 (12DLM0289SE)	
Name (Printed/Typed) BRIAN MA	AIORINO	Title AUTH	ORIZED REPRESENTATIVE	
Signature (Electronic S	Submission)	Date 02/22	/2012	·
	THIS SPACE FOR	FEDERAL OR STATE	OFFICE USE	
Approved By EDWARD FERNAN	DEZ	TitlePETROL	EUM ENGINEER	Date 02/23/201
Conditions of approval, if any, are attache ertify that the applicant holds legal or equivirient to conduct the applicant the applican	litable title to those rights in the su		KAS	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.


BLOWOUT PREVENTER ARRANGEMENT 3M System per Onshore Oil and Gas Order No. 2 utilizing 3M and 5M Rated Equipment

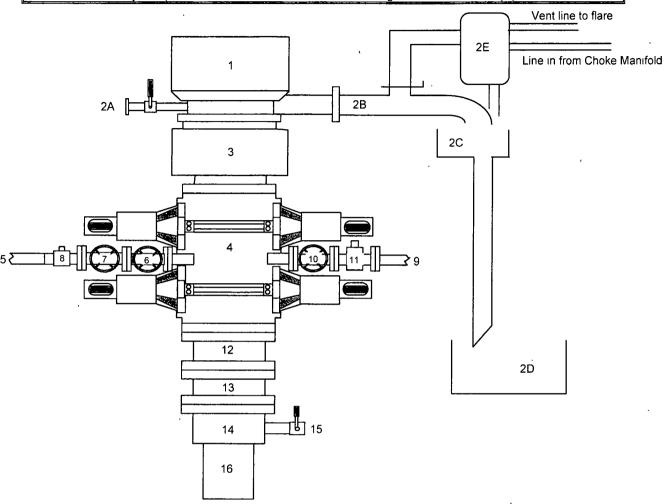

Item	Description
1	Rotating Head (11")
2A	Fill up Line and Valve
2B	Flow Line (8")
2C	Shale Shakers and Solids Settling Tank
2D	Cuttings Bins for Zero Discharge
2E	Rental Mud Gas Separator with vent line to flare and return line to mud system
3	Annular BOP (11", 3000 psi)
4	Double Ram BOP (11", 3000 psi, with Blind Rams in Upper Set and Pipe Rams in Lower Set)
5	Kill Line (2" Flexible Hose, 3000 psi WP)
6	Kill Line Valve, Inner (2-1/6" 3000 psi WP)
7	Kill Line Valve, Outer (2-1/16", 3000 psi WP)
8	Kıll Line Check Valve (2-1/16", 3000 psi WP
9	Choke Line (3" Steel Line, 3000 psi WP)
10	Choke Line Valve, Inner (3-1/8", 3000 psi WP)
11	Choke Line Valve, Outer, (Hydraulically operated, 3-1/8", 3000 psi WP
12	Spacer Spool (11" 3M x 3M)
13	Spacer Spool (11 3M x 5M)
14	Casing Head (11" 5M)
15	Ball Valve and Threaded Nipple on Casing Head Outlet, 2" 5M
16	Surface Casing

CHOKE MANIFOLD ARRANGEMENT

3M System per Onshore Oil and Gas Order No. 2 utilizing 3M and 5M Equipment

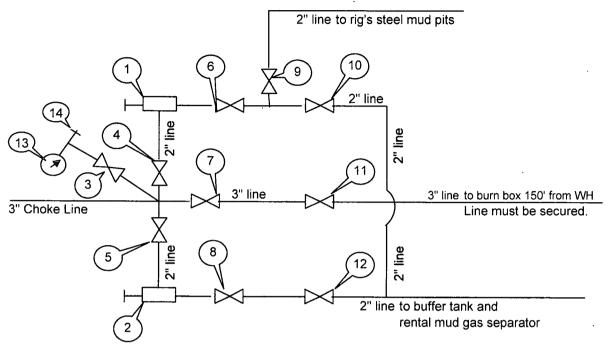

All Tees must be targeted

ltem	Description
------	-------------

- 1 Manual Adjustable Choke, 2-1/16", 3M
- 2 Manual Adjustable Choke, 2-1/16", 3M
- Gate Valve, 2-1/16" 5M 3
- Gate Valve, 2-1/16" 5M
- Gate Valve, 2-1/16" 5M
- Gate Valve, 2-1/16" 5M
- Gate Valve, 3-1/8" 3M
- 8 Gate Valve, 2-1/16" 5M
- 9 Gate Valve, 2-1/16" 5M
- 10 Gate Valve, 2-1/16" 5M
- 11 Gate Valve, 3-1/8" 3M
- 12
- Gate Valve, 2-1/16" 5M 13 Pressure Gauge
- 14 2" hammer union tie-in point for BOP Tester

We will test each valve to 3000 psi from the upstream side.

Drawn by

Steven O. Moore

Chief Drilling Engineer, Mid-Continent Business Unit, ConocoPhillips Company

Date: 07-Feb-2012