Yates Petroleum Corporation

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- 1. The hazards and characteristics of hydrogen sulfide (H2S).
- 2. The proper use and maintenance of personal protective equipment and life support systems.
- 3. The proper use of H2S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- 4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- 1. The effects of H2S on metal components. If high tensile tubular are to be used, personnel well be trained in their special maintenance requirements.
- 2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- 3. The contents and requirements of the H2S Drilling Operations Plan and H2S Contingency Plan.

There will be an initial training session just prior to encountering a known or probable H2S zone (within 3 days or 500 feet) and weekly H2S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H2S Drilling Operation Plan and the H2S Contingency Plan. The location of this well does not require a Public Protection Plan.

II. H2S SAFETY EQUIPMENT AND SYSTEMS

NOTE: All H2S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H2S.

1. Well Control Equipment:

- A. Flare line
- B. Choke manifold
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer & rotating head.

2. Protective equipment for essential personnel:

A. Mark II Survive Air (or equivalent) 30-minute units located in the doghouse and at briefing areas, as indicated on well site diagram.

3. H2S detection and monitoring equipment:

A. 3 portable H2S monitors positioned at: Shale Shaker, Bell Nipple, and Rig Floor. These units have warning lights and audible sirens when H2S levels of 10 PPM are reached.

4. Visual warning systems:

- A. Wind direction indicators as shown on well site diagram (attached).
- B. Caution/Danger signs (attached) shall be posted on roads providing direct access to location. Signs will be painted with high visibility yellow with black lettering of a sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.

5. Mud program:

A. The mud program has been designed to minimize the volume of H2S circulated to the surface. Proper mud weight, safe drilling practices and the use of H2S scavengers will minimize hazards when penetrating H2S bearing zones.

6. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- B. All elastomers used for packing and seals shall be H2S trim.

H2S Plan Page 2

7. Communication:

- A. Cellular communications in company vehicles.
- B. Land line (telephone) communication at the Office.

8. Well testing:

A. There will be no drill stem testing.

EXHIBIT

DANGER

POISONS GAS

HYDROGEN SULFIDE



CAUTION POTENTIAL DANGER

(YELLOW)

DANGER POISONS GAS ENCOUNTERED (RED) AUTHORIZED PERSONAL ONLY.
LOCATION SECURED.

1-575-746-1096 1-877-879-8899

EDDY COUNTY EMERGENCY NUMBERS ARTESIA FIRE DEPT. 575-746-5050 ARTESIA POLICE DEPT. 575-746-5000 EDDY CO. SHERIFF DEPT. 575-746-9888 LEA COUNTY EMERGENCY NUMBERS HOBBS FIRE DEPT. 575-397-9308 HOBBS POLICE DEPT. 575-397-9285 LEA CO. SHERIFF DEPT. 575-396-1196


H2S Plan Page 3

Yates Petroleum Corporation 105 S. Fourth Street Artesia, NM 88210

Hydrogen Sulfide (H₂S) Contingency Plan

For

Taipan BST State #1H 175' FNL & 2200' FWL Section 31, T24S-R33E Lea County NM

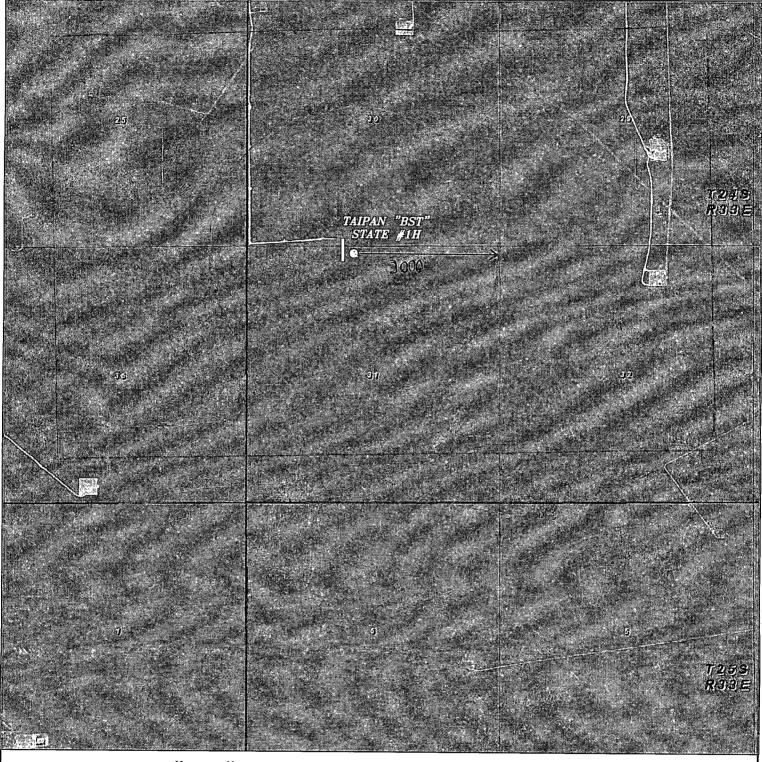

TAIPAN "BST" STATE #1H Located 175' FNL and 2200' FWL Section 31, Township 24 South, Range 33 East, N.M.P.M., Lea County, New Mexico.



P.O. Box 1786 1120 N. West County Rd. Hobbs, New Mexico 88241 (575) 393—7316 — Office (575) 392—2206 — Fax basinsurveys.com

W.O. Number: JMS 26126


Scale: 1" = 2000'


YELLOW TINT - USA LAND
BLUE TINT - STATE LAND
NATURAL COLOR - FEE LAND

YATES PETROLEUM CORP.

Taipan BST State #1H

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H₂S, including warning signs, wind indicators and H₂S monitor.



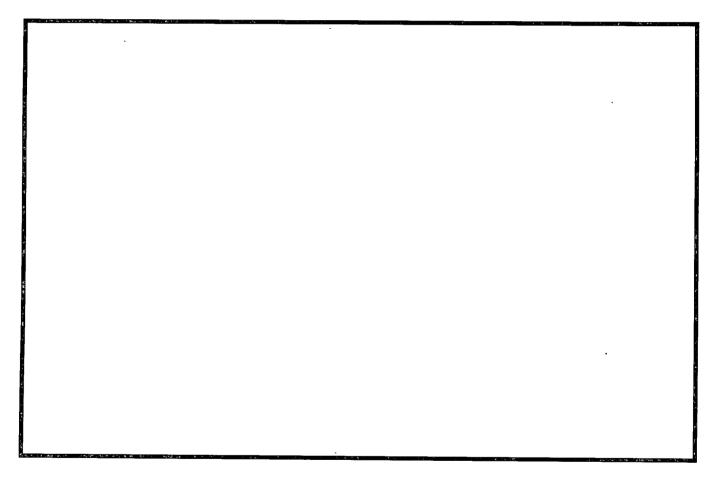

Assumed 100 ppm ROE = 3000' 100 ppm H2S concentration shall trigger activation of this plan.

Emergency Procedures

In the case of a release of gas containing H₂S, the first responder(s) must isolate the area and prevent entry by other persons into the 100 ppm ROE. Additionally the first responder(s) must evacuate any public places encompassed by the 100 ppm ROE. First responder(s) must take care not to injure themselves during this operation. Company and/or local officials must be contacted to aid in this operation. Evacuation of the public should be beyond the 100 ppm ROE.

All responders must have training in the detection of H₂S, measures for protection against the gas, equipment used for protection and emergency response. Additionally, responders must be equipped with H₂S monitors and air packs in order to control the release. Use the "buddy system" to ensure no injuries during the response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentr- ation
Hydrogen Sulfide	H ₂ S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

YPC personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. YPC Company response must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

Yates Petroleum Corporation Phone Numbers

Tutes Tetroteum Corporation I none Numbers	නී ලිද ^{ා ක} ර ගමන කාරකෙක් සිටිමේ සිම සිමා සුර
YPC Office	
Wade Bennett/Prod Superintendent	
LeeRoy Richards/Assistant Prod Superintendent	(575) 748-4228
Mike Larkin/Drilling	` /
Paul Hanes/Prod. Foreman/Roswell	` '
Tim Bussell/Drilling Superintendent	
Artesia Answering Service	
(During non-office hours)	
Agency Call List	
Eddy County (575)	
Artesia	
State Police	
City Police	746-2703
Sheriff's Office	
Ambulance	911
Fire Department	746-2701
LEPC (Local Emergency Planning Committee)	746-2122
NMOCD	748-1283
Carlsbad	
State Police	
City Police	
Sheriff's Office	
Ambulance	
Fire Department	
LEPC (Local Emergency Planning Committee)	887-3798
US Bureau of Land Management	887-6544
New Mexico Emergency Response Commission (Santa Fe)	
24 HR	(505) 827-9126
New Mexico State Emergency Operations Center	(505) 476-9635
National Emergency Response Center (Washington, DC)	(800) 424-8802
Other	
Boots & Coots IWC1-800-256-9688 or (281) 931-8884	
Cudd Pressure Control(915) 699-0139 or (915) 563-3356	
Halliburton(575) 746-2757	
3. J. Services(575) 746-3569	
Flight For Life -4000 24th St, Lubbock, TX(80	06) 743-9911
Aerocare -Rr 3 Box 49f , Lubbock, TX(8)	06) 747-8923
Med Flight Air Amb 2301 Yale Blvd SE #D3, Albuq, NM(50	05) 842-4433
S.B. Air Med Svc 2505 Clark Carr Loon SE. Albug, NM. (50	5) 940 4040

S B Air Med Svc 2505 Clark Carr Loop SE, Albuq, NM(505) 842-4949