

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-12185
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name T. R. Andrews
8. Well Number: 4
9. OGRID Number: 4323
10. Pool name or Wildcat Paddock, South

SUNDRY SERVICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other Water Injection	
2. Name of Operator Chevron U.S.A. INC.	
3. Address of Operator 15 Smith Road Midland, TX 79705	
4. Well Location Unit Letter O : 990 feet from the South line and 1920 feet from the East line Section 32 Township 22-S Range 38-E NMPM County Lea	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3407' GL	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-6000' PB-5150' PERFS-5554'-5754', 5202'-5226' CIBP-5150'
9-5/8" 32.30# csg @ 1354' w/710 sx 12-1/4" hole, TOC Surf
7" 23# & 26# csg @ 5999' w/715 sx, 8-3/4" hole, TOC 2825'

1. MIRUWSU. NDWH. NUBOP.
2. TAG CIBP @ 5150'.

3B 3A Pressure Test casing to 500 psi and record/report findings.

4. Spot 30 sx of C cement 4158' CTOC.
5. Spot 30 sx of C cement 3585' CTOC.
6. P&S 50 sx of C cement 1454' CTOC. WOC & TAG @ 2154' PERFS 50 Cmt to SURFACE (9 5/8" x 7" & 7")
7. Perf & Circulate 50 sx of C cement 20' Surface. NOTE: THIS WELL IS IN R-5003 AREA.
8. Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE

Representative

DATE

07/9/12

Type or print name

Matthew Brewer

E-mail address:

mbrewer01@keyenergy.com

PHONE:

432-523-5155

For State Use Only

APPROVED BY:

TITLE

Dist. MGR

DATE

7-17-2012

Conditions of Approval (if any):

JUL 17 2012

THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS

T.R. Andrews # 4

Location:

Unit Letter: O
990' FSL & 1920' FEL
Section: 32
Township: 22S
Range: 38E
County: Lea State: NM

Currently TA'd Wellbore Diagram

OPERATOR: Chevron
API No 30-025-12185
Chevno: EO1466
Spud Date: 10/28/1959
Compl. Date: 11/29/1959

Elevations:

GL: 3407'
KB:
DF:

Log Formation Tops	
T. Salt	
B. Salt	
Yates	2654'
Seven Rivers	
Queens	3482'
San Andres	4058'
Glorieta	5220'
Tubb	
Drinkard	

Surface Csg: 9-5/8" 32.30# H-40 SS Csg
Set: @ 1354' w/710 sxs cmt
Hole Size: 12-1/4"
Circ: yes TOC: Surf.
TOC By: Circulation

TOC @ 2825'

This wellbore diagram is based on the most recent information regarding wellbore configuration and equipment that could be found in the Midland Office well files and computer databases as of the update date below. Verify what is in the hole with the well file in the Eunice Field Office. Discuss w/WEO Engineer, WEO Rep, OS, ALS & FS prior to rigging up on well regarding any hazards or unknown issues pertaining to the well.

CIPB @ 5150'
Circ w/ 200 Bbls Pkr FI

10/97 - Spot 35' cmt on top of Pkr.


S Paddock Perfs 28 holes over 24'
5202'-12'
5224'-26'

Model D Pkr @ 5320'
w/DR Plug & 3-11/12" collar UP

Blinbry Perfs: 4 JHPF, 96 holes, over 200'
5554'-56'
5586'-88'
5603'-05'
5621'-23'
5662'-64'
5673'-75'
5688'-90'
5700'-02'
5710'-12'
5934'-36'
5746'-48'
5752'-54'

Prod. Csg: 7" 23# & 26# N-80, J-55
Set: @ 5999' w/ 715 sxs cmt
Hole Size: 8-3/4"
Circ: No TOC: 2825'
TOC By: TS

By: chay
PBTd: 5150'
TD: 6000'

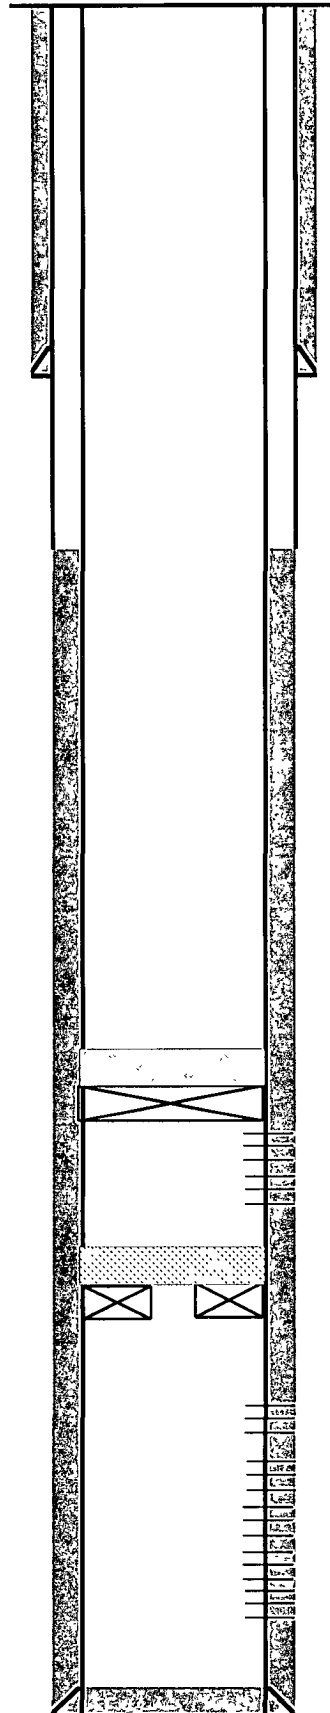

T.R. Andrews # 4

Location:

Unit Letter: O
990' FSL & 1920' FEL
Section: 32
Township: 22S
Range: 38E
County: Lea State: NM

Elevations:

GL: 3407'
KB:
DF:

Log Formation Tops

T. Salt	
B. Salt	
Yates	2654'
Seven Rivers	
Queens	3482'
San Andres	4058'
Glorieta	5220'
Tubb	
Drinkard	

PROPOSED

Currently TA'd Wellbore Diagram

~~Perf & Circ
50sx 38"
surface~~

~~P&S 50sx @
1454'
WOC/TAG~~

~~P&S 50sx @
2754'~~

Set 30sx @
3582'

Set 30sx @
4158'

Circ. MLF
RIH TAG CIBP
@ 5150'

Cap w/ 35' cmt
CIBP @ 5150'
Circ w/ 200 Bbls Pkr FI

OPERATOR: Chevron
API No. 30-025-12185
Chevno: EO1466
Spud Date: 10/28/1959
Compl. Date: 11/29/1959

Surface Csg: 9-5/8" 32.30# H-40 SS Csg
Set: @ 1354' w/710 sxs cmt
Hole Size: 12-1/4"
Circ: yes TOC: Surf
TOC By: Circulation

@ 2754'
Perf & SQ Cmt to surface
*9 5/8" x 7" #7" * NOTE **
THIS WELL IS IN
R-5003 AREA

TOC @ 2825'

This wellbore diagram is based on the most recent information regarding wellbore configuration and equipment that could be found in the Midland Office well files and computer databases as of the update date below. Verify what is in the hole with the well file in the Eunice Field Office. Discuss w/ WEO Engineer, WQ Rep, OS, ALS & FS prior to rigging up on well regarding any hazards or unknown issues pertaining to the well.

S Paddock Perfs 28 holes over 24'
5202'-12'
5224'-26'

Model D Pkr @ 5320'
w/DR Plug & 3-11/12" collar UP

Blincbry Perfs: 4 JHPF, 96 holes, over 200'
5554'-56'
5586'-88'
5603'-05'
5621'-23'
5662'-64'
5673'-75'
5688'-90'
5700'-02'
5710'-12'
5934'-36'
5746'-48'
5752'-54'

Prod. Csg: 7" 23# & 26# N-80, J-55
Set: @ 5999' w/ 715 sxs cmt
Hole Size: 8-3/4"
Circ: No TOC: 2825'
TOC By: TS

10/97 - Spot 35' cmt on top of Pkr

By: chay
PBTD: 5150'
TD: 6000'

