

Submit 3 Copies To Appropriate District Office  
District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
May 27, 2004

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO.	30-041-10597
5. Indicate Type of Lease	STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.	OG 1395
7. Lease Name or Unit Agreement Name	Todd Lower San Andres Unit
8. Well Number	#359
9. OGRID Number	227001
10. Pool name or Wildcat	Todd; Lower San Andres (Assoc)

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other ☐

2. Name of Operator  
Latigo Petroleum, Inc.

3. Address of Operator 550 W. Texas, Suite 700  
Midland, TX 79701

4. Well Location  
Unit Letter I : 1980' feet from the South line and 660' feet from the East line  
Section 35 Township 7S Range 35E NMPM County Roosevelt

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
4178'

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type Steel Depth to Groundwater                      Distance from nearest fresh water well                      Distance from nearest surface water                     

Pit Liner Thickness:                      mil Below-Grade Tank: Volume                      bbls; Construction Material Steel

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: ☐


SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) Cap CIBP @ 4100' w/35' cmt
- 2) Circulate hole w/mud laden fluid, test csg to 500#.
- 3) Spot 25 sx cmt @ ~~2100'~~ 2280' - 1957' B.O.S + T.O.S.
- 4) Perf csg @ 350', squeeze w/50 sx cmt. Displace to 287'. POH, WOC. Tag plug.
- 5) Spot 10 sx cmt. @ 100' to surface.
- 6) RDMO. Cut off wellhead & anchors, install dry hole marker & clean location.

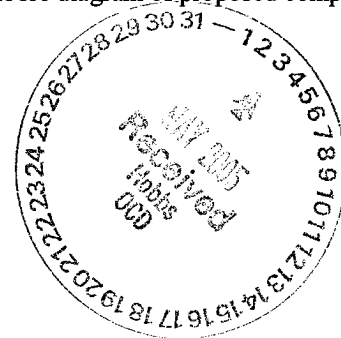

THE OIL CONSERVATION DIVISION MUST  
BE NOTIFIED 24 HOURS PRIOR TO THE  
BEGINNING OF PLUGGING OPERATIONS.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☒, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Donna Huddleston TITLE Production Analyst DATE 05/02/2005

Type or print name Donna Huddleston

For State Use Only

E-mail address: dhuddleston@latigopetro.com Telephone No. (432)684-4293

APPROVED BY: Larry W. Wink TITLE OCD FIELD REPRESENTATIVE II/STAFF MANAGER DATE MAY 05 2005

Conditions of Approval (if any):

# Todd Lower SA Unit #359

1980' FSL & 660' FEL

Sec 35, T7S, R35E

Todd Lwr SA Assoc Pool


Roosevelt County, New Mexico

API NO. 30-041-10597

GL Elev 4178'

Spudded 7/66  
Completed 6/66  
Originally drld as  
New Mexico CT State #5

12/66 - SI well  
6/90 - Convert TA well to WIW  
RIH w/134 jts sealtite  
tbg, pkr set @ 4245', PWOI  
4/02 - Laid down tbg, load csg,  
tried to test, RDMO

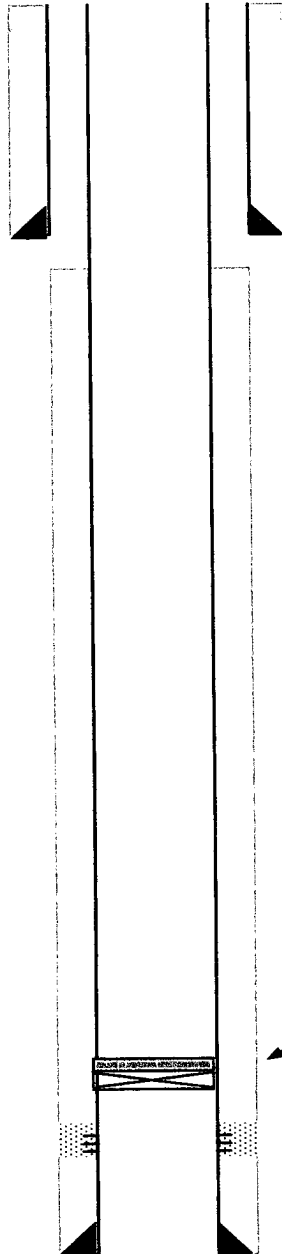

9 5/8" Hole

7-5/8" 15.28# Csg @337'  
Cmt'd w/200 sx, Circ cmt

6-3/4" Hole

Set CIBP @ 4100'

Perfs sqz'd w/100sk Vis-squeeze  
treated w/1000 gals lease  
crude w/3 gals emulsion breaker

Perfs 4286'-4309' 1 JSPF, notch csg  
@ 4286' & acdz w/250 gals 15% BDA  
Acadz w/500 gals 15% BDA acid  
Max Pressure 1300#  
4-1/2" 9.5# J-55 csg @ 4350'  
Cmt'd w/500 sx, Plug @ 4317'  
TOC @ 374' by calc (50% excess)

PBTD 4317'  
TD 4350'