

ATS-12-886

HOBBS OCD

SEP 20 2012

Form 3160-3
(April 2004)

OCD RECEIVED

FORM APPROVED
OMB No 1004-0137
Expires March 31, 2007

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a Type of Work ☒ DRILL ☐ REENTER		5 Lease Serial No NMNM127894
1b Type of Well ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone		6. If Indian, Allottee or Tribe Name
2 Name of Operator Cimarex Energy Co.		7. If Unit or CA Agreement, Name and No.
3a Address 600 N. Marienfeld St., Ste. 600; Midland, TX 79701		8. Lease Name and Well No Diamondtail 23 Federal No. 6 39458
3b. Phone No (include area code) 432-571-7800		9. API Well No 30-025- 40772
4 Location of Well (Report location clearly and in accordance with any State requirements *) At Surface 330 FNL & 1905 FEL Unit B At proposed prod. Zone 330 FSL & 1650 FEL Unit A Horizontal Bone Spring test		10 Field and Pool, or Exploratory Diamondtail; Bone Spring
14. Distance in miles and direction from nearest town or post office*		11. Sec, T R M. or Blk and Survey or Area 23-23S-32E
15 Distance from proposed* location to nearest property or lease line, ft (Also to nearest drig. unit line if any) 330'	16 No of acres in lease 640	12 County or Parish Lea
18 Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft 150'	19. Proposed Depth MD 14098' TVD 9675'	13 State NM
20. BLM/BIA Bond No. on File COB000011	17. Spacing Unit dedicated to this well W2E2 160 acres	
21 Elevations (Show whether DF, KDB, RT, GL, etc) 3724' GR	22 Approximate date work will start* 12.01.12	23 Estimated duration 30-35 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No 1, shall be attached to this form

- | | |
|---|---|
| 1 Well plat certified by a registered surveyor | 4 Bond to cover the operations unless covered by an existing bond on file (see Item 20 above) |
| 2 A Drilling Plan | 5. Operator Certification |
| 3 A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office) | 6 Such other site specific information and/or plans as may be required by the authorized officer. |

25 Signature Zeno Farris	Name (Printed/Typed) Zeno Farris	Date 06.26.12
---------------------------------	-------------------------------------	------------------

Title

Manager Operations Administration

Approved By (Signature) /s/ Don Peterson	Name (Printed/Typed) /s/ Don Peterson	Date SEP 18 2012
Title FIELD MANAGER	Office CARLSBAD FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon

Conditions of approval, if any, are attached

APPROVAL FOR TWO YEARS

Title 18 U S S Section 1001 and Title 43 U S C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction

*(Instructions on page 2)

Carlsbad Controlled Water Basin

Ka 09/24/12

Approval Subject to General Requirements
& Special Stipulations Attached

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**
SEP 25 2012

Drilling Plan
Diamondtail 23 Federal 6
 Cimarex Energy Co.
 Unit B, Section 23
 T23S-R32E; Lea County, NM

In response to questions asked under Section II B of Bulletin NTL-6, the following information is provided for your consideration:

- 1 **Location:** SHL 330 FNL & 1905 FEL
 BHL 330 FSL & 1650 FEL

- 2 **Elevation above sea level:** 3724' GR

- 3 **Geologic name of surface formation:** Quaternary Alluvium Deposits

- 4 **Drilling tools and associated equipment:** Conventional rotary drilling rig using fluid as a circulating medium for solids removal.

- 5 **Proposed drilling depth:** MD 14098' TVD 9675'

- 6 **Estimated tops of geological markers:**

Rustler	1200
T. Salt	1520
Castille	3590
B. Salt	4680
Lamar	4960
Delaware	4980
Cherry Canyon	5900
Brushy Canyon	7200
Basal Brushy Canyon	8470
Bone Spring	8750
Avalon Shale	9430

- 7 **Possible mineral bearing formations:**

Bone Spring	Oil
Avalon Shale	Oil

8 **Proposed Mud Circulating System:**

Depth	Mud Wt	Visc	Fluid Loss	Type Mud
0' to 1225' 1340	8.4 - 8.6	28	NC	FW
1225' to 4900'	10.0	30-32	NC	Brine water
4900' to 14098'	8.4	30-32	NC	2% KCL

Sufficient mud materials will be kept on location at all times in order to combat lost circulation or unexpected kicks. In order to run DSTs, open hole logs, and casing, the viscosity and water loss may have to be adjusted in order to meet these needs.

Proposed Drilling Plan

Drill 8¾" hole to 9198'. Drill 8¾" lateral through the curve to TD @ 14098' MD, 9675' TVD. Run 5½" 17# P-110 LTC from 0-14098' and cement.

Drilling Plan
Diamondtail 23 Federal 6
 Cimarex Energy Co.
 Unit B, Section 23
 T23S-R32E; Lea County, NM

9 Casing & Cementing Program:

See COA

String	Hole Size	Depth	Casing OD	Weight	Collar	Grade
Surface	17 1/2"	0' to 1225'	New 13 3/8"	48#	STC	H-40
Intermediate	12 1/4"	0' to 4900'	New 9 5/8"	40#	LTC	J-55
Production	7 7/8"	0' to 14098'	New 5 1/2"	17#	LTC	P-110

10 Cementing:

Surface

Lead: 810SKS Premium Plus + 2% CaCl 4% gel 13.5ppg 1.75 yield 115% Excess

Tail: 200SKS Premium Plus + 2% CaCl 14.8ppg 1.34 yield 10% Excess

TOC Surface Centralizers per Onshorder 2.III.B.1.f

Intermediate

Lead: 1555SKS HLPP + 5% Salt + 5# Gilsontite 12.9ppg 1.92 yield 120% Excess

Tail: 235SKS Premium Plus + 1% CaCl 14.8ppg 1.34 yield 0% Excess

TOC Surface

Production

Lead: 835SKS Econocem H + 0.5/10% HR-601 0.5/10% Halad-322 11.9ppg 2.48 yield 53% Excess

Tail: 1385SKS Versacem H + 0.5% Halad(R)-344 + 0.4% CFR-3 + 1# Salt + 0.2% HR-601 14.5ppg 1.22 yield 25% Excess

TOC 3600' Centralizers every 3rd joint through the curve or legal location hardline to provide adequate cement coverage every 100' unless hole conditions require greater spacing between centralizers.

Depth to ground water is 475' according to the State Engineer. Fresh water zones will be protected by setting 13 3/8" casing at 1225' and cementing to surface and 9 5/8" casing at 4900' and cementing to surface. Hydrocarbon zones will be protected by setting 5 1/2" casing at 14098' and cementing to 3600'.

<u>Collapse Factor</u>	<u>Burst Factor</u>	<u>Tension Factor</u>
1.125	1.125	1.6

11 Pressure control Equipment:

Exhibit "E". A 13 3/8" 5000 psi working pressure B.O.P. tested to 3000 psi consisting of one set of blind rams and one set of pipe rams and a 5000# annular type preventer. A choke manifold and 120 gallon accumulator with floor and remote operating stations and auxiliary power system. Rotating head below 6000'. A kelly cock will be installed and maintained in operable condition and a drill string safety valve in the open position will be available on the rig floor. Mud gas separator will be installed before drilling out of surface casing.

BOP unit will be hydraulically operated. BOP will be nipped up and operated at least once a day while drilling and the blind rams will be operated when out of hole during trips. No abnormal pressure or temperature is expected while drilling. From the base of the surface pipe through the running of production casing, the well will be equipped with a 5000 psi BOP system tested to 3000 psi.

BOP's will be tested to 250 psi low and 3000 psi high by an independent service company. Hydril will be tested to 250 psi low and 1500 psi high.

Cimarex Energy Co. of Colorado requests a variance to drill this well to using a co-flex line between the BOP and choke manifold.

Manufacturer: Midwest Hose & Specialty

Serial Number 59473

Length: 35' Size: 4-1/16" Ends - flanges/clamps

WP rating: 10,000 psi Anchors required by manufacturer - Yes/No

Drilling Plan
Diamondtail 23 Federal 6
Cimarex Energy Co.
Unit B, Section 23
T23S-R32E; Lea County, NM

12 Testing, Logging and Coring Program: *See COA*

- A. Mud logging program: 2 man unit from 4900 to TD
- B. Electric logging program: CNL / LDT / CAL / GR, DLL / CAL / GR surface to TD
- C. No DSTs or cores are planned at this time.

13 Potential Hazards:

No abnormal pressures or temperatures are expected. In accordance with Onshore Order 6, Cimarex does not anticipate that there will be enough H₂S from the surface to the Bone Spring formations to meet the BLM's minimum requirements for the submission of an "H₂S Drilling Operation Plan" or "Public Protection Plan" for the drilling and completion of this well. Since we have an H₂S Safety package on all wells, attached is an "H₂S Drilling Operations Plan." Adequate flare lines will be installed off the mud / gas separator where gas may be flared safely. All personnel will be familiar with all aspects of safe operation of equipment being used.

Estimated BHP **4350 psi** Estimated BHT **130°**

14 Road and location construction will begin after BLM approval of APD. Anticipated spud date as soon as approved.

Drilling expected to take 30-35 days

If production casing is run an additional 30 days will be required to complete and construct surface facilities.

15 Other Facets of Operations:

After running casing, cased hole gamma ray neutron collar logs will be run from total depth over possible pay intervals.

Bone Spring pay will be perforated and stimulated.


The proposed well will be tested and potentialized as **an oil well.**



Cimarex Energy Co.

Location: Lea County, NM
Field: (Diamondtail) Sec 23, T23S, R32E
Facility: Diamondtail 23 Federal No.6

Slot: No.6 SHL
Well: No 6
Wellbore: No 6 PWB

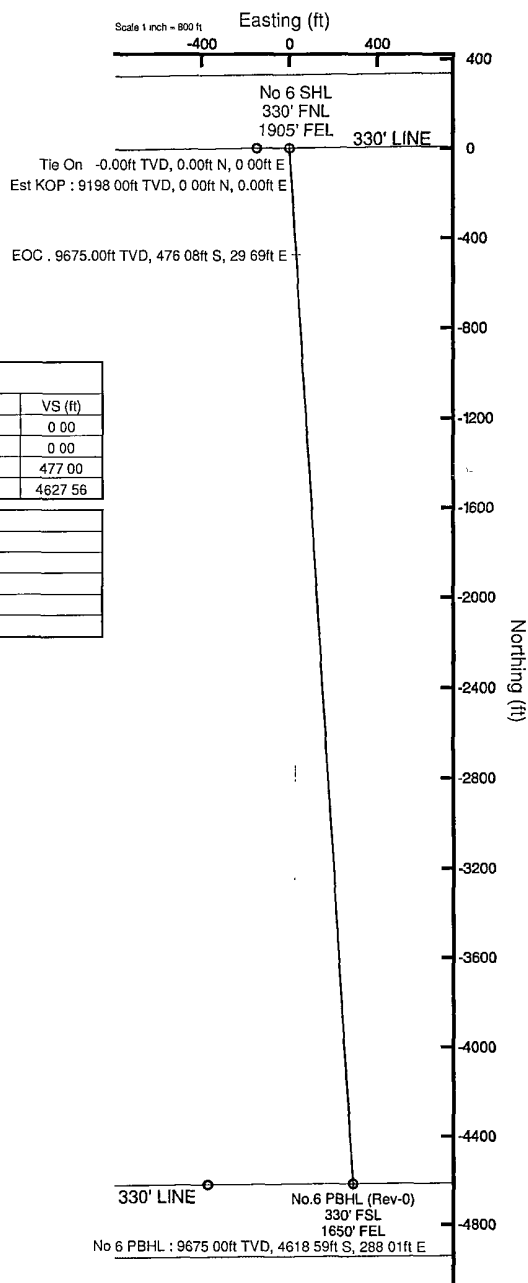

Well Profile Data

Design Comment	MD (ft)	Inc (°)	Az (°)	TVD (ft)	Local N (ft)	Local E (ft)	DLS (°/100ft)	VS (ft)
Tie On	0.00	0.000	176.432	0.00	0.00	0.00	0.00	0.00
Est KOP	9198.00	0.000	176.432	9198.00	0.00	0.00	0.00	0.00
EOC	9947.27	90.000	176.432	9675.00	-476.08	29.69	12.01	477.00
No 6 PBHL	14097.83	90.000	176.432	9675.00	-4618.59	288.01	0.00	4627.56

Plot reference wellpath is Rev-A 0


True vertical depths are referenced to Rig on No 6 SHL (RT) Grid System NAD83 / TM New Mexico SP, Eastern Zone (3001), US feet

Measured depths are referenced to Rig on No 6 SHL (RT) North Reference Grid north


Rig on No 6 SHL (RT) to Mean Sea Level -3724 feet Scale True distance

Mean Sea Level to Mud line (At Slot No 6 SHL) -3724 feet Depths are in feet

Coordinates are in feet referenced to Slot Created by gentbry on 4/12/2012



BGGM (1945 0 to 2013 0) Dp 60.18° Field 48571.6 nT
Magnetic North is 7.60 degrees East of True North (at 4/12/2012)
Grid North is 0.57 degrees East of True North
To correct azimuth from True to Grid subtract 0.57 degrees
To correct azimuth from Magnetic to Grid add 7.23 degrees
For example if the Magnetic North Azimuth = 90 degs, then the Grid North Azimuth = 90 + 7.23 = 97.23

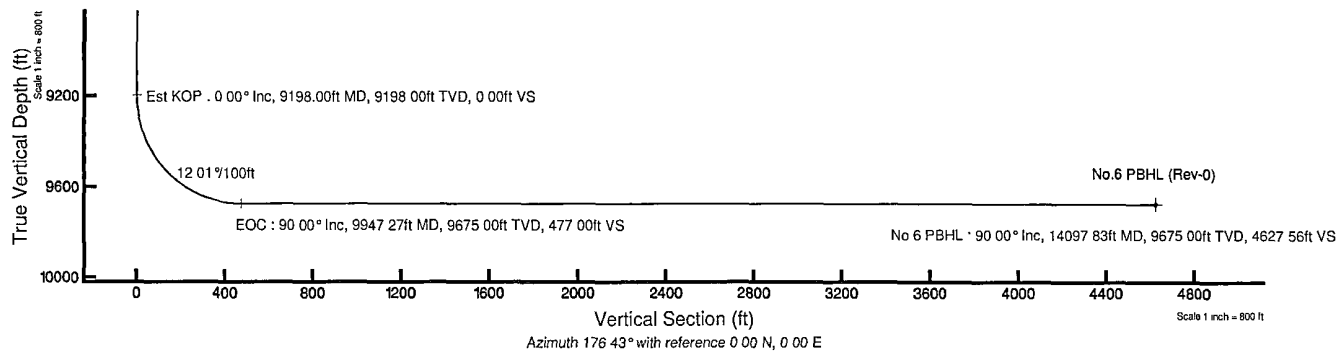



Planned Wellpath Report

Rev-A.0
Page 1 of 5



REFERENCE WELLPATH IDENTIFICATION			
Operator	Cimarex Energy Co.	Slot	No.6 SHL
Area	Lea County, NM	Well	No.6
Field	(Diamondtail) Sec 23, T23S, R32E	Wellbore	No.6 PWB
Facility	Diamondtail 23 Federal No.6		

REPORT SETUP INFORMATION			
Projection System	NAD83 / TM New Mexico SP, Eastern Zone (3001), US feet	Software System	WellArchitect® 3.0.0
North Reference	Grid	User	Gentbry
Scale	0.999961	Report Generated	4/12/2012 at 2:40:59 PM
Convergence at slot	0.37° East	Database/Source file	WA Midland/No.6_PWB.xml

WELLPATH LOCATION						
	Local coordinates		Grid coordinates		Geographic coordinates	
	North[ft]	East[ft]	Easting[US ft]	Northing[US ft]	Latitude	Longitude
Slot Location	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W
Facility Reference Pt			754631.30	472314.30	32°17'47.682"N	103°38'34.938"W
Field Reference Pt			753067.10	472297.00	32°17'47.610"N	103°38'53.162"W

WELLPATH DATUM			
Calculation method	Minimum curvature	Rig on No.6 SHL (RT) to Facility Vertical Datum	0.00ft
Horizontal Reference Pt	Slot	Rig on No.6 SHL (RT) to Mean Sea Level	3724.00ft
Vertical Reference Pt	Rig on No.6 SHL (RT)	Rig on No.6 SHL (RT) to Mud Line at Slot (No.6 SHL)	0.00ft
MD Reference Pt	Rig on No.6 SHL (RT)	Section Origin	N 0.00, E 0.00 ft
Field Vertical Reference	Mean Sea Level	Section Azimuth	176.43°



Planned Wellpath Report

Rev-A.0
Page 2 of 5



REFERENCE WELLPATH IDENTIFICATION

Operator	Cimarex Energy Co.	Slot	No.6 SHL
Area	Lea County, NM	Well	No.6
Field	(Diamondtail) Sec 23, T23S, R32E	Wellbore	No.6 PWB
Facility	Diamondtail 23 Federal No.6		

WELLPATH DATA (151 stations) † = interpolated/extrapolated station

MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	Grid East [US ft]	Grid North [US ft]	Latitude	Longitude	DLS [°/100ft]	Comments
0.00	0.000	176.432	0.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	Tie On
100.00†	0.000	176.432	100.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
200.00†	0.000	176.432	200.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
300.00†	0.000	176.432	300.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
400.00†	0.000	176.432	400.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
500.00†	0.000	176.432	500.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
600.00†	0.000	176.432	600.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
700.00†	0.000	176.432	700.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
800.00†	0.000	176.432	800.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
900.00†	0.000	176.432	900.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
1000.00†	0.000	176.432	1000.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
1100.00†	0.000	176.432	1100.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
1200.00†	0.000	176.432	1200.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
1220.00†	0.000	176.432	1220.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	Rustler
1300.00†	0.000	176.432	1300.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
1400.00†	0.000	176.432	1400.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
1500.00†	0.000	176.432	1500.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
1520.00†	0.000	176.432	1520.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	Salt
1600.00†	0.000	176.432	1600.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
1700.00†	0.000	176.432	1700.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
1800.00†	0.000	176.432	1800.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
1900.00†	0.000	176.432	1900.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
2000.00†	0.000	176.432	2000.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
2100.00†	0.000	176.432	2100.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
2200.00†	0.000	176.432	2200.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
2300.00†	0.000	176.432	2300.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
2400.00†	0.000	176.432	2400.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
2500.00†	0.000	176.432	2500.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
2600.00†	0.000	176.432	2600.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
2700.00†	0.000	176.432	2700.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
2800.00†	0.000	176.432	2800.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
2900.00†	0.000	176.432	2900.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
3000.00†	0.000	176.432	3000.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
3100.00†	0.000	176.432	3100.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
3200.00†	0.000	176.432	3200.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
3300.00†	0.000	176.432	3300.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
3400.00†	0.000	176.432	3400.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
3500.00†	0.000	176.432	3500.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
3590.00†	0.000	176.432	3590.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	Castille
3600.00†	0.000	176.432	3600.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
3700.00†	0.000	176.432	3700.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
3800.00†	0.000	176.432	3800.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
3900.00†	0.000	176.432	3900.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
4000.00†	0.000	176.432	4000.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
4100.00†	0.000	176.432	4100.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	



Planned Wellpath Report

Rev-A.0
Page 3 of 5



REFERENCE WELLPATH IDENTIFICATION			
Operator	Cimarex Energy Co.	Slot	No.6 SHL
Area	Lea County, NM	Well	No.6
Field	(Diamondtail) Sec 23, T23S, R32E	Wellbore	No.6 PWB
Facility	Diamondtail 23 Federal No.6		

WELLPATH DATA (151 stations) · † = interpolated/extrapolated station												
MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	Grid East [US ft]	Grid North [US ft]	Latitude	Longitude	DLS [°/100ft]	Comments
4200.00†	0.000	176.432	4200.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
4300.00†	0.000	176.432	4300.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
4400.00†	0.000	176.432	4400.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
4500.00†	0.000	176.432	4500.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
4600.00†	0.000	176.432	4600.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
4680.00†	0.000	176.432	4680.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	Base Salt
4700.00†	0.000	176.432	4700.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
4800.00†	0.000	176.432	4800.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
4900.00†	0.000	176.432	4900.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
5000.00†	0.000	176.432	5000.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	Delaware
5100.00†	0.000	176.432	5100.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
5200.00†	0.000	176.432	5200.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
5300.00†	0.000	176.432	5300.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
5400.00†	0.000	176.432	5400.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
5500.00†	0.000	176.432	5500.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
5600.00†	0.000	176.432	5600.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
5700.00†	0.000	176.432	5700.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
5800.00†	0.000	176.432	5800.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
5900.00†	0.000	176.432	5900.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
6000.00†	0.000	176.432	6000.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
6100.00†	0.000	176.432	6100.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
6200.00†	0.000	176.432	6200.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
6300.00†	0.000	176.432	6300.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
6400.00†	0.000	176.432	6400.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
6500.00†	0.000	176.432	6500.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
6600.00†	0.000	176.432	6600.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
6700.00†	0.000	176.432	6700.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
6800.00†	0.000	176.432	6800.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
6900.00†	0.000	176.432	6900.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
7000.00†	0.000	176.432	7000.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
7100.00†	0.000	176.432	7100.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
7200.00†	0.000	176.432	7200.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
7300.00†	0.000	176.432	7300.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
7400.00†	0.000	176.432	7400.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
7500.00†	0.000	176.432	7500.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
7600.00†	0.000	176.432	7600.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
7700.00†	0.000	176.432	7700.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
7800.00†	0.000	176.432	7800.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
7900.00†	0.000	176.432	7900.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
8000.00†	0.000	176.432	8000.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
8100.00†	0.000	176.432	8100.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
8200.00†	0.000	176.432	8200.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
8300.00†	0.000	176.432	8300.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
8400.00†	0.000	176.432	8400.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
8500.00†	0.000	176.432	8500.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	



Planned Wellpath Report

Rev-A.0
Page 4 of 5



REFERENCE WELLPATH IDENTIFICATION

Operator	Cimarex Energy Co.	Slot	No.6 SHL
Area	Lea County, NM	Well	No.6
Field	(Diamondtail) Sec 23, T23S, R32E	Wellbore	No.6 PWB
Facility	Diamondtail 23 Federal No.6		

WELLPATH DATA (151 stations) † = interpolated/extrapolated station

MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	Grid East [US ft]	Grid North [US ft]	Latitude	Longitude	DLS [°/100ft]	Comments
8550.00†	0.000	176.432	8550.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	Basal Brushy Canyon
8600.00†	0.000	176.432	8600.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
8700.00†	0.000	176.432	8700.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
8800.00†	0.000	176.432	8800.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
8855.00†	0.000	176.432	8855.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	Bone Spring
8900.00†	0.000	176.432	8900.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
9000.00†	0.000	176.432	9000.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
9100.00†	0.000	176.432	9100.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	
9198.00	0.000	176.432	9198.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	0.00	Est KOP
9200.00†	0.240	176.432	9200.00	0.00	0.00	0.00	754631.30	472314.30	32°17'47.682"N	103°38'34.938"W	12.01	
9275.34†	9.290	176.432	9275.00	6.26	-6.24	0.39	754631.69	472308.06	32°17'47.620"N	103°38'34.934"W	12.01	Avalon Shale
9300.00†	12.252	176.432	9299.22	10.86	-10.84	0.68	754631.98	472303.46	32°17'47.574"N	103°38'34.931"W	12.01	
9400.00†	24.264	176.432	9394.02	42.14	-42.05	2.62	754633.92	472272.25	32°17'47.266"N	103°38'34.910"W	12.01	
9500.00†	36.275	176.432	9480.22	92.45	-92.27	5.75	754637.05	472222.03	32°17'46.768"N	103°38'34.878"W	12.01	
9600.00†	48.287	176.432	9554.07	159.60	-159.29	9.93	754641.23	472155.01	32°17'46.105"N	103°38'34.834"W	12.01	
9700.00†	60.299	176.432	9612.33	240.66	-240.19	14.98	754646.28	472074.12	32°17'45.304"N	103°38'34.781"W	12.01	
9800.00†	72.310	176.432	9652.45	332.06	-331.41	20.67	754651.97	471982.90	32°17'44.401"N	103°38'34.722"W	12.01	
9900.00†	84.322	176.432	9672.66	429.81	-428.97	26.75	754658.05	471885.34	32°17'43.435"N	103°38'34.658"W	12.01	
9947.27	90.000	176.432	9675.00	477.00	-476.08	29.69	754660.99	471838.24	32°17'42.969"N	103°38'34.628"W	12.01	EOC
10000.00†	90.000	176.432	9675.00	529.73	-528.70	32.97	754664.27	471785.62	32°17'42.448"N	103°38'34.593"W	0.00	
10100.00†	90.000	176.432	9675.00	629.73	-628.51	39.19	754670.49	471685.82	32°17'41.460"N	103°38'34.528"W	0.00	
10200.00†	90.000	176.432	9675.00	729.73	-728.32	45.42	754676.72	471586.01	32°17'40.472"N	103°38'34.463"W	0.00	
10300.00†	90.000	176.432	9675.00	829.73	-828.12	51.64	754682.94	471486.21	32°17'39.484"N	103°38'34.398"W	0.00	
10400.00†	90.000	176.432	9675.00	929.73	-927.93	57.86	754689.16	471386.41	32°17'38.496"N	103°38'34.333"W	0.00	
10500.00†	90.000	176.432	9675.00	1029.73	-1027.73	64.09	754695.39	471286.61	32°17'37.508"N	103°38'34.268"W	0.00	
10600.00†	90.000	176.432	9675.00	1129.73	-1127.54	70.31	754701.61	471186.81	32°17'36.521"N	103°38'34.203"W	0.00	
10700.00†	90.000	176.432	9675.00	1229.73	-1227.35	76.54	754707.83	471087.00	32°17'35.533"N	103°38'34.138"W	0.00	
10800.00†	90.000	176.432	9675.00	1329.73	-1327.15	82.76	754714.06	470987.20	32°17'34.545"N	103°38'34.073"W	0.00	
10900.00†	90.000	176.432	9675.00	1429.73	-1426.96	88.98	754720.28	470887.40	32°17'33.557"N	103°38'34.008"W	0.00	
11000.00†	90.000	176.432	9675.00	1529.73	-1526.76	95.21	754726.50	470787.60	32°17'32.569"N	103°38'33.943"W	0.00	
11100.00†	90.000	176.432	9675.00	1629.73	-1626.57	101.43	754732.73	470687.80	32°17'31.581"N	103°38'33.878"W	0.00	
11200.00†	90.000	176.432	9675.00	1729.73	-1726.38	107.66	754738.95	470587.99	32°17'30.593"N	103°38'33.813"W	0.00	
11300.00†	90.000	176.432	9675.00	1829.73	-1826.18	113.88	754745.17	470488.19	32°17'29.605"N	103°38'33.748"W	0.00	
11400.00†	90.000	176.432	9675.00	1929.73	-1925.99	120.10	754751.40	470388.39	32°17'28.617"N	103°38'33.683"W	0.00	
11500.00†	90.000	176.432	9675.00	2029.73	-2025.80	126.33	754757.62	470288.59	32°17'27.629"N	103°38'33.618"W	0.00	
11600.00†	90.000	176.432	9675.00	2129.73	-2125.60	132.55	754763.85	470188.79	32°17'26.641"N	103°38'33.553"W	0.00	
11700.00†	90.000	176.432	9675.00	2229.73	-2225.41	138.77	754770.07	470088.98	32°17'25.653"N	103°38'33.488"W	0.00	
11800.00†	90.000	176.432	9675.00	2329.73	-2325.21	145.00	754776.29	469989.18	32°17'24.665"N	103°38'33.423"W	0.00	
11900.00†	90.000	176.432	9675.00	2429.73	-2425.02	151.22	754782.52	469889.38	32°17'23.677"N	103°38'33.358"W	0.00	
12000.00†	90.000	176.432	9675.00	2529.73	-2524.83	157.45	754788.74	469789.58	32°17'22.689"N	103°38'33.293"W	0.00	
12100.00†	90.000	176.432	9675.00	2629.73	-2624.63	163.67	754794.96	469689.78	32°17'21.701"N	103°38'33.228"W	0.00	
12200.00†	90.000	176.432	9675.00	2729.73	-2724.44	169.89	754801.19	469589.97	32°17'20.713"N	103°38'33.163"W	0.00	
12300.00†	90.000	176.432	9675.00	2829.73	-2824.24	176.12	754807.41	469490.17	32°17'19.725"N	103°38'33.098"W	0.00	
12400.00†	90.000	176.432	9675.00	2929.73	-2924.05	182.34	754813.63	469390.37	32°17'18.737"N	103°38'33.033"W	0.00	
12500.00†	90.000	176.432	9675.00	3029.73	-3023.86	188.57	754819.86	469290.57	32°17'17.749"N	103°38'32.968"W	0.00	



Planned Wellpath Report

Rev-A.0
Page 5 of 5



REFERENCE WELLPATH IDENTIFICATION			
Operator	Cimarex Energy Co.	Slot	No.6 SHL
Area	Lea County, NM	Well	No.6
Field	(Diamondtail) Sec 23, T23S, R32E	Wellbore	No.6 PWB
Facility	Diamondtail 23 Federal No.6		

WELLPATH DATA (151 stations) † = interpolated/extrapolated station												
MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	Grid East [US ft]	Grid North [US ft]	Latitude	Longitude	DLS [°/100ft]	Comments
12600.00†	90.000	176.432	9675.00	3129.73	-3123.66	194.79	754826.08	469190.76	32°17'16.761"N	103°38'32.903"W	0.00	
12700.00†	90.000	176.432	9675.00	3229.73	-3223.47	201.01	754832.30	469090.96	32°17'15.773"N	103°38'32.838"W	0.00	
12800.00†	90.000	176.432	9675.00	3329.73	-3323.27	207.24	754838.53	468991.16	32°17'14.785"N	103°38'32.773"W	0.00	
12900.00†	90.000	176.432	9675.00	3429.73	-3423.08	213.46	754844.75	468891.36	32°17'13.797"N	103°38'32.708"W	0.00	
13000.00†	90.000	176.432	9675.00	3529.73	-3522.89	219.68	754850.98	468791.56	32°17'12.809"N	103°38'32.643"W	0.00	
13100.00†	90.000	176.432	9675.00	3629.73	-3622.69	225.91	754857.20	468691.75	32°17'11.821"N	103°38'32.578"W	0.00	
13200.00†	90.000	176.432	9675.00	3729.73	-3722.50	232.13	754863.42	468591.95	32°17'10.834"N	103°38'32.513"W	0.00	
13300.00†	90.000	176.432	9675.00	3829.73	-3822.31	238.36	754869.65	468492.15	32°17'09.846"N	103°38'32.448"W	0.00	
13400.00†	90.000	176.432	9675.00	3929.73	-3922.11	244.58	754875.87	468392.35	32°17'08.858"N	103°38'32.383"W	0.00	
13500.00†	90.000	176.432	9675.00	4029.73	-4021.92	250.80	754882.09	468292.55	32°17'07.870"N	103°38'32.318"W	0.00	
13600.00†	90.000	176.432	9675.00	4129.73	-4121.72	257.03	754888.32	468192.74	32°17'06.882"N	103°38'32.253"W	0.00	
13700.00†	90.000	176.432	9675.00	4229.73	-4221.53	263.25	754894.54	468092.94	32°17'05.894"N	103°38'32.188"W	0.00	
13800.00†	90.000	176.432	9675.00	4329.73	-4321.34	269.48	754900.76	467993.14	32°17'04.906"N	103°38'32.123"W	0.00	
13900.00†	90.000	176.432	9675.00	4429.73	-4421.14	275.70	754906.99	467893.34	32°17'03.918"N	103°38'32.058"W	0.00	
14000.00†	90.000	176.432	9675.00	4529.73	-4520.95	281.92	754913.21	467793.54	32°17'02.930"N	103°38'31.993"W	0.00	
14097.83	90.000	176.432	9675.00	4627.56	-4618.59	288.01	754919.30	467695.90	32°17'01.963"N	103°38'31.929"W	0.00	No 6 PBHL

TARGETS									
Name	MD [ft]	TVD [ft]	North [ft]	East [ft]	Grid East [US ft]	Grid North [US ft]	Latitude	Longitude	Shape
1) No.6 PBHL (Rev-0)	14097.83	9675.00	-4618.59	288.01	754919.30	467695.90	32°17'01.963"N	103°38'31.929"W	point

SURVEY PROGRAM - Ref Wellbore: No.6 PWB · Ref Wellpath: Rev-A.0				
Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
0.00	14097.83	NaviTrak (Standard)		No.6 PWB

SR & A



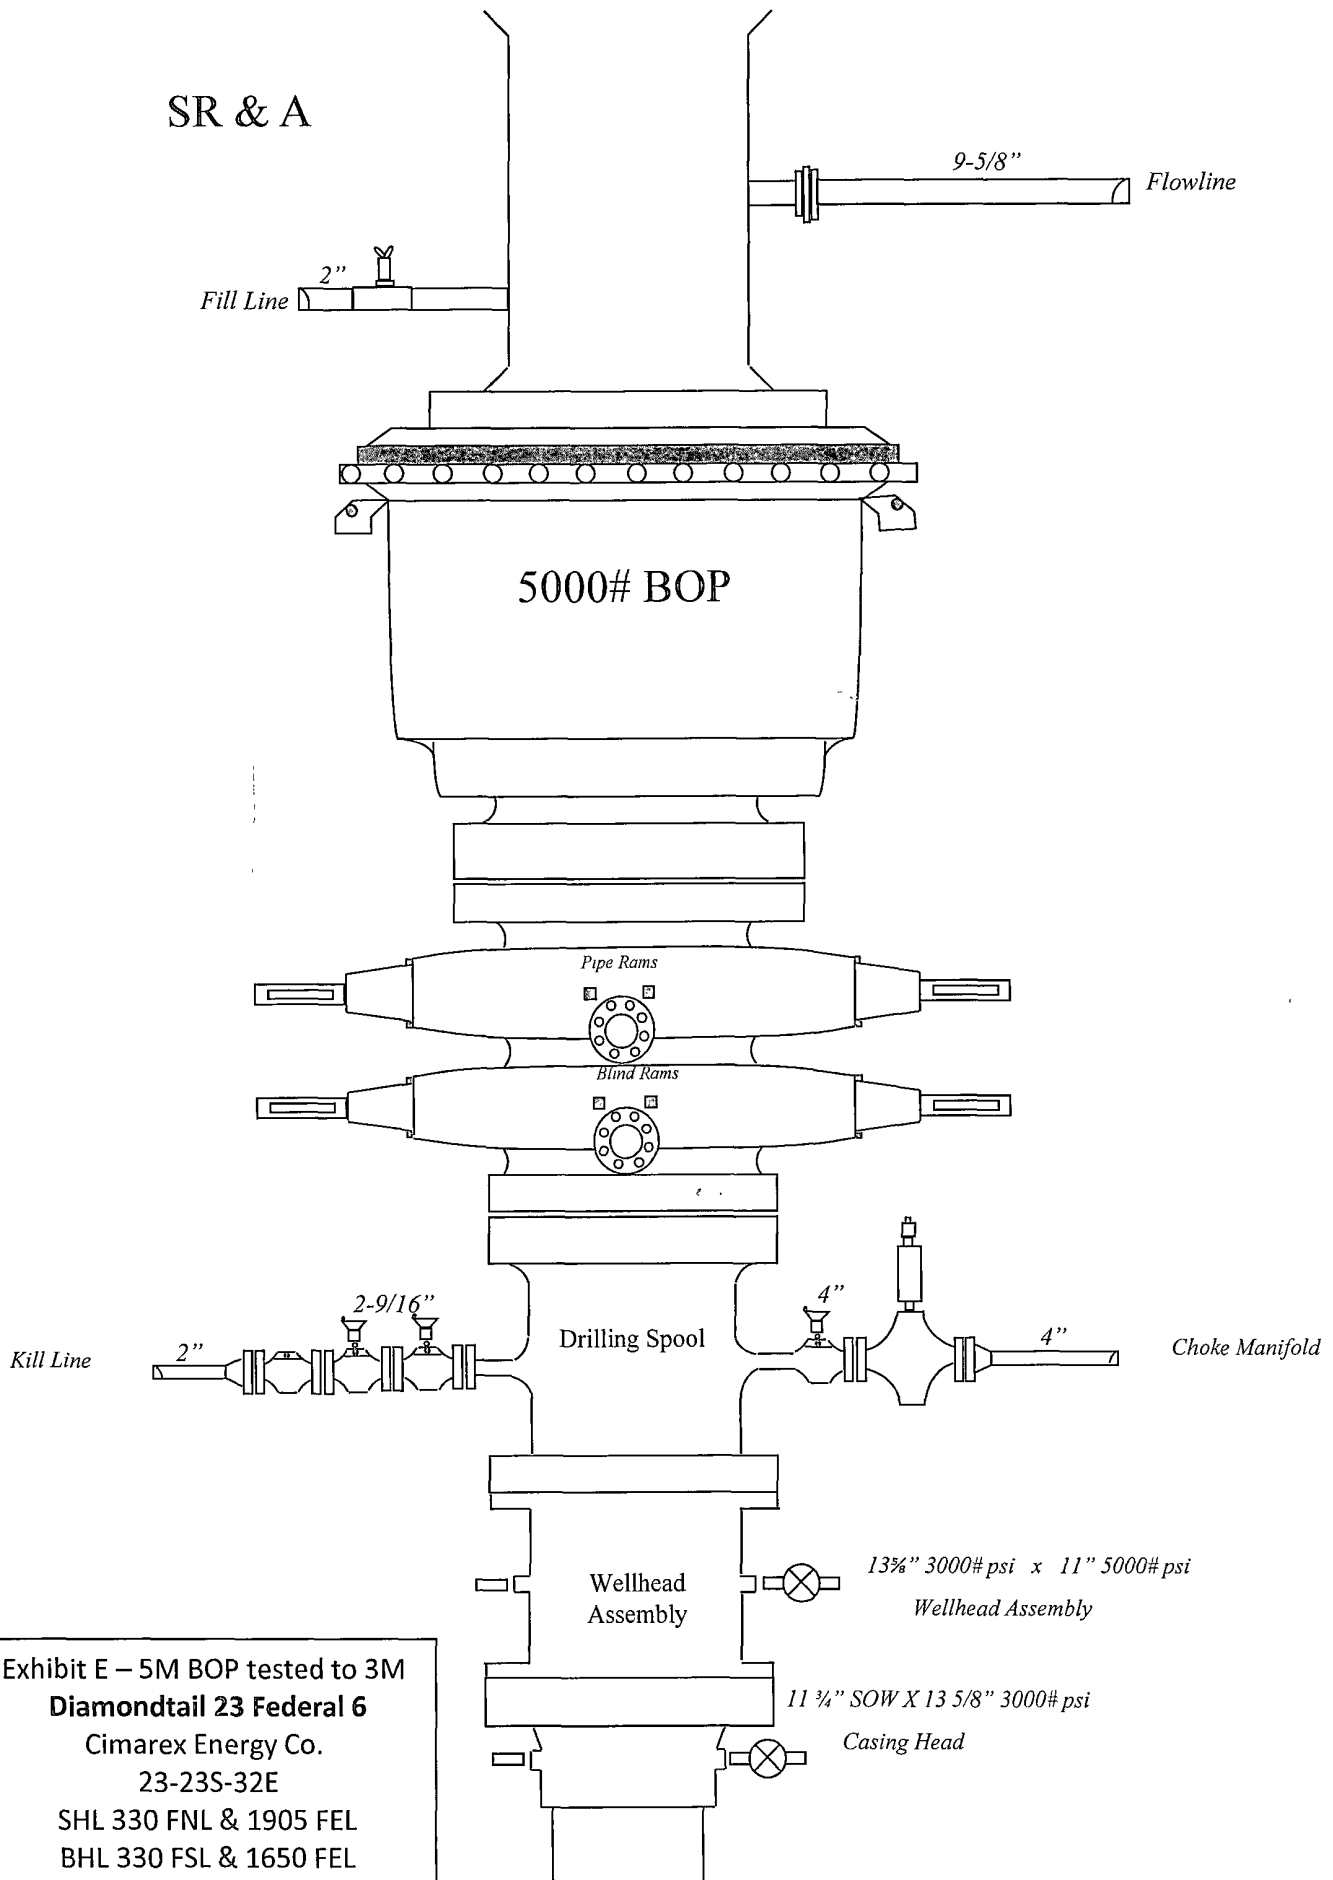


Exhibit E – 5M BOP tested to 3M
Diamondtail 23 Federal 6
Cimarex Energy Co.
23-23S-32E
SHL 330 FNL & 1905 FEL
BHL 330 FSL & 1650 FEL
Lea County, NM

Exhibit E-1 – Choke Manifold Diagram
Diamondtail 23 Federal 6
Cimarex Energy Co.
23-23S-32E
SHL 330 FNL & 1905 FEL
BHL 330 FSL & 1650 FEL
Lea County, NM

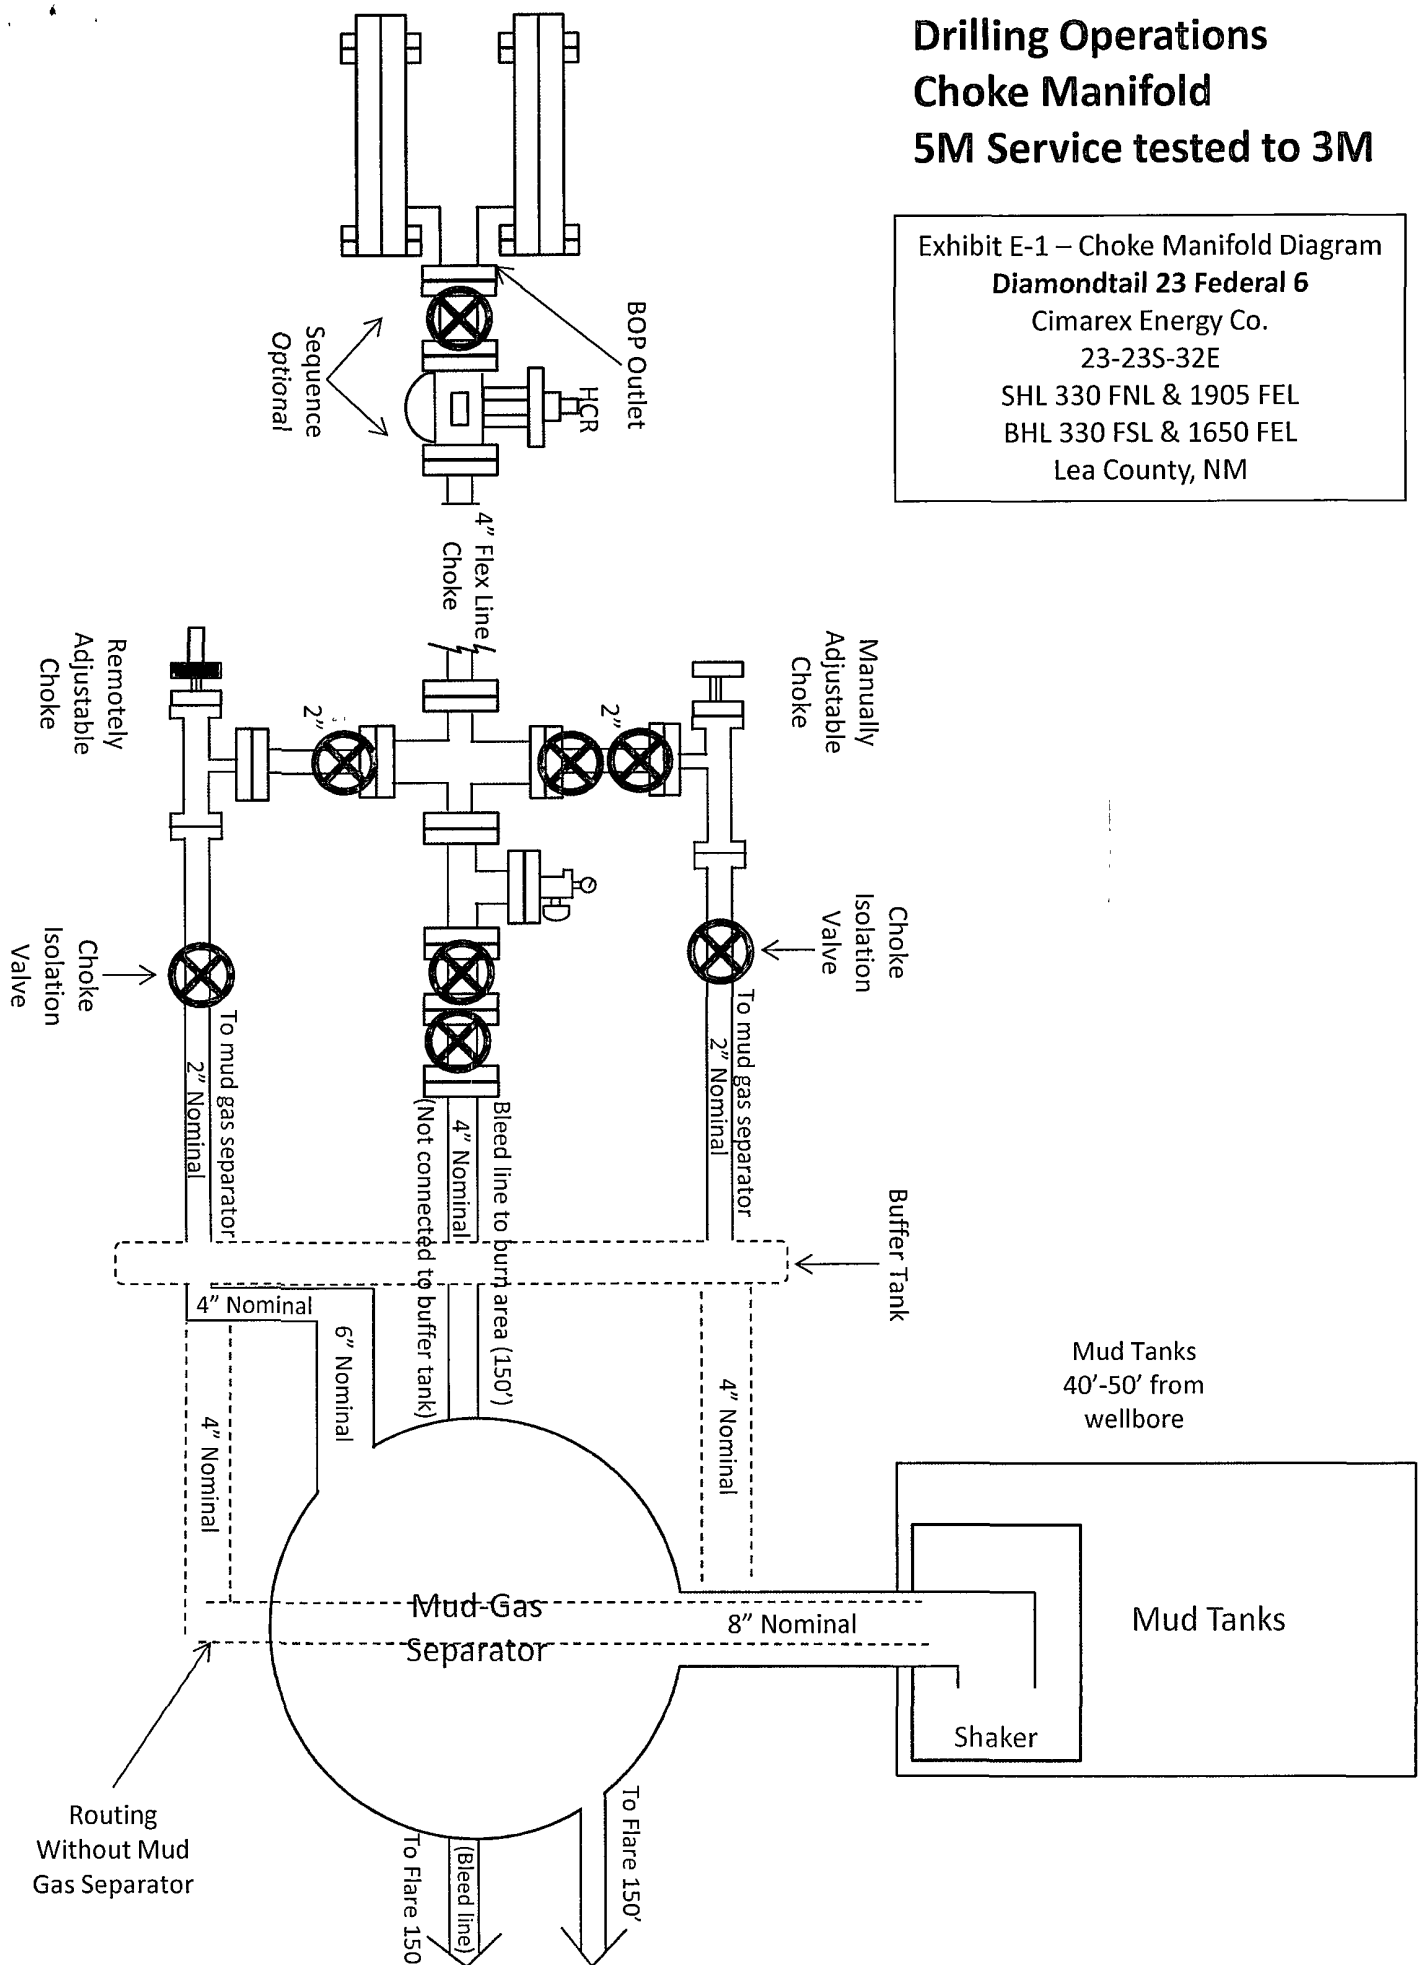

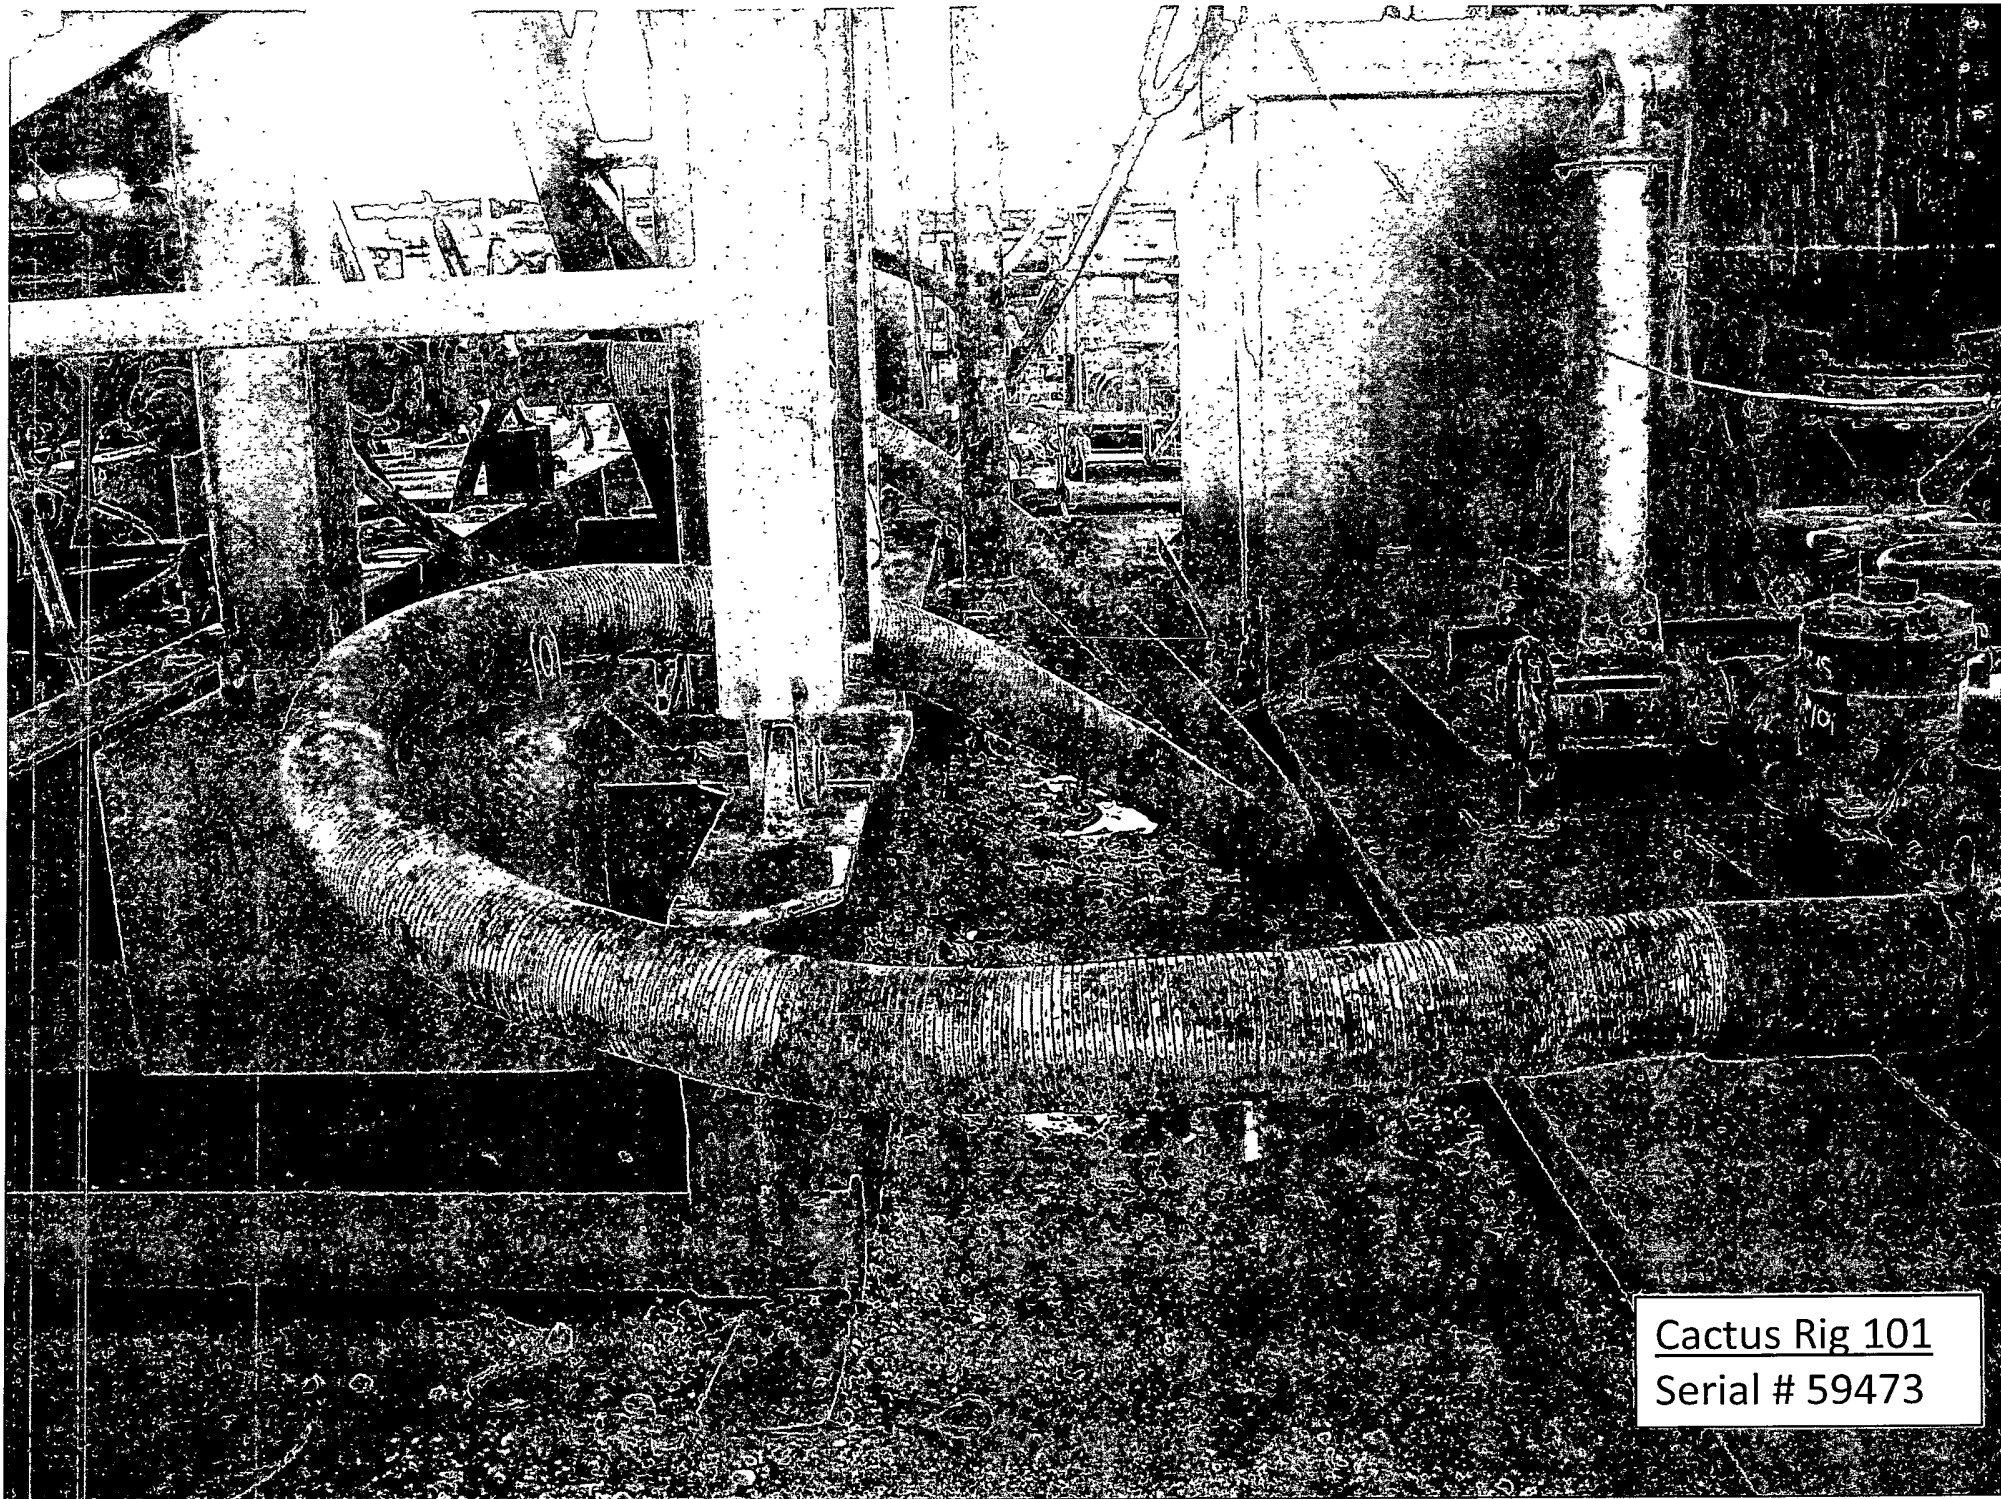

Cactus Rig 101
Serial # 59473

M I D W E S T
HOSE AND SPECIALTY INC.

INTERNAL HYDROSTATIC TEST REPORT			
Customer: CACTUS		P.O. Number: Rig#101 Asset#M5358	
HOSE SPECIFICATIONS			
Type: CHOKER LINE		Length: 35'	
I.D. 4" INCHES		O.D. 8" INCHES	
WORKING PRESSURE 10,000 PSI	TEST PRESSURE 15,000 PSI		BURST PRESSURE PSI
COUPLINGS			
Type of End Fitting 4 1/16 10K FLANGE			
Type of Coupling: SWEDGED		MANUFACTURED BY MIDWEST HOSE & SPECIALTY	
PROCEDURE			
<i>Hose assembly pressure tested with water at ambient temperature.</i>			
TIME HELD AT TEST PRESSURE 15 MIN.		ACTUAL BURST PRESSURE: 0 PSI	
COMMENTS: s/n#59473 Asset#M5358 Hose is covered with stainless steel armour cover and wrapped with fire resistant vermiculite coated fiberglass insulation rated for 1500 degrees complete with lifting eyes			
Date: 5/19/2010	Tested By: BOBBY FINK		Approved: MENDI JACKSON




Midwest Hose
& Specialty, Inc.

Specification Sheet Choke & Kill Hose

The Midwest Hose & Specialty Choke & Kill hose is manufactured with only premium components. The reinforcement cables, inner liner and cover are made of the highest quality material to handle the tough drilling applications of today's industry. The end connections are available with API flanges, API male threads, hubs, hammer unions or other special fittings upon request. Hose assembly is manufactured to API 7K. This assembly is wrapped with fire resistant vermiculite coated fiberglass insulation, rated at 2000 degrees with stainless steel armor cover.

Working Pressure:	5,000 or 10,000 psi working pressure
Test Pressure:	10,000 or 15,000 psi test pressure
Reinforcement:	Multiple steel cables
Cover:	Stainless Steel Armor
Inner Tube:	Petroleum resistant, Abrasion resistant
End Fitting:	API flanges, API male threads, threaded or butt weld hammer unions, unbolt and other special connections
Maximum Length:	110 Feet
ID:	2-1/2", 3", 3-1/2", 4"
Operating Temperature:	-22 deg F to +180 deg F (-30 deg C to +82 deg C)

Cactus 101

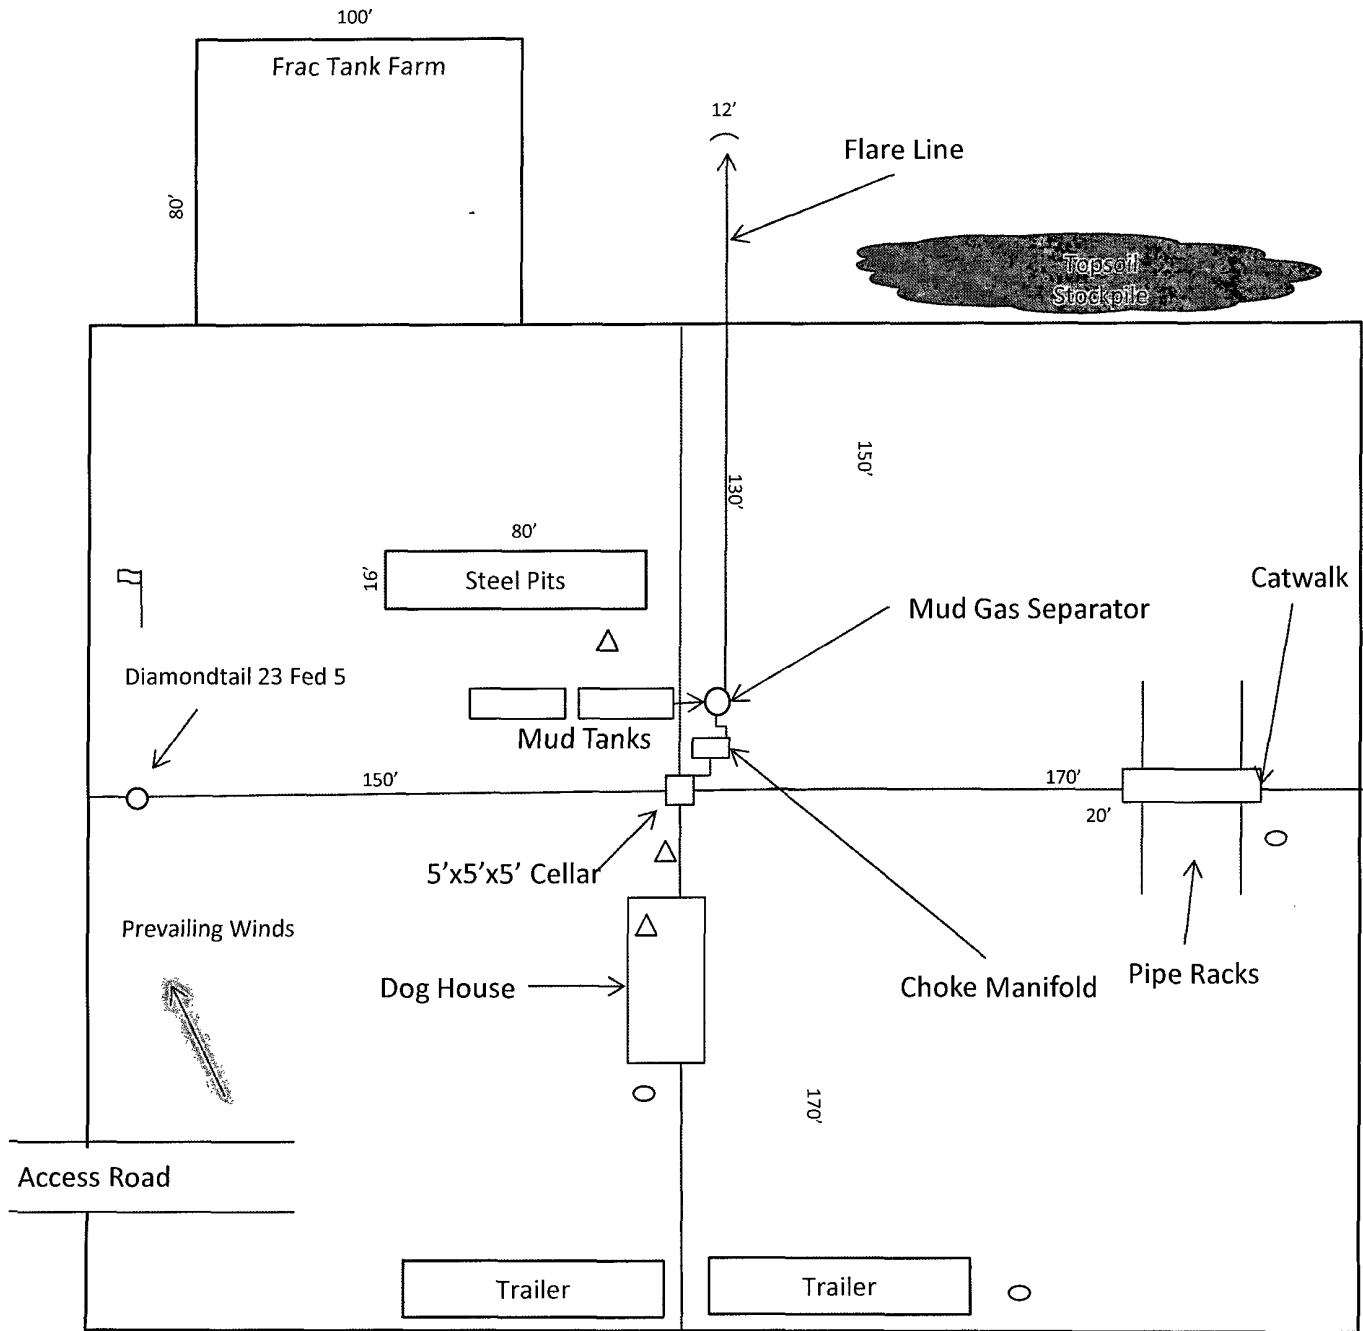

-  Wind Direction Indicators (wind sock or streamers)
-  • H2S Monitors (alarms at bell nipple and shale shaker)
-  Briefing Areas

N



Exhibit D – Rig Diagram
Diamondtail 23 Federal 6
 Cimarex Energy Co.
 23-23S-32E
 SHL 330 FNL & 1905 FEL
 BHL 330 FSL & 1650 FEL
 Lea County, NM