

Office

Energy, Minerals and Natural Resources

June 19, 2008

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-025-25126

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

E-794

7. Lease Name or Unit Agreement Name

YATES STATE

8. Well Number #1

9. OGRID Number 277558

10. Pool name or Wildcat:

North Vacuum Abo

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

LIME ROCK RESOURCES II-A, L.P.

3. Address of Operator

c/o Mike Pippin LLC, 3104 N. Sullivan, Farmington, NM 87401.

4. Well Location

Unit Letter P : 660 feet from the SOUTH line and 460 feet from the EAST line

Section 9 Township 17-S Range 34-E NMPM Lea County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

4066' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐PLUG AND ABANDON ☒TEMPORARILY ABANDON ☐CHANGE PLANS ☐PULL OR ALTER CASING ☐MULTIPLE COMPL ☐DOWNHOLE COMMINGLE ☐

OTHER:

P&A

☒

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ALTERING CASING ☐COMMENCE DRILLING OPNS. ☐P AND A ☐CASING/CEMENT JOB ☐

OTHER:

☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Lime Rock would like to P&A this well as follows: MIRUSU. TOH w/all production equipment. Set a 4-1/2" CIBP @ ~8780' & top w/25 sx cmt (will fill csg to about 8450'). Circ csg w/P&A mud. W/tbg @ 6188', pump a balanced 25 sx cmt plug. This should fill the 4-1/2" csg from 6188' to ~5858' & cover the top of the Glorieta (6138'). W/tbg @ 4790', pump a balanced 25 sx cmt plug. This should fill the 4-1/2" csg from 4790' to ~4460' & cover the top of the San Andres (4740'). W/tbg @ 1792', pump a balanced 25 sx cmt plug. This should fill the 4-1/2" csg from 1792' to ~1462' & cover the base of the salt (1742') and the surface csg shoe (1692'). W/tbg @ 300', circ cmt to surface. TOH. Cut off wellhead 3' below GL & top off csgs w/cmt. Install P&A marker with cmt to comply w/regulations. RDMO location. Cut off anchors & restore location. See attached wellbore diagrams.

Spud Date: 10/1/75

Drilling Rig Release Date: 10/31/75

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE Petroleum Engineer - Agent

DATE 10/4/12

Type or print name Mike Pippin

E-mail address: mike@pippinllc.com

PHONE: 505-327-4573

For State Use Only

APPROVED BY:

TITLE Dist Mgr

DATE 10-10-2012

Conditions of Approval (if any):

Oil Conservation Division - Hobbs office. **Must be Notified 24 hours prior** to the beginning of Plugging Operations begin

OCT 10 2012

YATES STATE #1

CURRENT

North Vacuum Abo

(p) Section 9, T-17-S, R-34-E, Lea County, NM

Today's Date: 10/4/12

Spud: 10/1/75

Completed: 12/1/75

Elevation: 4066' GL

Rustler @ 1642'

Base of Salt @ 1742'

12-1/4" hole

12/27/06: pumped 320 sx cmt
between 8-5/8" & 4-1/2" csqs

12/27/06: Calc base of cmt @ 1528'

8-5/8" 24# Casing @ 1690'
Cmt w/860 sxs

TOC @ 3220' @ 75% Eff.

Sq csg leaks @ 4129'-61'
w/250 sx

San Andres @ 4740'

Sq csg leaks @ 5038'-5101'
w/200 sx

Glorieta @ 6138'

2-3/8" TBG @ 8893'


Abo @ 8826'

Abo Perforations:
8826'-8858'

7-7/8" hole

TD 9044'

4-1/2" 10.5&11.6# Casing @ 9036'
Cmt with 450 sx

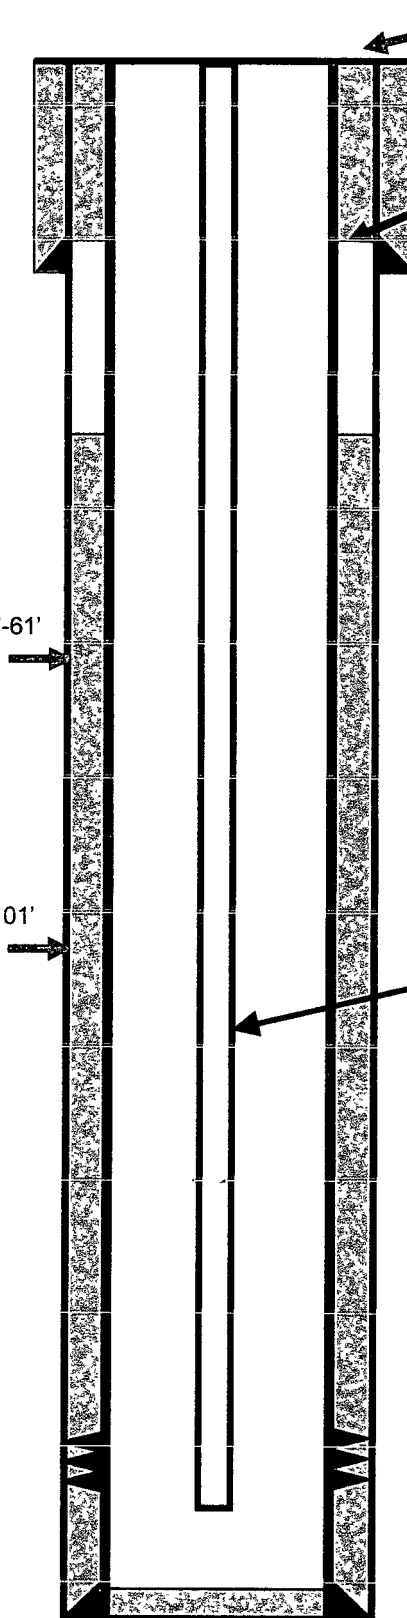

Proposed P & A
North Vacuum Abo
(p) Section 9, T-17-S, R-34-E, Lea County, NM

4-1/2" 10.5&11.6# Casing @ 9036'
Cmt with 450 sx